

# **PROBLEM SUMMARY**

Sample Rating Trend

DIRT


# BRADEN 8703913

Component

**Boom Hoist** 

**CHEVRON MEROPA 220 (--- QTS)** 

#### **COMPONENT CONDITION SUMMARY**

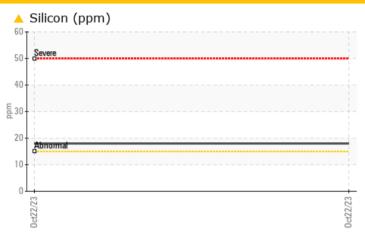

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL						
Silicon	ppm	ASTM D5185m	>15	<u> </u>						

**Customer Id: SEALAF Sample No.:** WC0856570 Lab Number: 05999165 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## RECOMMENDED ACTIONS


There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

NDT Sal



DIRT



**BRADEN 8703913** 

Component

**Boom Hoist** 

**CHEVRON MEROPA 220 (--- QTS)** 

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

Elemental level of silicon (Si) above normal.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Oct2023		
CAMPLE INCOR	AATIONI	and the seal			folia ta consider	In late way O
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0856570		
Sample Date		Client Info		22 Oct 2023		
Machine Age	yrs	Client Info		1		
Oil Age	yrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	48		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	5		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	O I IVV o mt	biotomit	hiotom/0
ADDITIVES				current	history1	history2
Boron	ppm	ASTM D5185m	40	<1		
Barium	ppm	ASTM D5185m		4		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		5		
Phosphorus	ppm	ASTM D5185m	270	262		
Zinc	ppm	ASTM D5185m		105		
Sulfur	ppm	ASTM D5185m	8600	10663		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<u> </u>		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.64	0.21		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		



## **OIL ANALYSIS REPORT**

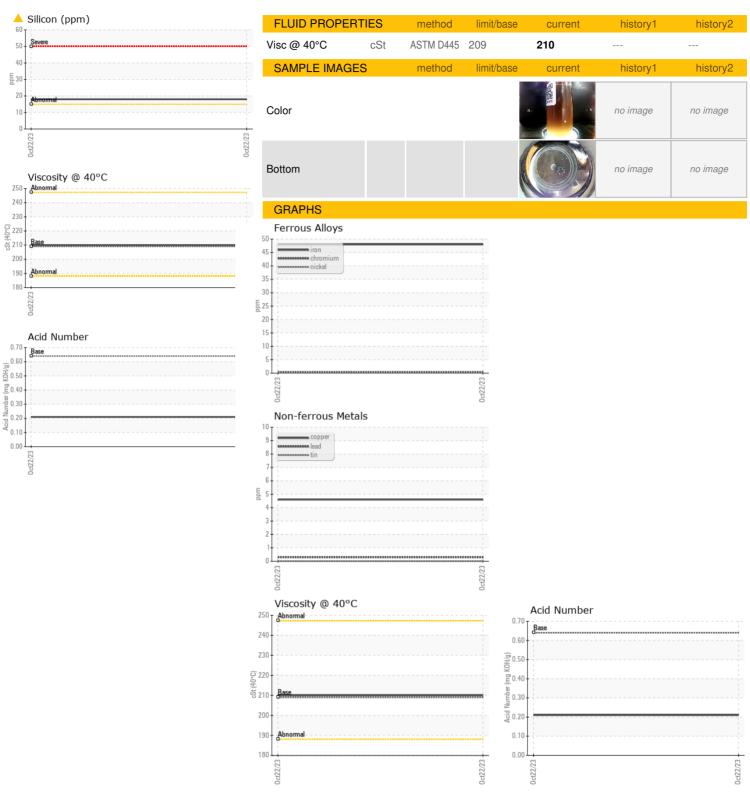



Certificate L2367

Laboratory Sample No. Lab Number

: WC0856570 : 05999165 Unique Number : 10727525 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 06 Nov 2023 Diagnosed : 07 Nov 2023

Diagnostician : Don Baldridge

Contact: LORIA HUVAL LORIA.HUVAL@SEATRAX.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (337)706-7901

308 GALBERT ROAD

**SEATRAX INC** 

LAFAYETTE, LA

US 70506