



# PROBLEM SUMMARY


Sample Rating Trend




Machine Id  
**FORKLIFT 45007**  
 Component  
**Diesel Engine**  
 Fluid  
**KENDALL 15W40 (--- QTS)**

## COMPONENT CONDITION SUMMARY


### ▲ Ferrous Alloys

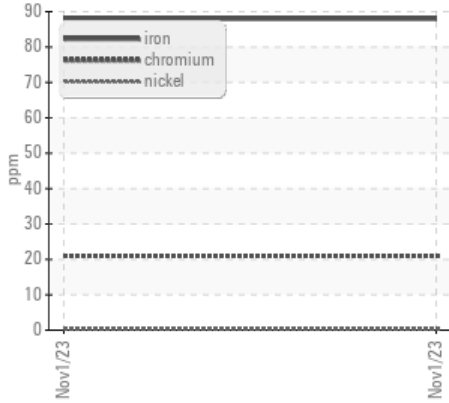

### ▲ Silicon (ppm)

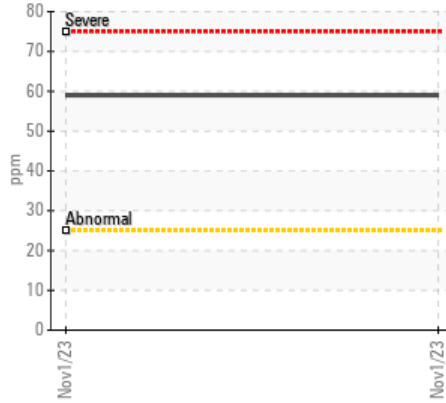

### ▲ Aluminum (ppm)

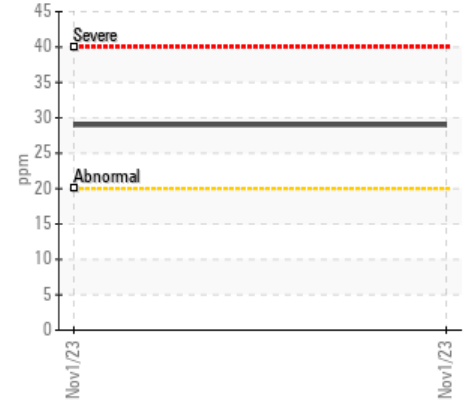

## RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL		---	---
Chromium	ppm	ASTM D5185m >20	▲ 21	---
Aluminum	ppm	ASTM D5185m >20	▲ 29	---
Silicon	ppm	ASTM D5185m >25	▲ 59	---

Customer Id: GREGRETN  
 Sample No.: WC0867803  
 Lab Number: 05999680  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

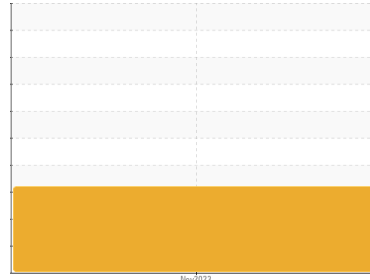

DIRT



Machine Id  
**FORKLIFT 45007**  
 Component  
**Diesel Engine**  
 Fluid  
**KENDALL 15W40 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### ▲ Wear

The chromium level is abnormal. All other component wear rates are normal.

### ▲ Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0867803</b>	---	---
Sample Date	Client Info	<b>01 Nov 2023</b>	---	---
Machine Age	hrs Client Info	<b>6484</b>	---	---
Oil Age	hrs Client Info	<b>473</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	---	---
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>88</b>	---	---
Chromium	ppm ASTM D5185m >20	<b>▲ 21</b>	---	---
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m	<b>82</b>	---	---
Silver	ppm ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >20	<b>▲ 29</b>	---	---
Lead	ppm ASTM D5185m >40	<b>0</b>	---	---
Copper	ppm ASTM D5185m >330	<b>1</b>	---	---
Tin	ppm ASTM D5185m >15	<b>4</b>	---	---
Vanadium	ppm ASTM D5185m	<b>2</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 6.3	<b>20</b>	---	---
Barium	ppm ASTM D5185m 0.6	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m 0.4	<b>6</b>	---	---
Manganese	ppm ASTM D5185m	<b>5</b>	---	---
Magnesium	ppm ASTM D5185m 277	<b>448</b>	---	---
Calcium	ppm ASTM D5185m 1514	<b>2077</b>	---	---
Phosphorus	ppm ASTM D5185m 634	<b>1053</b>	---	---
Zinc	ppm ASTM D5185m 743	<b>1305</b>	---	---
Sulfur	ppm ASTM D5185m 2592	<b>4017</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>▲ 59</b>	---	---
Sodium	ppm ASTM D5185m	<b>25</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>8</b>	---	---

## INFRA-RED






method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>12.3</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>27.7</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.1</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>4.7</b>	---	---







# OIL ANALYSIS REPORT

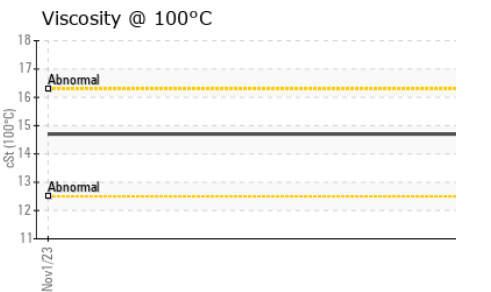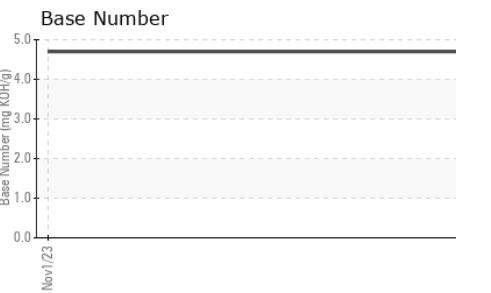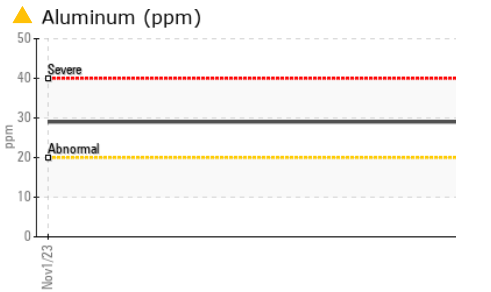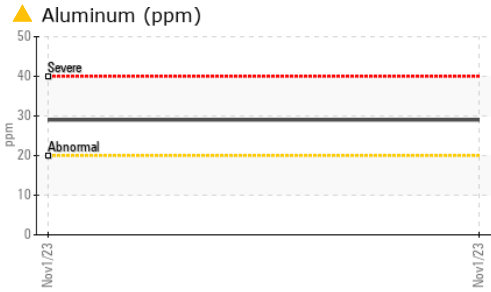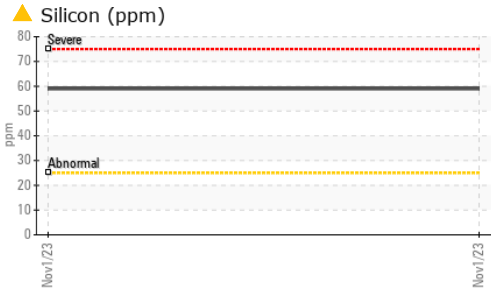

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.7	---	---

### GRAPHS

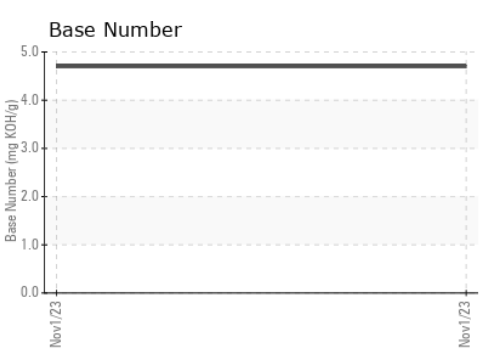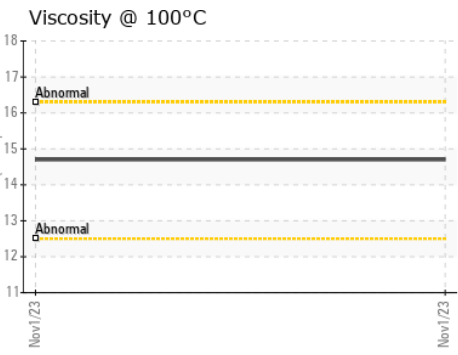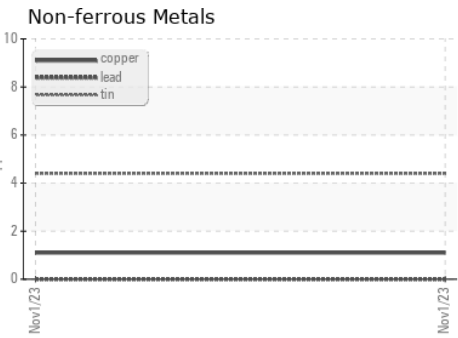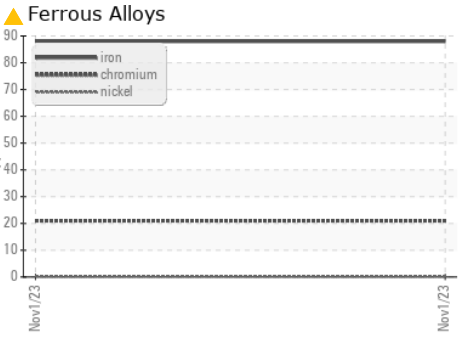

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0867803 **Received** : 06 Nov 2023  
**Lab Number** : 05999680 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10728040 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GREENEVILLE OIL & PETROLEUM INC**  
 860 WEST ANDREW JOHNSON HWY  
 GREENEVILLE, TN  
 US 37745  
 Contact: SHOP  
 shop@burkharterterprises.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)