


OIL ANALYSIS REPORT

RIPPEY [200005325] 82210 SITE 7

Component Wind Turbine Gearbox

CASTROL OPTIGEAR SYNTHETIC X 320 (340 LTR)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		1ct2012 Oct201	3 Oct2014 Jan2016 Jur	2017 Nov2019 Oct2020 Nov2021	Mar2023	
SAMPLE INFORMA	NOITA	method	limit/base	current	history1	history2
Sample Number		Client Info		NX05999829	NX05913481	NX05672243
Sample Date		Client Info		14 Sep 2023	10 Mar 2023	13 Jul 2022
Machine Age	nrs	Client Info		0	0	0
Oil Age	nrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	7	13	7
Iron p	opm	ASTM D5185m	>150	2	3	3
Chromium	opm	ASTM D5185m	>5	0	0	0
Nickel	opm	ASTM D5185m	>10	0	0	0
Titanium	opm	ASTM D5185m	>10	0	0	0
Silver	opm	ASTM D5185m		0	0	0
Aluminum	opm	ASTM D5185m	>10	4	<1	0
Lead	opm	ASTM D5185m	>20	0	<1	0
Copper	opm	ASTM D5185m	>50	8	6	2
Tin p	opm	ASTM D5185m	>10	0	0	0
Antimony	opm	ASTM D5185m	>5			
Vanadium	opm	ASTM D5185m		0	<1	0
Cadmium	opm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	opm	ASTM D5185m		39	0	0
	opm	ASTM D5185m		0	0	5
Molybdenum	opm	ASTM D5185m	1150	740	822	738
Manganese	opm	ASTM D5185m		0	<1	<1
	opm	ASTM D5185m		6	4	5
	opm	ASTM D5185m	2000	1443	1709	1409
	opm	ASTM D5185m	400	340	381	306
Zinc	opm	ASTM D5185m	0	0	0	1
Sulfur	opm	ASTM D5185m	1850	1669	2164	1805
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	opm	ASTM D5185m	>50	11	9	10
Sodium	opm	ASTM D5185m	>20	7	8	5
Potassium	opm	ASTM D5185m	>20	0	0	2
Water	%	ASTM D6304	>0.05	0.024	0.010	0.023
ppm Water	opm	ASTM D6304	>500	246.6	108.0	237.2
FLUID CLEANLINE	SS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7711	76124	7156
Particles >6µm		ASTM D7647	>2500	1798	<u>11460</u>	634
Particles >14µm		ASTM D7647	>320	59	79	25
Particles >21µm		ASTM D7647	>80	12	7	3
Particles >38µm		ASTM D7647	>20	1	1	0
Dortiolog - 71 um		ASTM D7647	>4	•	1	0
Particles >71μm		AO INI DI OTI	/ T	0	1	U
Oil Cleanliness		ISO 4406 (c)	>/18/15	20/18/13	△ 23/21/13	20/16/12



OIL ANALYSIS REPORT

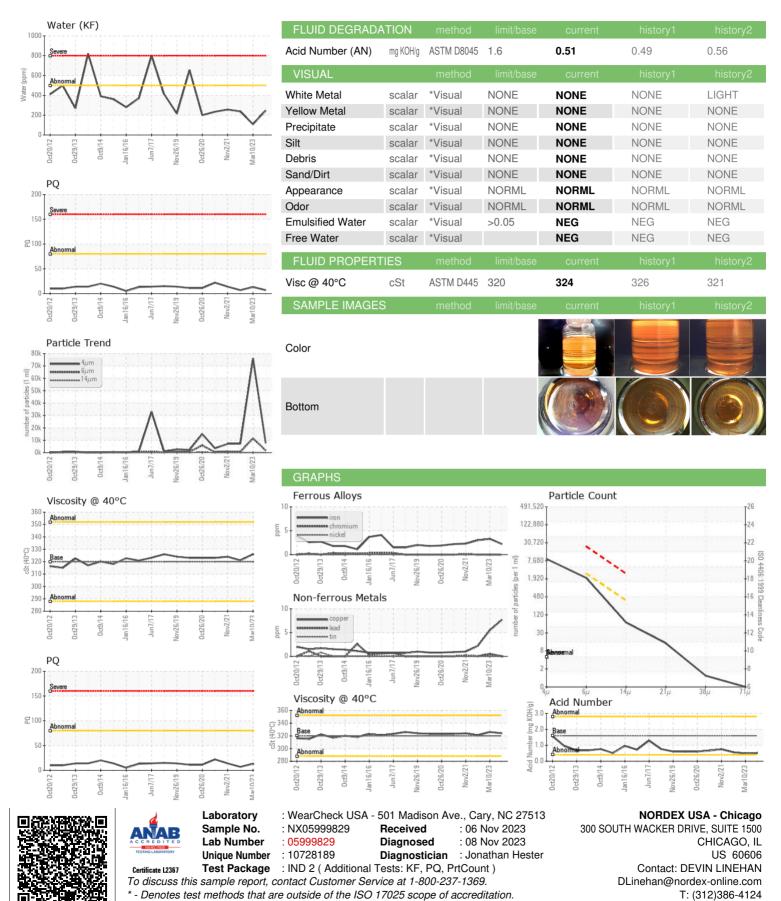

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (312)386-7102