




OIL ANALYSIS REPORT

Sample Rating Trend

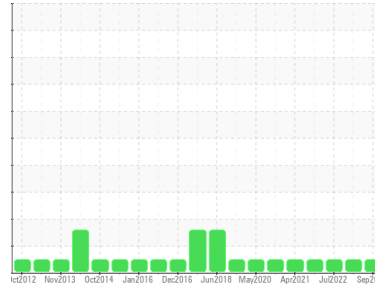

NORMAL



Area
RIPPEY [200005325]
 Machine Id
82208 SITE 8

Component
Wind Turbine Gearbox
 Fluid
CASTROL OPTIGEAR SYNTHETIC X 320 (340 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	NX05999844	NX05913484	NX05672239
Sample Date	Client Info	18 Sep 2023	17 Mar 2023	20 Jul 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2		
PQ	ASTM D8184	>80	10	13	3	
Iron	ppm	ASTM D5185m	>150	4	4	5
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	4	<1	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	1	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m	>5	---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		39	0	0
Barium	ppm	ASTM D5185m		0	0	5
Molybdenum	ppm	ASTM D5185m	1150	749	819	728
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		7	4	5
Calcium	ppm	ASTM D5185m	2000	1481	1723	1421
Phosphorus	ppm	ASTM D5185m	400	339	381	310
Zinc	ppm	ASTM D5185m	0	0	0	<1
Sulfur	ppm	ASTM D5185m	1850	1647	2137	1797

CONTAMINANTS






method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>50	11	8	8
Sodium	ppm	ASTM D5185m	>20	7	7	4
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water	%	ASTM D6304	>0.05	0.013	0.011	0.032
ppm Water	ppm	ASTM D6304	>500	134.3	111.7	328.4

FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647		795	685	197
Particles >6µm	ASTM D7647	>2500	277	225	49
Particles >14µm	ASTM D7647	>320	23	26	6
Particles >21µm	ASTM D7647	>80	6	8	2
Particles >38µm	ASTM D7647	>20	1	0	1
Particles >71µm	ASTM D7647	>4	1	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/15	17/15/12	17/15/12	15/13/10



OIL ANALYSIS REPORT

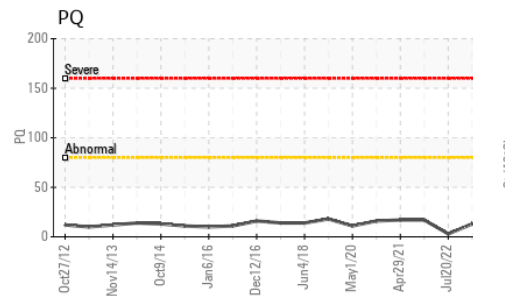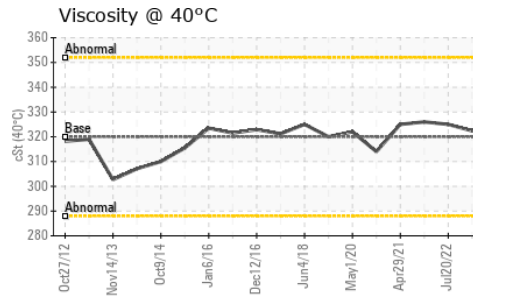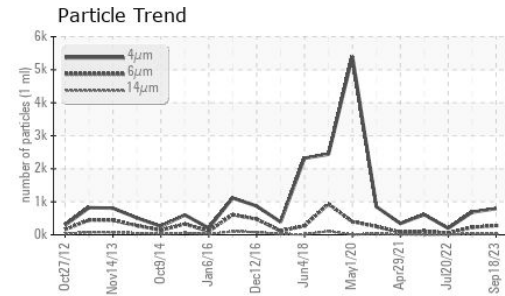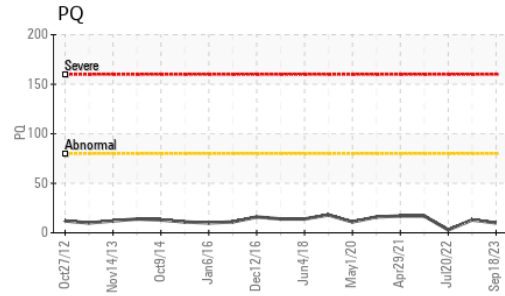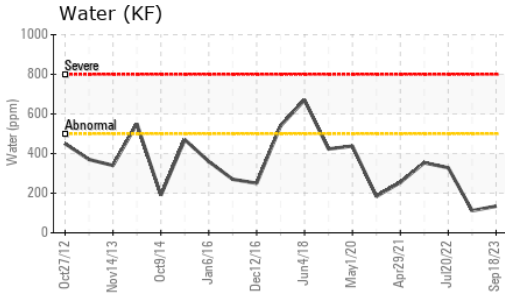


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	0.54	0.52	0.51






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	323	322.4	325

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

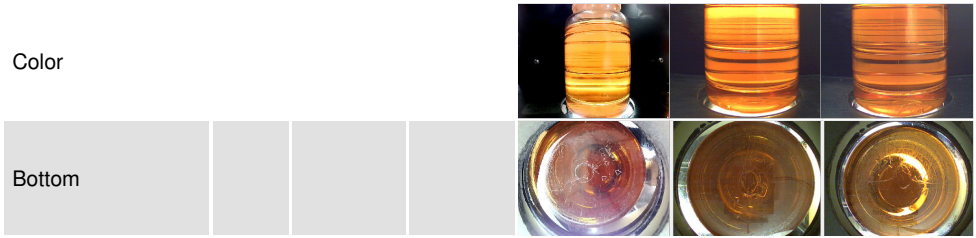

GRAPHS

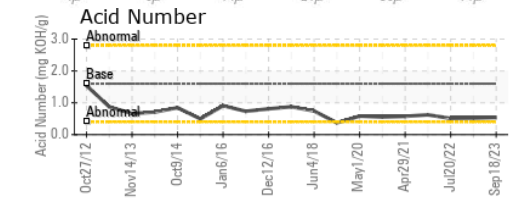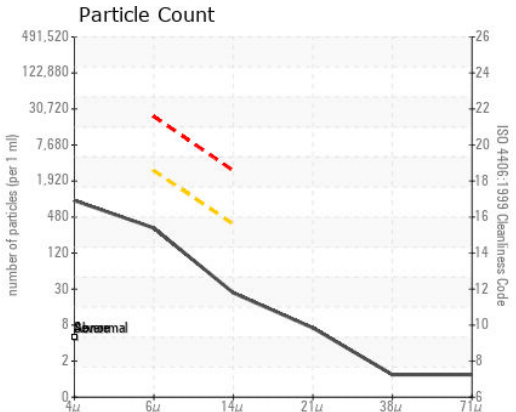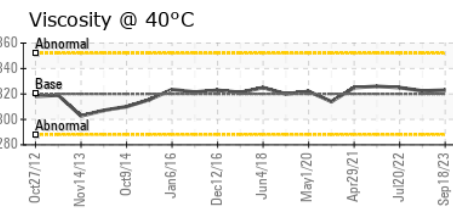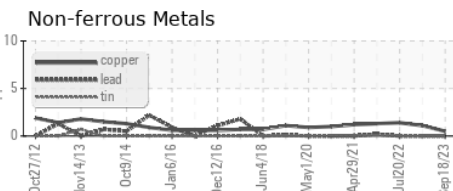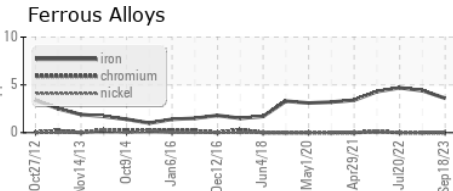

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX05999844 **Received** : 06 Nov 2023
Lab Number : 05999844 **Diagnosed** : 08 Nov 2023
Unique Number : 10728204 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PQ, PrtCount)

NORDEX USA - Chicago
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL
 US 60606
 Contact: DEVIN LINEHAN
 DLinehan@nordex-online.com
 T: (312)386-4124
 F: (312)386-7102

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)