


PROBLEM SUMMARY

Machine Id KAESER ASD 30 5336536 (S/N 1171)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

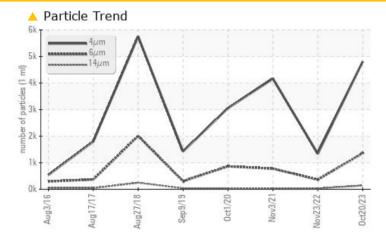

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

ISO

Sample Rating Trend

PROBLEMATIC TEST RESULTS							
Sample Status			ATTENTION	NORMAL	NORMAL		
Particles >6µm	ASTM D7647	>1300	<u> </u>	362	776		
Particles >14µm	ASTM D7647	>80	<u> </u>	31	34		
Particles >21µm	ASTM D7647	>20	<u> </u>	7	6		
Oil Cleanliness	ISO 4406 (c)	>/17/13	 19/18/14	18/16/12	17/12		

Customer Id: OFFPLY Sample No.: KCPA000555 Lab Number: 05999855 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

23 Nov 2022 Diag: Angela Borella



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

03 Nov 2021 Diag: Don Baldridge




Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report







Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.









OIL ANALYSIS REPORT

KAESER ASD 30 5336536 (S/N 1171)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

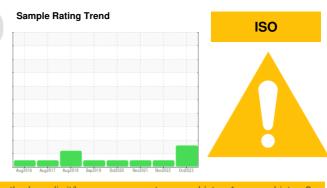


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA000555	KCP52155	KCP39912
Sample Date		Client Info		20 Oct 2023	23 Nov 2022	03 Nov 2021
Machine Age	hrs	Client Info		11593	10504	9013
Oil Age	hrs	Client Info		0	1491	1382
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm		>50	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	5	6	13
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	76	68	86
Calcium	ppm	ASTM D5185m	2	2	<1	1
Phosphorus	ppm	ASTM D5185m		<1	<1	4
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		18035	20901	16060
CONTAMINANTS		method	limit/base			history2
				current	history1	
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		25	20	19
Potassium	ppm	ASTM D5185m	>20	1	<1	4
Water	%	ASTM D6304		0.026	0.036	0.021
ppm Water	ppm	ASTM D6304	>500	262.3	367.0	212.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4809	1335	4160
Particles >6µm		ASTM D7647		<u> </u>	362	776
Particles >14µm		ASTM D7647		<u> </u>	31	34
Particles >21µm		ASTM D7647	>20	<u> </u>	7	6
Particles >38µm		ASTM D7647	>4	1	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/18/14	18/16/12	17/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
1 LOID DEGRUID				ourront		


Report Id: OFFPLY [WUSCAR] 05999855 (Generated: 11/08/2023 13:48:42) Rev: 1


Contact/Location: ? ? - OFFPLY



OIL ANALYSIS REPORT

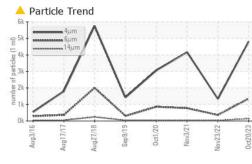


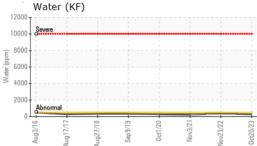

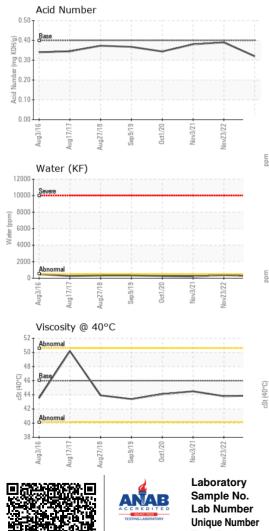

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.9	43.8	44.5
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				•		

Bottom

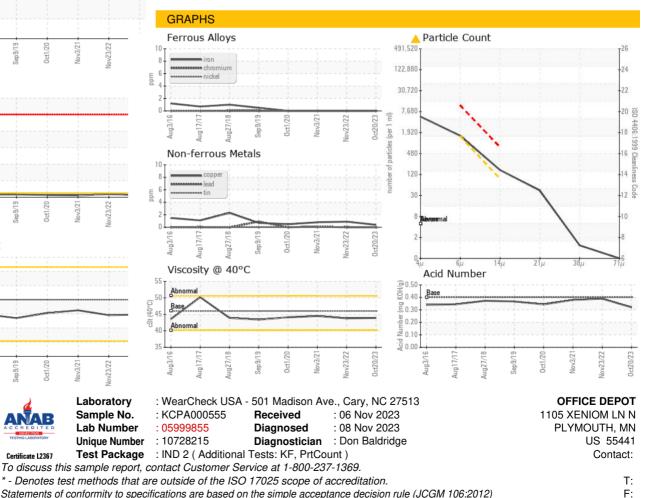

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - OFFPLY

Page 4 of 4