

### **OIL ANALYSIS REPORT**

#### Sample Rating Trend



# KAESER DSD 175 8782284 (S/N 1218)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2023	0ct2023		
SAMPLE INFORM	<b>/IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009472	KCPA001161	
Sample Date		Client Info		27 Oct 2023	09 May 2023	
Machine Age	hrs	Client Info		7320	3661	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	<1	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	<1	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		<1	4	
Tin	ppm		>10	0	0	
Vanadium	ppm	ASTM D5185m	210	0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m		0	10	
Calcium	ppm	ASTM D5185m		0	0	
Phosphorus	ppm	ASTM D5185m	500	5	4	
Zinc	ppm	ASTM D5185m	000	0	9	
Sulfur	ppm	ASTM D5185m		1770	10535	
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	
Sodium	ppm	ASTM D5185m		<1	<1	
Potassium	ppm	ASTM D5185m	>20	0	4	
Water	%	ASTM D6304	>0.05	0.005	0.005	
ppm Water	ppm	ASTM D6304	>500	56.3	50.7	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1524	851	
Particles >6µm		ASTM D7647	>1300	339	251	
Particles >14µm		ASTM D7647	>80	16	21	
Particles >21µm		ASTM D7647	>20	4	4	
Particles >38µm		ASTM D7647	>4	0	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/11	17/15/12	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.42	0.37	



Water (KF)

Viscosity @ 40°C

12000

100

600 Water 400

200

54

52


50


() 00 48 रुतुं 46


44


42 Al 40.

## **OIL ANALYSIS REPORT**

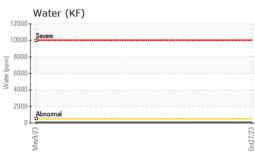


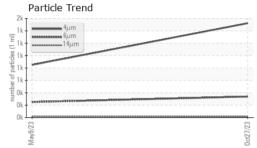

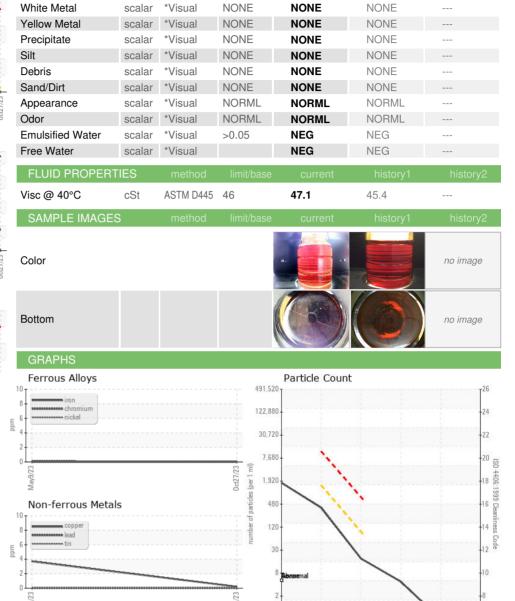







214

Acid Number

\_\_\_\_2.0U

.00

0.00

/Jav/

(mg KOH 1.5

Acid

0ct27/23 -

: 06 Nov 2023

:08 Nov 2023

Diagnostician : Don Baldridge

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Viscosity @ 40°C

55

<del>ن</del> 50

. रहे <sub>45</sub>

40

Abr

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

Diagnosed

### Report Id: GREKNO [WUSCAR] 05999869 (Generated: 11/08/2023 12:38:34) Rev: 1

Contact/Location: RONNIE BURCHFIELD - GREKNO

F: