

PROBLEM SUMMARY

Sample Rating Trend


ISO

Machine Id KAESER SK 26 2031284 (S/N 1274)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

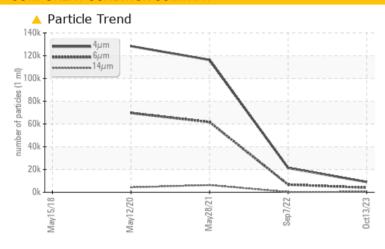

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL				
Particles >6μm	ASTM D7647	>1300	△ 3973	△ 6742	<u>▲</u> 61683				
Particles >14μm	ASTM D7647	>80	4 384	<u> </u>	△ 6337				
Particles >21µm	ASTM D7647	>20	^ 75	<u>^</u> 23	<u></u> 918				
Oil Cleanliness	ISO 4406 (c)	>/17/13	20/19/16	22/20/15	23/20				

Customer Id: CARBALKCP Sample No.: KCPA007171 Lab Number: 05999886 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

07 Sep 2022 Diag: Jonathan Hester

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



28 May 2021 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



12 May 2020 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid.





OIL ANALYSIS REPORT

Sample Rating Trend



KAESER SK 26 2031284 (S/N 1274)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		May2018	May2020	May2021 Sep2022	Oct2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007171	KCP46332	KCP32823
Sample Date		Client Info		13 Oct 2023	07 Sep 2022	28 May 2021
Machine Age	hrs	Client Info		65252	61461	57473
Oil Age	hrs	Client Info		0	3988	3500
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	6	8	8
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	36	16	16
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	<1	1	6
Zinc	ppm	ASTM D5185m	0	45	60	37
Sulfur	ppm	ASTM D5185m	23500	18494	20901	16974
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		18	7	3
Potassium	ppm		>20	<1	0	<1
Water	%	ASTM D6304	>0.05	0.015	0.016	0.011
ppm Water	ppm	ASTM D6304	>500	155.6	165.4	119.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8979	21364	116310
Particles >6µm		ASTM D7647	>1300	<u>▲</u> 3973	<u>▲</u> 6742	<u>▲</u> 61683
Particles >14μm		ASTM D7647	>80	<u>^</u> 384	<u>^</u> 241	△ 6337
Particles >21μm		ASTM D7647	>20	<u>^</u> 75	△ 23	<u></u> 4918
Particles >38μm		ASTM D7647	>4	1	0	<u>^</u> 29
Particles >71μm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/19/16	<u>22/20/15</u>	△ 23/20
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045 1.0

0.42 0.410 Contact/Location: B. WRIGHT - CARBALKCP



OIL ANALYSIS REPORT

