


## **PROBLEM SUMMARY**

# KAESER ASD 30 4831851 (S/N 3158)

Compressor

## KAESER SIGMA (OEM) M-460 (--- GAL)

## COMPONENT CONDITION SUMMARY

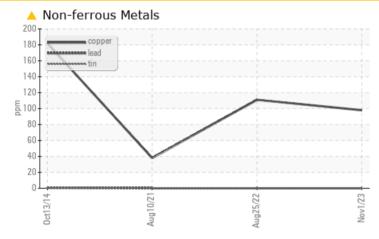

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |     |             |     |                   |          |          |  |
|--------------------------|-----|-------------|-----|-------------------|----------|----------|--|
| Sample Status            |     |             |     | ABNORMAL          | ABNORMAL | ABNORMAL |  |
| Copper                   | ppm | ASTM D5185m | >50 | <mark>/</mark> 98 | 🔺 111    | 38       |  |


Customer Id: ARASTL Sample No.: KCPA007901 Lab Number: 05999891 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

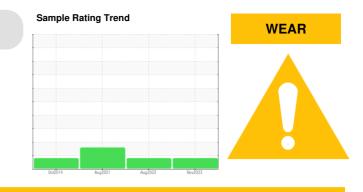

There are no recommended actions for this sample.

## **HISTORICAL DIAGNOSIS**



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. The copper level is abnormal. All other component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.All component wear rates are normal. There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid.



No corrective action is recommended at this time. Resample at the next service interval to monitor. The copper level is abnormal. All other component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.









view report



## **OIL ANALYSIS REPORT**

## Machine Id KAESER ASD 30 4831851 (S/N 3158) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

## DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### A Wear


The copper level is abnormal. All other component wear rates are normal.

## Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

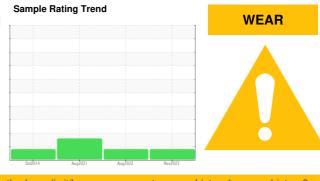



| SAMPLE INFORM    | IATION   | method       | limit/base | current     | history1    | history2    |
|------------------|----------|--------------|------------|-------------|-------------|-------------|
| Sample Number    |          | Client Info  |            | KCPA007901  | KCP48162    | KCP42828    |
| Sample Date      |          | Client Info  |            | 01 Nov 2023 | 25 Aug 2022 | 10 Aug 2021 |
| Machine Age      | hrs      | Client Info  |            | 24418       | 50616       | 17035       |
| Oil Age          | hrs      | Client Info  |            | 0           | 2500        | 6000        |
| Oil Changed      |          | Client Info  |            | N/A         | Changed     | Changed     |
| Sample Status    |          |              |            | ABNORMAL    | ABNORMAL    | ABNORMAL    |
| WEAR METALS      |          | method       | limit/base | current     | history1    | history2    |
| Iron             | ppm      | ASTM D5185m  | >50        | 0           | 0           | <1          |
| Chromium         | ppm      | ASTM D5185m  |            | 0           | 0           | 0           |
| Nickel           | ppm      | ASTM D5185m  | >3         | 0           | 0           | 1           |
| Titanium         | ppm      | ASTM D5185m  |            | 0           | 0           | 0           |
| Silver           | ppm      | ASTM D5185m  | >2         | 0           | <1          | 0           |
| Aluminum         | ppm      | ASTM D5185m  |            | 0           | 0           | 0           |
| Lead             | ppm      | ASTM D5185m  | >10        | 0           | 0           | 0           |
|                  |          | ASTM D5185m  |            | ▲ 98        | ▲ 111       | 38          |
| Copper<br>Tin    | ppm      | ASTM D5185m  | >50<br>>10 | 0           | 0           | <1          |
| Antimony         | ppm      | ASTM D5185m  | >10        |             |             | 0           |
| Vanadium         | ppm      | ASTM D5185m  |            | 0           | 0           | 0           |
|                  | ppm      |              |            |             |             |             |
| Cadmium          | ppm      | ASTM D5185m  |            | 0           | 0           | <1          |
| ADDITIVES        |          | method       | limit/base | current     | history1    | history2    |
| Boron            | ppm      | ASTM D5185m  | 0          | 0           | 0           | 4           |
| Barium           | ppm      | ASTM D5185m  | 90         | 0           | <1          | 0           |
| Molybdenum       | ppm      | ASTM D5185m  | 0          | 0           | 0           | 0           |
| Manganese        | ppm      | ASTM D5185m  |            | 0           | 0           | <1          |
| Magnesium        | ppm      | ASTM D5185m  | 100        | 0           | 0           | 1           |
| Calcium          | ppm      | ASTM D5185m  | 0          | 0           | 0           | 0           |
| Phosphorus       | ppm      | ASTM D5185m  | 0          | <1          | 2           | 9           |
| Zinc             | ppm      | ASTM D5185m  | 0          | 0           | 0           | 11          |
| Sulfur           | ppm      | ASTM D5185m  | 23500      | 14029       | 12914       | 2254        |
| CONTAMINANTS     |          | method       | limit/base | current     | history1    | history2    |
| Silicon          | ppm      | ASTM D5185m  | >25        | 0           | <1          | 0           |
| Sodium           | ppm      | ASTM D5185m  |            | <1          | 0           | 7           |
| Potassium        | ppm      | ASTM D5185m  | >20        | 0           | 0           | <1          |
| Water            | %        | ASTM D6304   | >0.05      | 0.007       | 0.032       | ▲ 0.325     |
| ppm Water        | ppm      | ASTM D6304   | >500       | 75.7        | 322.8       | ▲ 3250.5    |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current     | history1    | history2    |
| Particles >4µm   |          | ASTM D7647   |            | 7376        | 1905        | 13056       |
| Particles >6µm   |          | ASTM D7647   | >1300      | 1257        | 567         | 1141        |
| Particles >14µm  |          | ASTM D7647   | >80        | 75          | 49          | 35          |
| Particles >21µm  |          | ASTM D7647   | >20        | 16          | 11          | 9           |
| Particles >38µm  |          | ASTM D7647   | >4         | 1           | 0           | 1           |
| Particles >71µm  |          | ASTM D7647   |            | 0           | 0           | 0           |
| Oil Cleanliness  |          | ISO 4406 (c) | >/17/13    | 20/17/13    | 18/16/13    | 17/12       |
| FLUID DEGRADA    | TION     | method       | limit/base | current     | history1    | history2    |
| Acid Number (AN) | mg KOH/g |              |            | 0.49        | 0.47        | 0.451       |
|                  |          |              |            | 0 1 1/1 1   |             |             |


Contact/Location: CHARLES HICKS - ARASTL




## **OIL ANALYSIS REPORT**

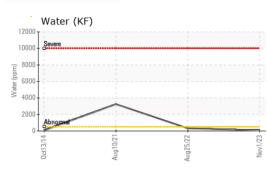

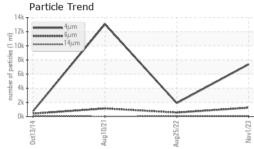


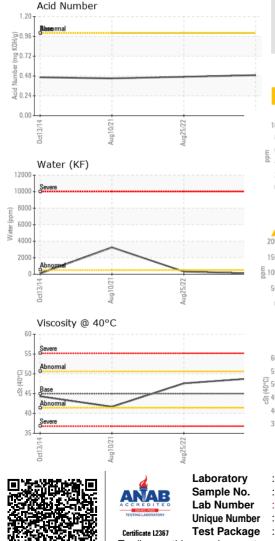

| VISUAL           |        | method    | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual   | NONE       | NONE    | NONE     | LIGHT    |
| Sand/Dirt        | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual   | >0.05      | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual   |            | NEG     | NEG      | NEG      |
| FLUID PROPERT    | IES    | method    | limit/base | current | history1 | history2 |
| Visc @ 40°C      | cSt    | ASTM D445 | 45         | 48.9    | 47.6     | 41.7     |
| SAMPLE IMAGES    | S      | method    | limit/base | current | history1 | history2 |
| Color            |        |           |            | . 6.    |          |          |



Bottom

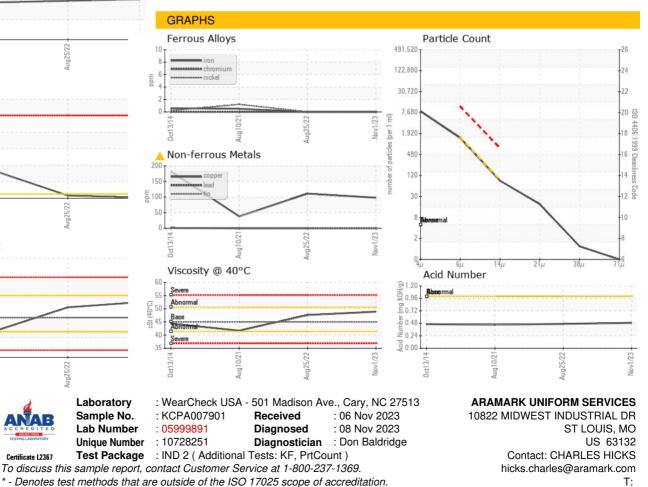

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: CHARLES HICKS - ARASTL

F: