


PROBLEM SUMMARY


Sample Rating Trend

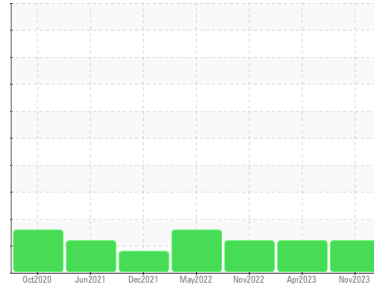

Area
Marcus Hook/Cryogenic/Compressor
Machine Id
CRYOGENIC COMPRESSOR 10-C-102B
Component
Rotary Compressor
Fluid
NOT GIVEN (825 GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

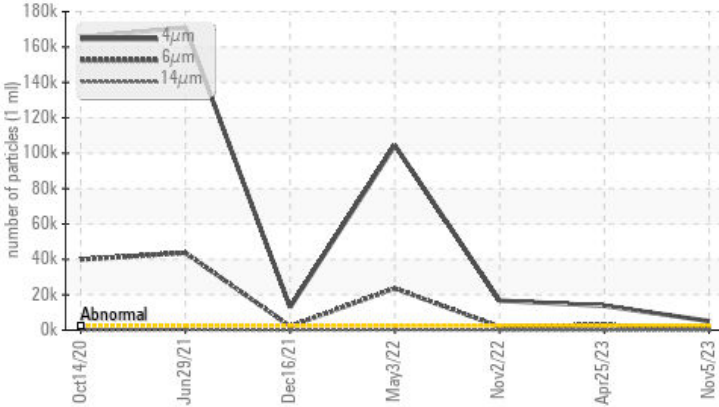

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ABNORMAL | ABNORMAL | ABNORMAL |
|-----------------|--------------|-----------|-------------------|------------|------------|
| Particles >4µm | ASTM D7647 | >2500 | ▲ 5127 | ▲ 13791 | ▲ 16678 |
| Particles >6µm | ASTM D7647 | >320 | ▲ 743 | ▲ 2843 | ▲ 1921 |
| Oil Cleanliness | ISO 4406 (c) | >18/15/13 | ▲ 20/17/13 | ▲ 21/19/12 | ▲ 21/18/12 |

Customer Id: ETCMHOOK
Sample No.: TO60001832
Lab Number: 05999948
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Filter | --- | --- | ? | We recommend you service the filters on this component if applicable. |

HISTORICAL DIAGNOSIS

25 Apr 2023 Diag: Don Baldrige

ISO



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



02 Nov 2022 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



03 May 2022 Diag: Don Baldrige

ISO




We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area
Marcus Hook/Cryogenic/Compressor
 Machine Id
CRYOGENIC COMPRESSOR 10-C-102B
 Component
Rotary Compressor
 Fluid
NOT GIVEN (825 GAL)

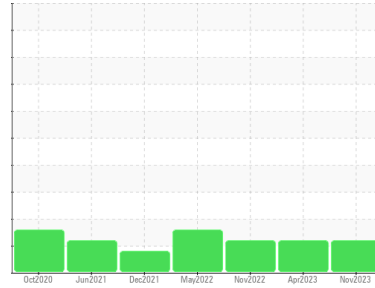

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | TO60001832 | TO90003032 | TO90002761 |
| Sample Date | Client Info | 05 Nov 2023 | 25 Apr 2023 | 02 Nov 2022 |
| Machine Age | hrs | 0 | 0 | 0 |
| Oil Age | hrs | 0 | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | ABNORMAL | ABNORMAL | ABNORMAL |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|----------|------------|-----------------|--------------|----------|----|
| Iron | ppm | ASTM D5185m >70 | 11 | 14 | 12 |
| Chromium | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m >4 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Tin | ppm | ASTM D5185m >3 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|-------------|--------------|----------|----|
| Boron | ppm | ASTM D5185m | 0 | 0 | 1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | <1 | <1 | 0 |
| Calcium | ppm | ASTM D5185m | 13 | 13 | 9 |
| Phosphorus | ppm | ASTM D5185m | 13 | 13 | 31 |
| Zinc | ppm | ASTM D5185m | 2 | 12 | 0 |
| Sulfur | ppm | ASTM D5185m | 0 | 6 | 0 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-----------------|--------------|----------|-------|
| Silicon | ppm | ASTM D5185m >45 | 9 | 9 | 8 |
| Sodium | ppm | ASTM D5185m | <1 | 1 | 1 |
| Potassium | ppm | ASTM D5185m >20 | 0 | <1 | <1 |
| Water | % | ASTM D6304 >0.6 | 0.030 | 0.223 | 0.056 |
| ppm Water | ppm | ASTM D6304 | 307.7 | 2233.4 | 560 |

FLUID CLEANLINESS


| method | limit/base | current | history1 | history2 |
|-----------------|------------------------|-------------------|------------|------------|
| Particles >4µm | ASTM D7647 >2500 | ▲ 5127 | ▲ 13791 | ▲ 16678 |
| Particles >6µm | ASTM D7647 >320 | ▲ 743 | ▲ 2843 | ▲ 1921 |
| Particles >14µm | ASTM D7647 >80 | 42 | 24 | 28 |
| Particles >21µm | ASTM D7647 >20 | 9 | 4 | 5 |
| Particles >38µm | ASTM D7647 >4 | 0 | 1 | 0 |
| Particles >71µm | ASTM D7647 >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >18/15/13 | ▲ 20/17/13 | ▲ 21/19/12 | ▲ 21/18/12 |

FLUID DEGRADATION


| method | limit/base | current | history1 | history2 | |
|------------------|------------|------------|--------------|----------|-------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.037 | 0.044 | 0.112 |

OIL ANALYSIS REPORT


▲ Particle Trend

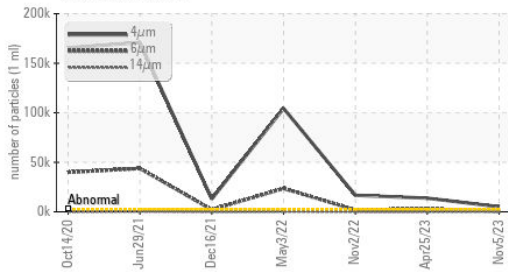


Water (KF)

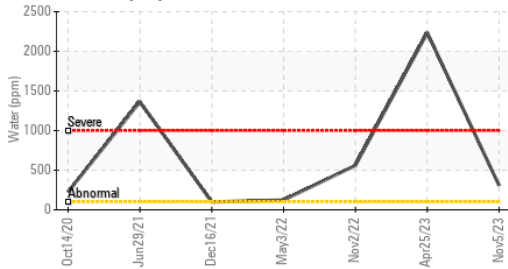


Viscosity @ 100°C

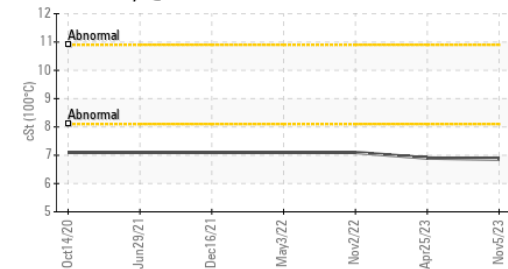

Water (KF)

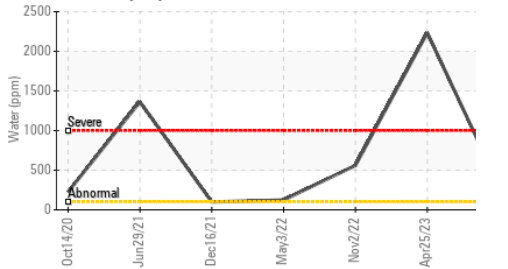

Viscosity @ 40°C

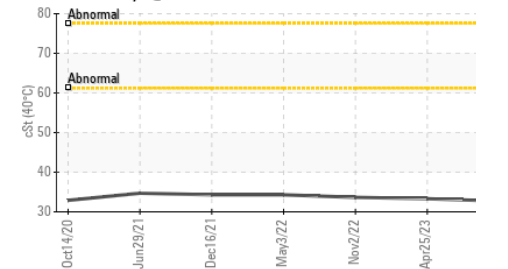


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.6 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|----------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 32.7 | 33.3 | 33.65 |
| Visc @ 100°C | cSt | ASTM D445 | 6.86 | 6.9 | 7.1 |
| Viscosity Index (VI) | Scale | ASTM D2270 | 176 | 173 | 180 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|


Color

Bottom

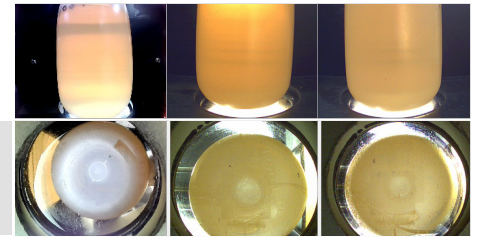


GRAPHS


Ferrous Alloys

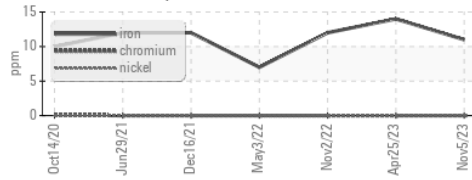


Non-ferrous Metals

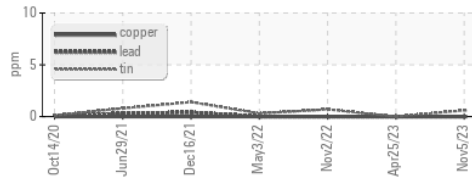


Viscosity @ 40°C

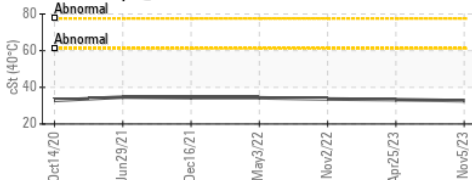

▲ Particle Count

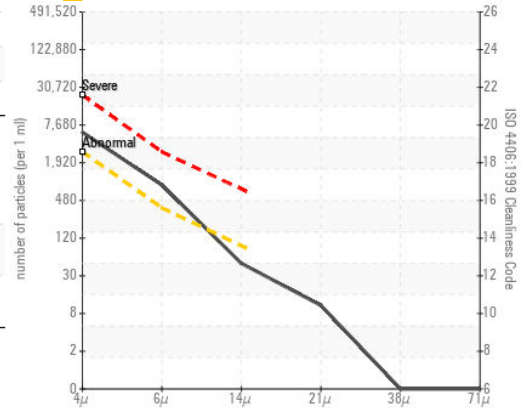

Acid Number

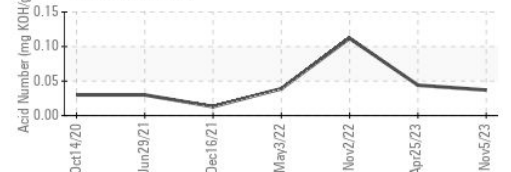

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO60001832 **Received** : 06 Nov 2023
Lab Number : 05999948 **Diagnosed** : 13 Nov 2023
Unique Number : 10728308 **Diagnostician** : Angela Borella
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ENERGY TRANSFER - MARCUS HOOK
 2ND & GREEN STREETS
 MARCUS HOOK, PA
 US 19061
 Contact: CHRISTOPHER HOFFA
 christopher.hoffa@energytransfer.com

T:
F: