


PROBLEM SUMMARY

Marcus Hook/Cryogenic/Compressor Machine Id CRYOGENIC COMPRESSOR 40-C-101D

Rotary Compressor

FRICK COMPRESSOR OIL #12B (550 GAL)

COMPONENT CONDITION SUMMARY

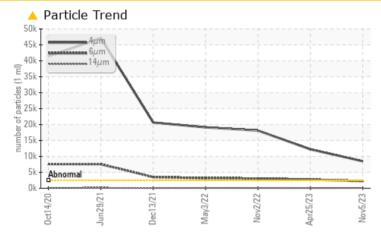

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

		ISO

Sample Rating Trend

PROBLEMATIC TES	T RESULTS			
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647 >250	00 🔺 8492	12213	1 8104
Particles >6µm	ASTM D7647 >320) 🔺 2265	<u> </u>	<u> </u>
Particles >14µm	ASTM D7647 >80	<u> </u>	62	A 84
Oil Cleanliness	ISO 4406 (c) >18/	15/13 🔺 20/18/14	🔺 21/19/13	🔺 21/19/14

Customer Id: ETCMHOOK Sample No.: TO60001829 Lab Number: 05999954 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED AC	TIONS			
Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component if applicable.

HISTORICAL DIAGNOSIS



25 Apr 2023 Diag: Don Baldridge

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

02 Nov 2022 Diag: Don Baldridge



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

03 May 2022 Diag: Don Baldridge

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

Machine Id Machine Id CRYOGENIC COMPRESSOR 40-C-101D

Rotary Compressor

FRICK COMPRESSOR OIL #12B (550 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

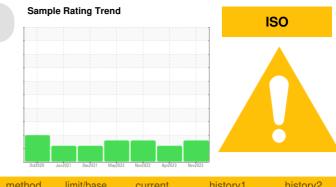


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60001829	TO90003041	TO90002751
Sample Date		Client Info		05 Nov 2023	25 Apr 2023	02 Nov 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>70	0	<1	<1
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	210	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	~3	0	0	0
Lead		ASTM D5185m	>4	0	0	0
Copper	ppm ppm	ASTM D5185m		0	0	0
Tin		ASTM D5185m	>20	ں <1	0	<1
Vanadium	ppm	ASTM D5185m	/0	0	0	0
Cadmium	ppm ppm	ASTM D5185m		0	0	0
ADDITIVES	ppm	method	limit/base	current	history1	history2
			IIIIII/Dase			
Boron	ppm	ASTM D5185m		0	0	1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		2	0	0
Phosphorus	ppm	ASTM D5185m		10	10	31
Zinc	ppm	ASTM D5185m		0	<1	0
Sulfur	ppm	ASTM D5185m		5	0	0
CONTAMINANTS						
		method	limit/base	current	history1	history2
Silicon	ppm	method ASTM D5185m		current 6	history1 7	history2 7
Silicon	ppm	ASTM D5185m		6	7	7
Silicon Sodium	ppm ppm	ASTM D5185m ASTM D5185m	>45 >20	6 <1	7 2	7
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>45 >20	6 <1 0	7 2 <1	7 1 <1
Silicon Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>45 >20	6 <1 0 0.120	7 2 <1 0.063	7 1 <1 0.091
Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>45 >20 >0.6	6 <1 0 0.120 1207.8	7 2 <1 0.063 634.0	7 1 <1 0.091 910
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>45 >20 >0.6 limit/base	6 <1 0 0.120 1207.8 current	7 2 <1 0.063 634.0 history1	7 1 <1 0.091 910 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>45 >20 >0.6 limit/base >2500	6 <1 0 0.120 1207.8 current ▲ 8492	7 2 <1 0.063 634.0 history1 ▲ 12213	7 1 <1 0.091 910 history2 ▲ 18104
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >2500 >320	6 <1 0 0.120 1207.8 current ▲ 8492 ▲ 2265	7 2 <1 0.063 634.0 history1 ▲ 12213 ▲ 2715	7 1 <1 0.091 910 history2 ▲ 18104 ▲ 3059
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >2500 >320 >80	6 <1 0 0.120 1207.8 current ▲ 8492 ▲ 2265 ▲ 107	7 2 <1 0.063 634.0 history1 ▲ 12213 ▲ 2715 62	7 1 <1 0.091 910 history2 ▲ 18104 ▲ 3059 ▲ 84
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >2500 >320 >80 >20 >4	6 <1 0 0.120 1207.8 <urrent ▲ 8492 ▲ 2265 ▲ 107 19</urrent 	7 2 <1 0.063 634.0 history1 ▲ 12213 ▲ 2715 62 10	7 1 <1 0.091 910 history2 ▲ 18104 ▲ 3059 ▲ 84 11
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 MASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >2500 >320 >80 >20 >4	6 <1 0 0.120 1207.8 current ▲ 8492 ▲ 2265 ▲ 107 19 0	7 2 <1 0.063 634.0 history1 ▲ 12213 ▲ 2715 62 10 0	7 1 <1 0.091 910 history2 ▲ 18104 ▲ 3059 ▲ 84 11 0
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >38µm Particles >71µm	ppm ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >2500 >320 >80 >20 >4 >3	6 <1 0 0.120 1207.8 Current ▲ 8492 ▲ 2265 ▲ 107 19 0 0 0	7 2 <1 0.063 634.0 history1 ▲ 12213 ▲ 2715 62 10 0 0 0	7 1 <1 0.091 910 history2 ▲ 18104 ▲ 3059 ▲ 84 11 0 0 0




OIL ANALYSIS REPORT

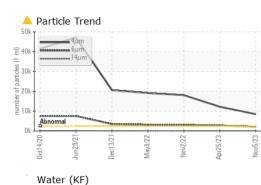






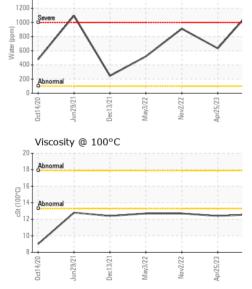

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.6	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
			in the base			
Visc @ 40°C	cSt	ASTM D445		75.5	75.1	79.0
Visc @ 100°C	cSt	ASTM D445		12.6	12.4	12.7
Viscosity Index (VI)	Scale	ASTM D2270		166	163	160
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				40 - 2 - 10		TUCH

Bottom

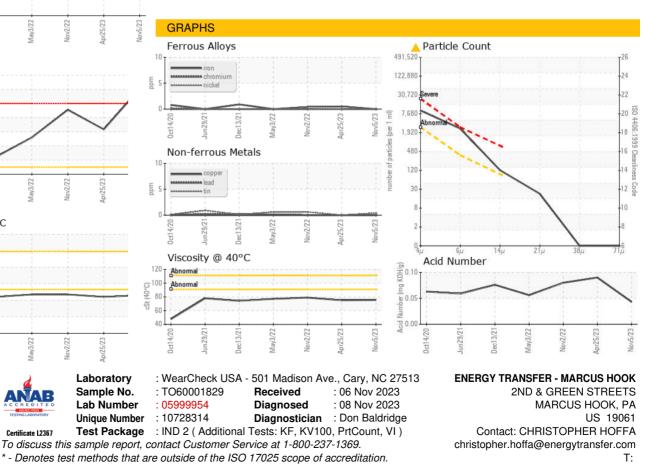

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Submitted By: ERIC THORNTON

F: