




# PROBLEM SUMMARY

Sample Rating Trend

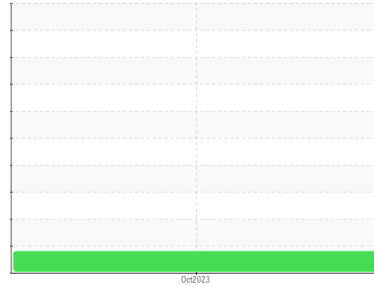

**WEAR**



Machine Id

**015-0072**

Component


**Left Swing Drive**

Fluid

**SCHAEFFER SCHAEFFER 293 MOLY 75W90 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Ferrous Alloys

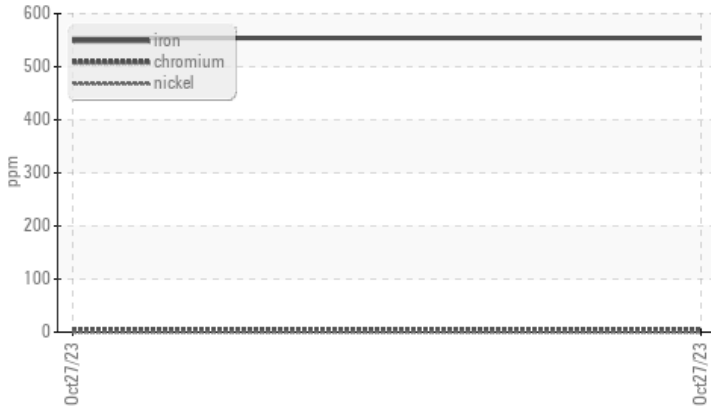

## RECOMMENDATION

No corrective action is recommended at this time.  
Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| Sample Status | ABNORMAL |             | ---  | ---   |     |     |
|---------------|----------|-------------|------|-------|-----|-----|
| Iron          | ppm      | ASTM D5185m | >400 | ▲ 554 | --- | --- |

Customer Id: AECCHATN  
 Sample No.: WC0868266  
 Lab Number: 06000146  
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:

Sean Felton +1 919-379-4092

[sfelton@wearcheckusa.com](mailto:sfelton@wearcheckusa.com)

To change component or sample information:

Customer Service +1 1-800-237-1369

[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend


**WEAR**



Machine Id  
**015-0072**

Component  
**Left Swing Drive**

Fluid  
**SCHAEFFER SCHAEFFER 293 MOLY 75W90 (--- GAL)**

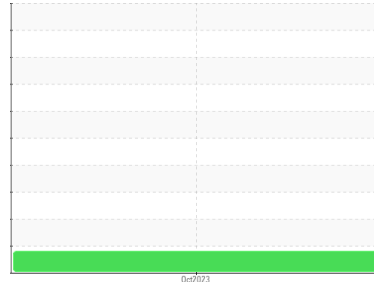

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

Gear wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1 | history2 |
|---------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | <b>WC0868266</b>   | ---      | ---      |
| Sample Date   | Client Info | <b>27 Oct 2023</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info        | <b>0</b> | ---      |
| Oil Age       | hrs         | Client Info        | <b>0</b> | ---      |
| Oil Changed   | Client Info | <b>Not Changed</b> | ---      | ---      |
| Sample Status |             | <b>ABNORMAL</b>    | ---      | ---      |

## WEAR METALS

| method       | limit/base       | current      | history1 | history2 |
|--------------|------------------|--------------|----------|----------|
| Iron ppm     | ASTM D5185m >400 | <b>▲ 554</b> | ---      | ---      |
| Chromium ppm | ASTM D5185m >10  | <b>5</b>     | ---      | ---      |
| Nickel ppm   | ASTM D5185m >10  | <b>&lt;1</b> | ---      | ---      |
| Titanium ppm | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Silver ppm   | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Aluminum ppm | ASTM D5185m >25  | <b>0</b>     | ---      | ---      |
| Lead ppm     | ASTM D5185m >50  | <b>0</b>     | ---      | ---      |
| Copper ppm   | ASTM D5185m >200 | <b>&lt;1</b> | ---      | ---      |
| Tin ppm      | ASTM D5185m >10  | <b>0</b>     | ---      | ---      |
| Vanadium ppm | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Cadmium ppm  | ASTM D5185m      | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method         | limit/base  | current     | history1 | history2 |
|----------------|-------------|-------------|----------|----------|
| Boron ppm      | ASTM D5185m | <b>16</b>   | ---      | ---      |
| Barium ppm     | ASTM D5185m | <b>0</b>    | ---      | ---      |
| Molybdenum ppm | ASTM D5185m | <b>4</b>    | ---      | ---      |
| Manganese ppm  | ASTM D5185m | <b>5</b>    | ---      | ---      |
| Magnesium ppm  | ASTM D5185m | <b>0</b>    | ---      | ---      |
| Calcium ppm    | ASTM D5185m | <b>13</b>   | ---      | ---      |
| Phosphorus ppm | ASTM D5185m | <b>375</b>  | ---      | ---      |
| Zinc ppm       | ASTM D5185m | <b>12</b>   | ---      | ---      |
| Sulfur ppm     | ASTM D5185m | <b>5901</b> | ---      | ---      |

## CONTAMINANTS

| method        | limit/base      | current   | history1 | history2 |
|---------------|-----------------|-----------|----------|----------|
| Silicon ppm   | ASTM D5185m >50 | <b>4</b>  | ---      | ---      |
| Sodium ppm    | ASTM D5185m     | <b>4</b>  | ---      | ---      |
| Potassium ppm | ASTM D5185m >20 | <b>18</b> | ---      | ---      |

## VISUAL

| method                  | limit/base    | current      | history1 | history2 |
|-------------------------|---------------|--------------|----------|----------|
| White Metal scalar      | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Yellow Metal scalar     | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Precipitate scalar      | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Silt scalar             | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Debris scalar           | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Sand/Dirt scalar        | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Appearance scalar       | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Odor scalar             | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Emulsified Water scalar | *Visual >0.2  | <b>NEG</b>   | ---      | ---      |
| Free Water scalar       | *Visual       | <b>NEG</b>   | ---      | ---      |


## FLUID PROPERTIES

| method          | limit/base | current    | history1 | history2 |
|-----------------|------------|------------|----------|----------|
| Visc @ 40°C cSt | ASTM D445  | <b>167</b> | ---      | ---      |



# OIL ANALYSIS REPORT


### ▲ Ferrous Alloys

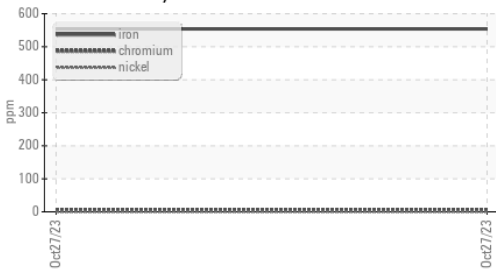


| SAMPLE IMAGES | method | limit/base | current  | history1 | history2 |
|---------------|--------|------------|----------|----------|----------|
| Color         |        |            | no image | no image | no image |
| Bottom        |        |            | no image | no image | no image |

### GRAPHS


### ▲ Ferrous Alloys

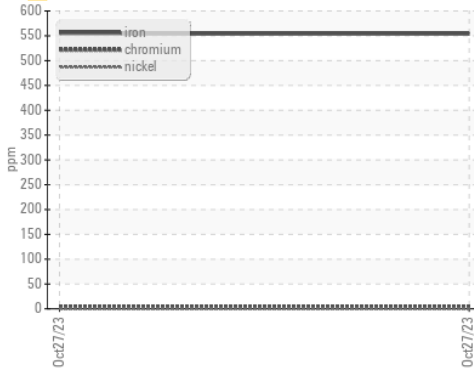


### Non-ferrous Metals

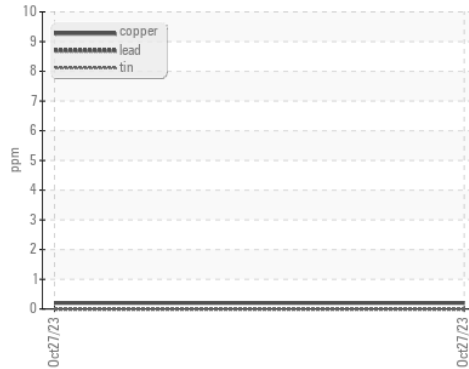

### Viscosity @ 40°C

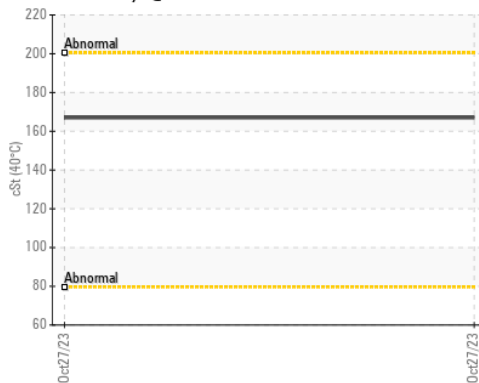

### Viscosity @ 40°C

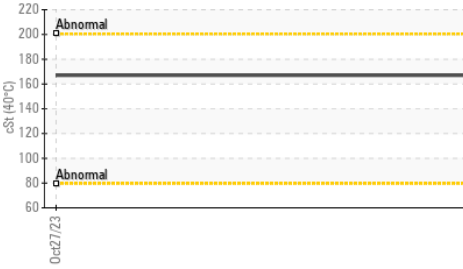

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0868266      **Received** : 06 Nov 2023  
**Lab Number** : 06000146      **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10728506      **Diagnostician** : Sean Felton  
**Test Package** : CONST

**SHIMMICK CONSTRUCTION**  
 5535 TRAILHEAD DRIVE  
 CHATTANOOGA, TN  
 US 37415  
 Contact: DANIEL LISELLA  
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: