




OIL ANALYSIS REPORT

Sample Rating Trend

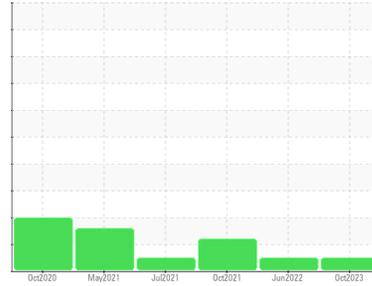

NORMAL



Area
OKLAHOMA/102/EG - OTHER SERVICE
 Machine Id
54.25L [OKLAHOMA^102^EG - OTHER SERVICE]

Component
Hydraulic System
 Fluid
MOBIL MOBILFLUID 424 (40 GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0857409	WC0702163	WC0627742
Sample Date	Client Info	24 Oct 2023	14 Jun 2022	29 Oct 2021
Machine Age	hrs	2272	1363	904
Oil Age	hrs	704	500	904
Oil Changed	Client Info	N/A	Not Changd	Changed
Sample Status		NORMAL	NORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	1	3	7
Chromium	ppm	ASTM D5185m >10	0	0	<1
Nickel	ppm	ASTM D5185m >10	<1	0	0
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m	0	<1	1
Aluminum	ppm	ASTM D5185m >10	<1	<1	<1
Lead	ppm	ASTM D5185m >10	2	<1	1
Copper	ppm	ASTM D5185m >75	5	4	10
Tin	ppm	ASTM D5185m >10	0	<1	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	106	121	115
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	17	13	15
Calcium	ppm	ASTM D5185m	3499	3217	3690
Phosphorus	ppm	ASTM D5185m	1153	973	1138
Zinc	ppm	ASTM D5185m	1471	1264	1358
Sulfur	ppm	ASTM D5185m	4333	3429	3033

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	7	10	15
Sodium	ppm	ASTM D5185m	7	6	0
Potassium	ppm	ASTM D5185m >20	<1	0	2

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	1206	6752	159800
Particles >6µm	ASTM D7647 >2500	286	1350	▲ 34754
Particles >14µm	ASTM D7647 >640	17	70	▲ 1122
Particles >21µm	ASTM D7647 >160	4	11	▲ 225
Particles >38µm	ASTM D7647 >40	0	1	5
Particles >71µm	ASTM D7647 >10	0	0	0
Oil Cleanliness	ISO 4406 (c) >--/18/16	17/15/11	20/18/13	▲ 24/22/17

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.96	0.79	0.888



OIL ANALYSIS REPORT

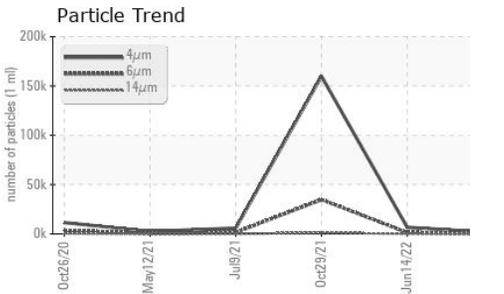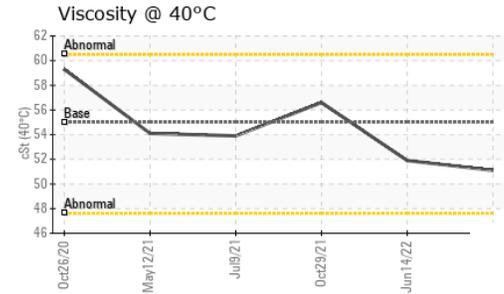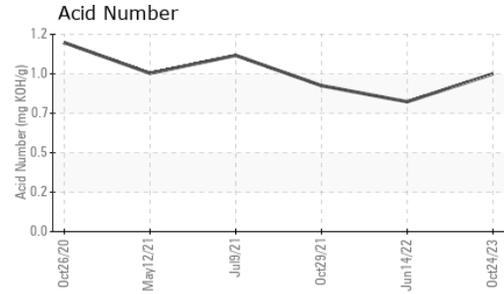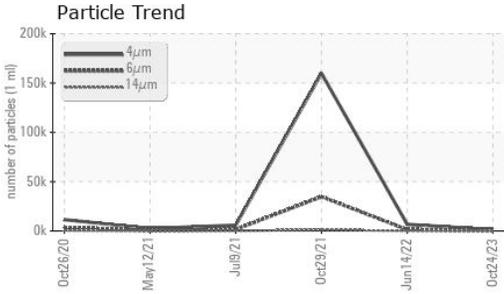






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 55	51.1	51.9	56.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



GRAPHS

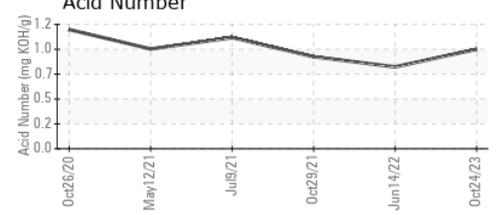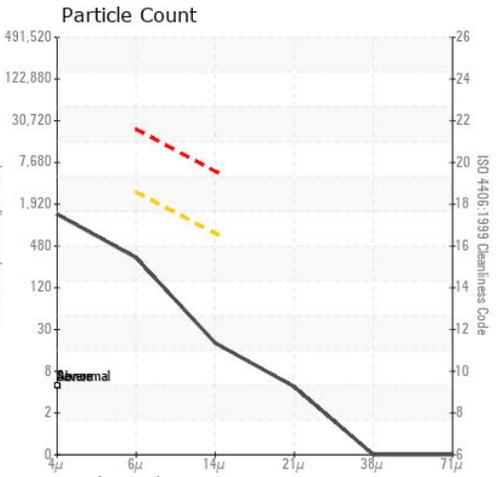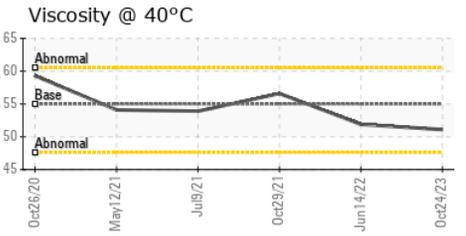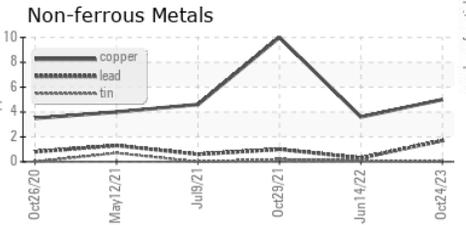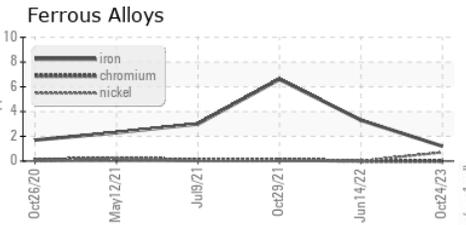

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0857409 **Received** : 07 Nov 2023
Lab Number : 06000442 **Diagnosed** : 08 Nov 2023
Unique Number : 10728802 **Diagnostician** : Wes Davis
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)