

## **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL



# NOT GIVEN PTK0004764

Component

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Sep2023		
SAMPLE INFORM	/ATION	method	limit/base	current	history1	history2
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Client Info	mmbacco	PTK0004764		
Sample Number		Client Info		18 Sep 2023		
Sample Date Machine Age	hrs	Client Info		0 Sep 2023		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status		Oliciti IIIIo		NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m	>10	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	1		
Copper	ppm	ASTM D5185m	>75	5		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m	710	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES	1-1-	mathad	limit/booo	ourrent.	historyt	hiotom/2
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	25	14		
Calcium	ppm	ASTM D5185m	200	60		
Phosphorus	ppm	ASTM D5185m	300	264		
Zinc	ppm	ASTM D5185m	370	318		
Sulfur	ppm	ASTM D5185m	2500	1568		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m		<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		5657		
Particles >6µm		ASTM D7647		1655		
Particles >14µm		ASTM D7647	>320	162		
Particles >21µm		ASTM D7647		50		
Particles >38µm		ASTM D7647	>20	3		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>/18/15	20/18/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	L/OLL:					

Acid Number (AN) mg KOH/g ASTM D8045 0.57

0.28



## **OIL ANALYSIS REPORT**

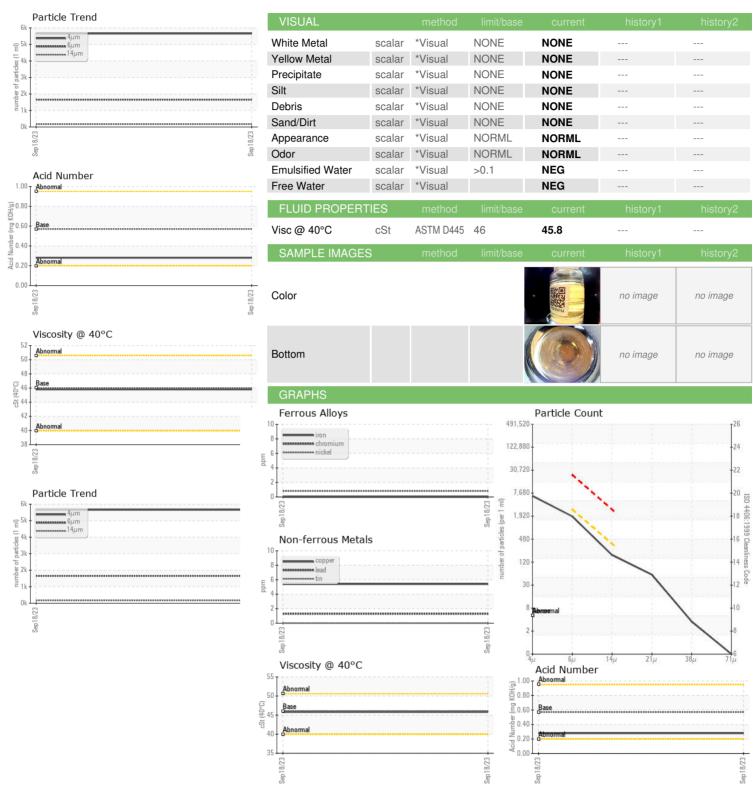



Certificate L2367

Laboratory Sample No. Lab Number Unique Number Test Package : MOB 2

: 06000472 : 10728832

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PTK0004764 Received : 07 Nov 2023 : 08 Nov 2023 Diagnosed : Wes Davis

Diagnostician

HUMBLE, TX US 77396 Contact: SOFIA GHRAYEB sghrayeb@prattindustries.com T:

**PRATT RECYCLING** 

14424 SMITH RD

F: (901)271-7183

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SOFIA GHRAYEB - PRAHUMTX