

## **PROBLEM SUMMARY**

Sample Rating Trend

ISO

Machine Id


# KAESER SK 20T 6773501 (S/N 1142)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

## COMPONENT CONDITION SUMMARY

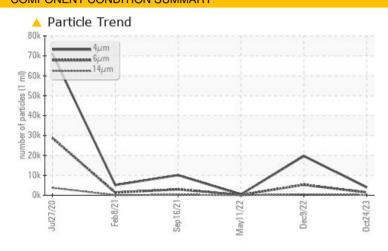

### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ATTENTION	ABNORMAL	NORMAL				
Particles >6µm	ASTM D7647	>1300	<b>1382</b>	<u>▲</u> 5267	127				
Particles >14µm	ASTM D7647	>80	<b>147</b>	<u></u> 510	16				
Particles >21µm	ASTM D7647	>20	<b>△</b> 38	<u> </u>	5				
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>19/18/14</b>	<b>2</b> 1/20/16	16/14/11				

Customer Id: COUSAL Sample No.: KC124357 Lab Number: 06000513 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 09 Dec 2022 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 11 May 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 16 Sep 2021 Diag: Don Baldridge

ISO




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service





## **OIL ANALYSIS REPORT**

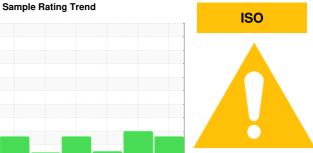

## KAESER SK 20T 6773501 (S/N 1142)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### **DIAGNOSIS**

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jul2020	Feb2021 Sep2021	May2022 Dec2022	0et2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC124357	KC107991	KC91825
Sample Date		Client Info		24 Oct 2023	09 Dec 2022	11 May 2022
Machine Age	hrs	Client Info		15633	12506	10712
Oil Age	hrs	Client Info		0	1800	6000
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ATTENTION	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	16	7	11
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	3
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	0	17	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		2	<1	2
Zinc	ppm	ASTM D5185m		0	38	45
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		4	12	5
Potassium	ppm	ASTM D5185m	>20	5	8	14
Water	%	ASTM D6304	>0.05	0.009	0.007	0.015
ppm Water	ppm	ASTM D6304	>500	94.2	77.2	156.1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3970	19716	413
Particles >6µm		ASTM D7647	>1300	<b>1382</b>	<u>▲</u> 5267	127
Particles >14µm		ASTM D7647	>80	<u> </u>	<u></u> 510	16
Particles >21µm		ASTM D7647	>20	<b>4</b> 38	<u>▲</u> 147	5
Particles >38µm		ASTM D7647	>4	2	<u> </u>	0
Particles >71µm		ASTM D7647	>3	0	1	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	<b>△</b> 21/20/16	16/14/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.27	0.30	0.26



### OIL ANALYSIS REPORT





Certificate L2367

Sample No. Lab Number **Unique Number** Test Package

: KC124357 : 06000513 : 10728873

Received Diagnosed

: 07 Nov 2023 : 09 Nov 2023 Diagnostician : Jonathan Hester

1375 WEST STATE STREET, P.O. BOX 887

SALEM, OH US 44460

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: IND 2

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: