

PROBLEM SUMMARY

Sample Rating Trend


ISO

KAESER AIRCENTER SK 20 5949562 (S/N 2015)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

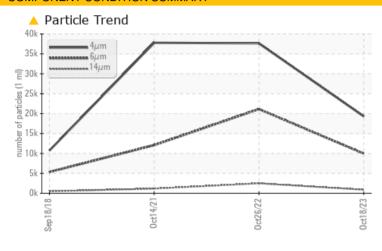

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL				
Particles >6µm	ASTM D7647 >	>1300	<u> </u>	<u>^</u> 21134	▲ 12079				
Particles >14μm	ASTM D7647 >	>80	A 885	<u>4</u> 2490	<u> </u>				
Particles >21µm	ASTM D7647 >	>20	<u> </u>	<u>\$\times\$</u> 283	<u>^</u> 231				
Oil Cleanliness	ISO 4406 (c) >	>/17/13	<u>21/20/17</u>	<u>22/22/18</u>	<u>^</u> 21/17				

Customer Id: GROSCH Sample No.: KC126040 Lab Number: 06000531 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 ihester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

26 Oct 2022 Diag: Don Baldridge

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



14 Oct 2021 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



18 Sep 2018 Diag: Jonathan Hester

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT



ISO

KAESER AIRCENTER SK 20 5949562 (S/N 2015)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Sep 201	8 Oct2021	0ct2022	Dct2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC126040	KC99033	KC98940
Sample Date		Client Info		18 Oct 2023	26 Oct 2022	14 Oct 2021
Machine Age	hrs	Client Info		12596	10494	8119
Oil Age	hrs	Client Info		0	2375	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	0
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	27	32	29
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	83	81	74
Calcium	ppm	ASTM D5185m	2	3	2	0
Phosphorus	ppm	ASTM D5185m		2	5	0
Zinc	ppm	ASTM D5185m		0	<1	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		13	11	8
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water	%	ASTM D6304	>0.05	0.023	0.020	0.035
ppm Water	ppm	ASTM D6304	>500	231.2	205.9	353.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		19303	37623	37783
Particles >6µm		ASTM D7647	>1300	9963	<u>^</u> 21134	<u>▲</u> 12079
Particles >14μm		ASTM D7647	>80	885	2 490	<u></u> 1168
Particles >21µm		ASTM D7647	>20	<u> </u>	△ 283	<u>^</u> 231
Particles >38µm		ASTM D7647	>4	1	<u> </u>	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	<u>22/22/18</u>	<u>▲</u> 21/17
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.38	0.33	0.429



OIL ANALYSIS REPORT

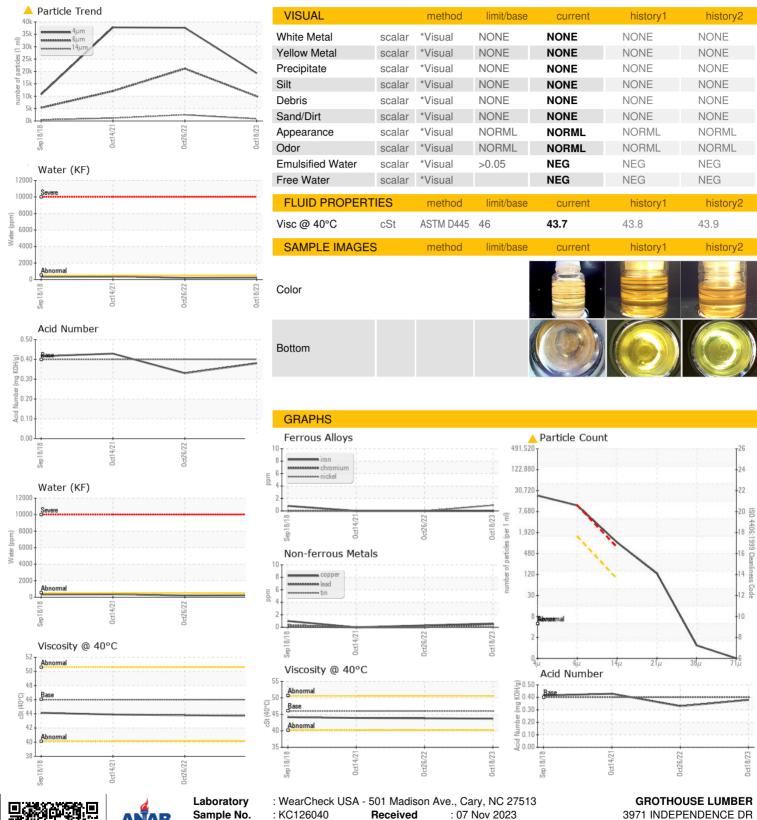





Report Id: GROSCH [WUSCAR] 06000531 (Generated: 11/09/2023 10:24:55) Rev: 1

Sample No. Lab Number **Unique Number**

: KC126040 : 06000531 : 10728891

: 07 Nov 2023 Received Diagnosed

: 09 Nov 2023 Diagnostician : Jonathan Hester

Test Package : IND 2 Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - GROSCH

US 18078

T: F:

SCHNECKSVILLE, PA

Contact: Service Manager