


PROBLEM SUMMARY

KAESER SM 15 8713816 (S/N 1397)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

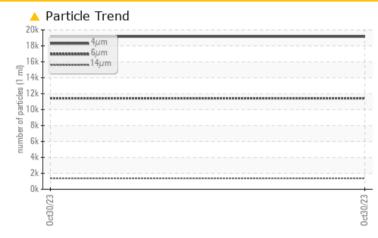

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

THOBEEM, THO T	LOTTILOOLIO			
Sample Status			ABNORMAL	
Particles >6µm	ASTM D7647	>1300	<u> </u>	
Particles >14µm	ASTM D7647	>80	🔺 1375	
Particles >21µm	ASTM D7647	>20	<u> </u>	
Particles >38µm	ASTM D7647	>4	<u> </u>	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	


Customer Id: LAFWHIKC Sample No.: KC110514 Lab Number: 06000533 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

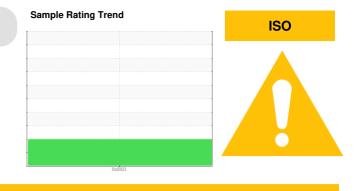

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

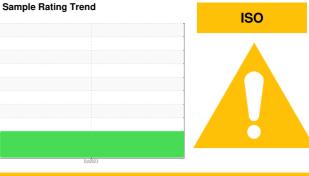


SAMPLE INFORM	/IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC110514		
Sample Date		Client Info		30 Oct 2023		
Machine Age	hrs	Client Info		2957		
Oil Age	hrs	Client Info		2957		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	10		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	3		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		2		
Zinc	ppm	ASTM D5185m		0		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	0.010		
ppm Water	ppm	ASTM D6304	>500	100.7		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		19163		
Particles >6µm		ASTM D7647	>1300	🔺 11421		
Particles >14 μ m		ASTM D7647	>80	A 1375		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	6		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 21/21/18		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.31		



OIL ANALYSIS REPORT





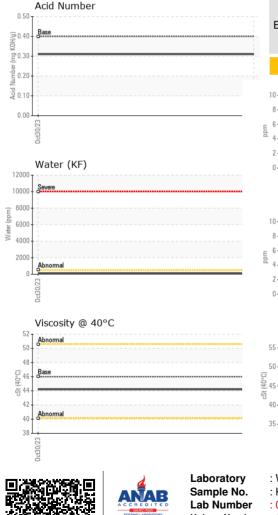

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	FIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.2		
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				a.	no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			491,520	Particle Count		т26
8 - iron			451,520	1		720
6 - nickel			122,880	-		-24
4			30,720			-22
2						
			7,680 SI Ê			-20 ह
0ct30/23			0ct30/23 (per 1 ml)			-18
			o icles (i			
Non-ferrous Meta	15		ited to			-18 - -18 - -16 - -14 - -14 - -14 - -14 - -12 -
8 - copper			120,12 million (1997)	1	1 /	-14
6 tin			2 30	-		12
4-						
2				Berevernal		10
			0/23	-		
0ct30/23			0ct30/23			6
Viscosity @ 40°C				4μ 6μ Acid Number	14μ 21μ	38µ 71µ
5 Abnormal			S ^{0.50}			
0 - P			5 0.40 B	- Base	*****	****
5 - Base			Ē 0.30	1		
0 - Abnormal		*****	(B) 150 (B) HO 20 (B) HO 20 (B) 0.30 (B) 0.30 (B) 0.30 (C) 10 (C)	1		
5			, 0.00			
23			23	23		23

0ct30/23 -0ct30/23 0ct30/23 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 LAFARGE Received : 07 Nov 2023 5160 MAIN ST : KC110514 : 09 Nov 2023 WHITEHALL, PA : 06000533 Diagnosed Unique Number : 10728893 Diagnostician : Jonathan Hester US 18052 Test Package : IND 2 Contact: SERVICE MANAGER Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)