




# OIL ANALYSIS REPORT

Sample Rating Trend

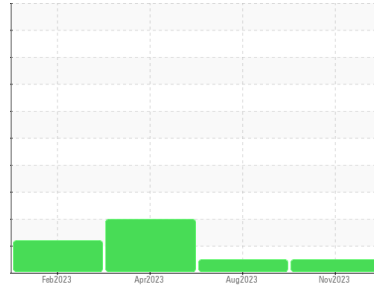

**NORMAL**



Machine Id  
**SLICING HALL 3 (S/N U131500020)**

Component  
**Pump**  
Fluid  
**USPI VAC 100 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USPM31181</b>	USPM29103	USPM24337
Sample Date	Client Info	<b>06 Nov 2023</b>	01 Aug 2023	02 Apr 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>0</b>	<1	1
Chromium	ppm ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >3	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >7	<b>&lt;1</b>	0	0
Lead	ppm ASTM D5185m >12	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >30	<b>&lt;1</b>	0	0
Tin	ppm ASTM D5185m >9	<b>0</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 0	<b>0</b>	0	0
Manganese	ppm ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm ASTM D5185m 0	<b>0</b>	0	<1
Calcium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Phosphorus	ppm ASTM D5185m 1800	<b>463</b>	485	5
Zinc	ppm ASTM D5185m 0	<b>0</b>	0	0
Sulfur	ppm ASTM D5185m 0	<b>37</b>	0	25

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >60	<b>4</b>	4	2
Sodium	ppm ASTM D5185m	<b>1</b>	0	<1
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	0
Water	% ASTM D6304 >.1	<b>0.037</b>	0.032	0.027
ppm Water	ppm ASTM D6304 >1000	<b>379.5</b>	329.9	271.4

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>218</b>	203	▲ 14695
Particles >6µm	ASTM D7647 >1300	<b>99</b>	70	▲ 3642
Particles >14µm	ASTM D7647 >160	<b>24</b>	15	▲ 257
Particles >21µm	ASTM D7647 >40	<b>12</b>	8	▲ 70
Particles >38µm	ASTM D7647 >10	<b>5</b>	4	3
Particles >71µm	ASTM D7647 >3	<b>1</b>	1	1
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>15/14/12</b>	15/13/11	▲ 21/19/15

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.05	<b>0.10</b>	0.05	0.09




# OIL ANALYSIS REPORT

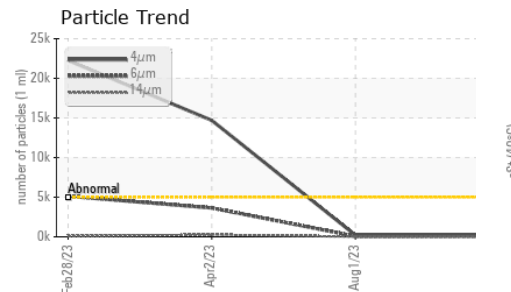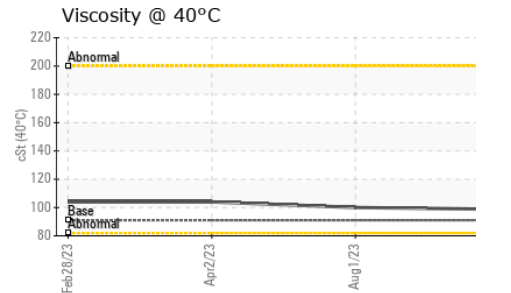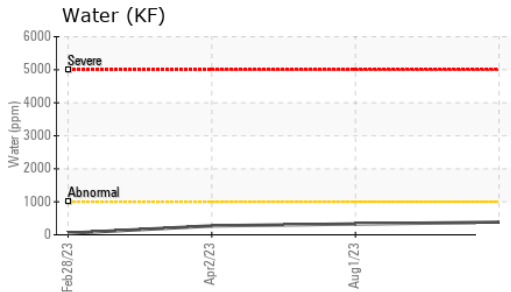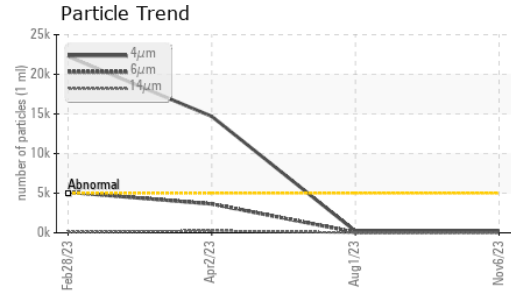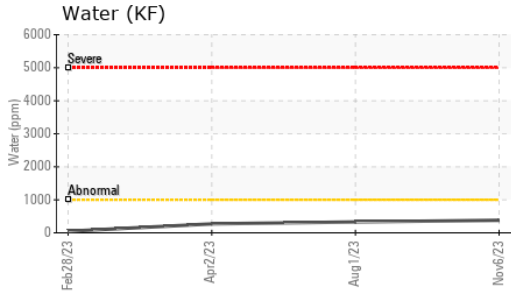






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 91	98.7	100	104

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

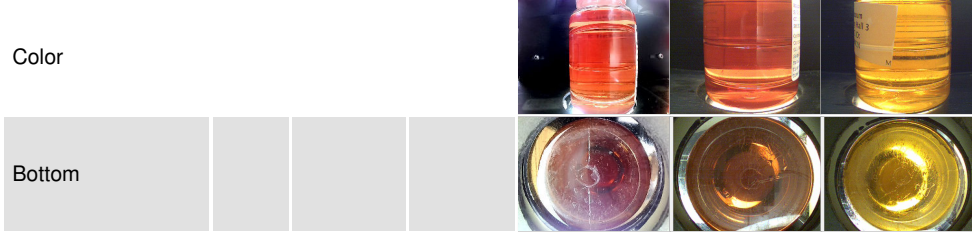

## GRAPHS

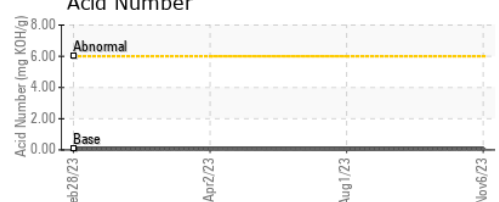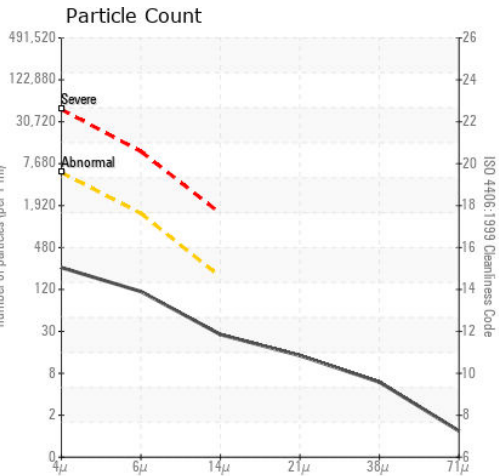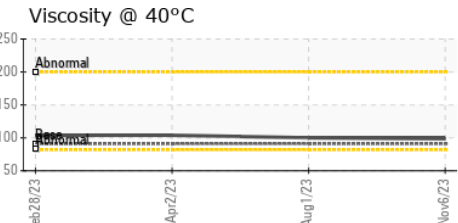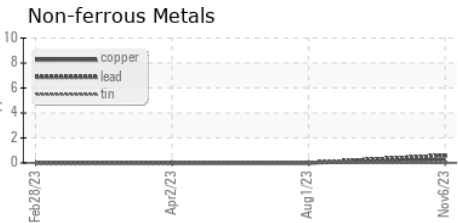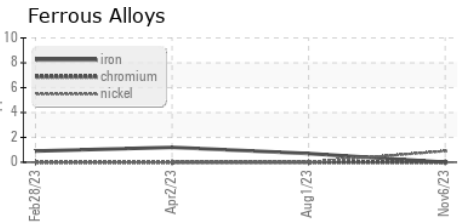

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USPM31181 **Received** : 07 Nov 2023  
**Lab Number** : 06000573 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10728933 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**SMITHFIELD FOODS - KINSTON**  
 KINSTON, NC  
 US  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: