




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/EG - TRUCK-OFF-HWY-HEAVY HAUL
 Machine Id
69.80L [OKLAHOMA^102^EG - TRUCK-OFF-HWY-HEAVY HAUL]
 Component
Transmission (Manual)
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

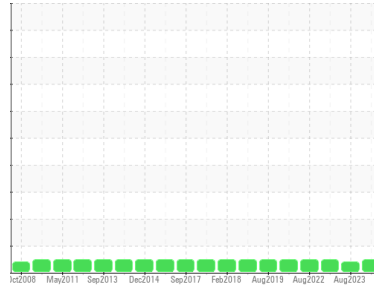

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0857253	WC0808078	WC0821893
Sample Date	Client Info		27 Oct 2023	02 Aug 2023	18 Jul 2023
Machine Age	hrs	Client Info	14020	13660	13622
Oil Age	hrs	Client Info	1060	11142	300
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			NORMAL	ATTENTION	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	10	3	9
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	0	0	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >7	0	0	<1
Aluminum	ppm	ASTM D5185m >25	2	4	2
Lead	ppm	ASTM D5185m >45	<1	1	0
Copper	ppm	ASTM D5185m >225	8	<1	5
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	34	115	36
Barium	ppm	ASTM D5185m	5	0	0
Molybdenum	ppm	ASTM D5185m	<1	0	2
Manganese	ppm	ASTM D5185m	0	<1	0
Magnesium	ppm	ASTM D5185m	20	22	23
Calcium	ppm	ASTM D5185m	2860	3387	3226
Phosphorus	ppm	ASTM D5185m	1010	1071	1062
Zinc	ppm	ASTM D5185m	1242	1336	1325
Sulfur	ppm	ASTM D5185m	4997	5814	5930

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	6	10	6
Sodium	ppm	ASTM D5185m	2	8	<1
Potassium	ppm	ASTM D5185m >20	1	1	0

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 57.6	102	▲ 53.9	102






OIL ANALYSIS REPORT

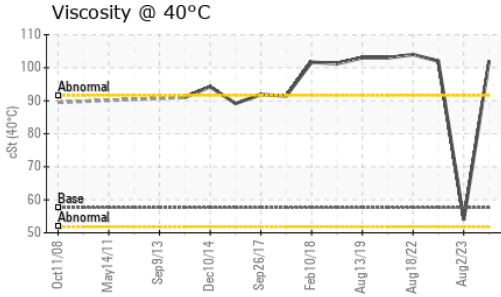

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

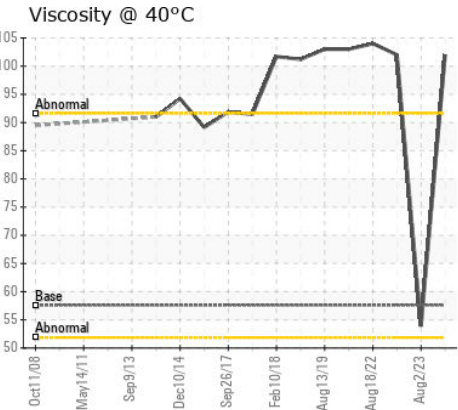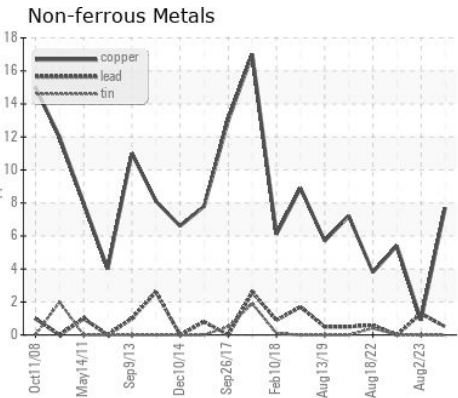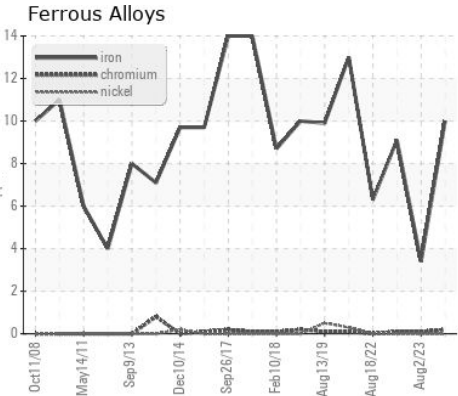

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0857253
Lab Number : 06000842
Unique Number : 10729202
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)