




# PROBLEM SUMMARY

Sample Rating Trend

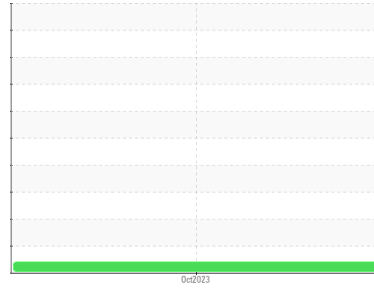


VISCOSITY



Machine Id  
**INTERANTIONAL 441459**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (18 QTS)**

## COMPONENT CONDITION SUMMARY

### ▲ Viscosity @ 100°C

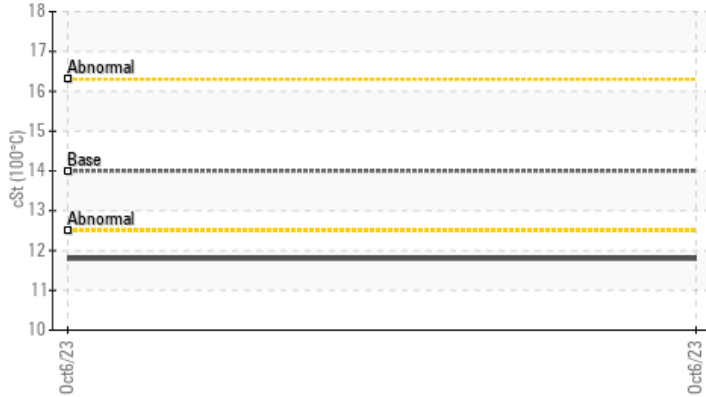

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: Hours 431 )

## PROBLEMATIC TEST RESULTS

| Sample Status |     |           |    | ATTENTION | --- | --- |
|---------------|-----|-----------|----|-----------|-----|-----|
| Visc @ 100°C  | cSt | ASTM D445 | 14 | ▲ 11.8    | --- | --- |

Customer Id: RUSCHA  
 Sample No.: IL0030487  
 Lab Number: 06000912  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


| Action        | Status | Date | Done By | Description   |
|---------------|--------|------|---------|---|
| Change Fluid  | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Change Filter | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

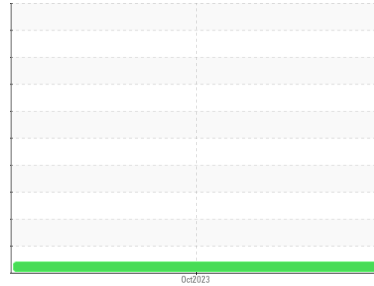

VISCOSITY



Machine Id  
**INTERANTIONAL 441459**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (18 QTS)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: Hours 431 )

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>IL0030487</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>06 Oct 2023</b> | ---      | ---      |
| Machine Age   | mls         | Client Info | <b>13197</b>       | ---      | ---      |
| Oil Age       | mls         | Client Info | <b>13197</b>       | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | ---      | ---      |
| Sample Status |             |             | <b>ATTENTION</b>   | ---      | ---      |

## CONTAMINATION

|        | method    | limit/base | current    | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Glycol | WC Method |            | <b>NEG</b> | ---      | ---      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>75</b>    | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >20  | <b>1</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >4   | <b>0</b>     | ---      | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >20  | <b>6</b>     | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >330 | <b>47</b>    | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >15  | <b>0</b>     | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base    | current     | history1 | history2 |
|------------|--------|---------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0 | <b>24</b>   | ---      | ---      |
| Barium     | ppm    | ASTM D5185m 0 | <b>10</b>   | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m 0 | <b>49</b>   | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m   | <b>6</b>    | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m 0 | <b>769</b>  | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m   | <b>1175</b> | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m   | <b>657</b>  | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m   | <b>847</b>  | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m   | <b>2248</b> | ---      | ---      |

## CONTAMINANTS

|           | method | limit/base      | current    | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>20</b>  | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>6</b>   | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>15</b>  | ---      | ---      |
| Fuel      | %      | ASTM D3524 >5   | <b>1.5</b> | ---      | ---      |

## INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.4</b>  | ---      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>11.9</b> | ---      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>22.7</b> | ---      | ---      |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>23.1</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.4  | <b>6.6</b>  | ---      | ---      |







# OIL ANALYSIS REPORT

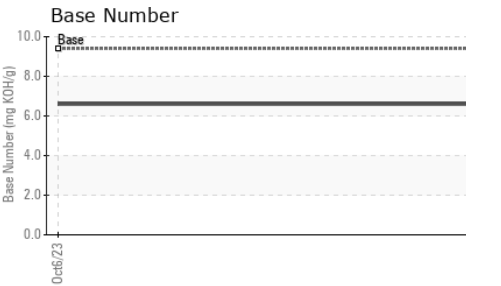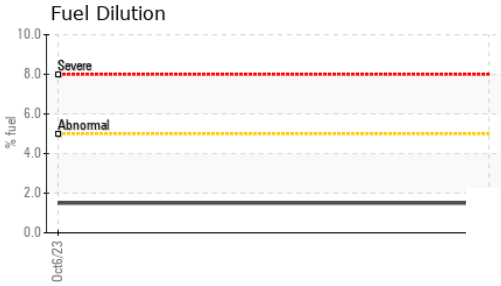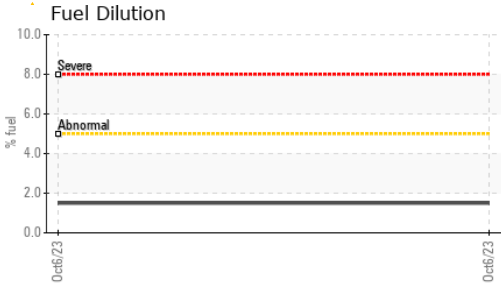

| VISUAL           | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      | --- |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      | --- |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      | --- |
| Free Water       | scalar | *Visual    |         | NEG      | ---      | --- |

| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445 14 | ▲ 11.8  | ---      | ---      |

### GRAPHS

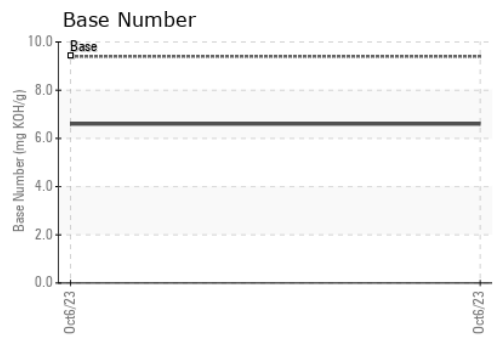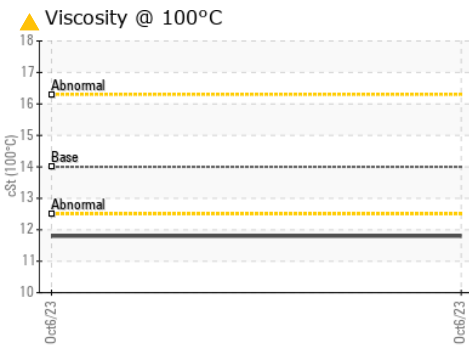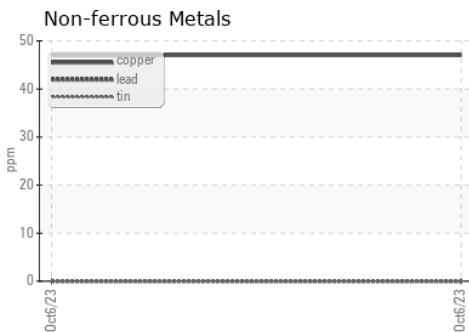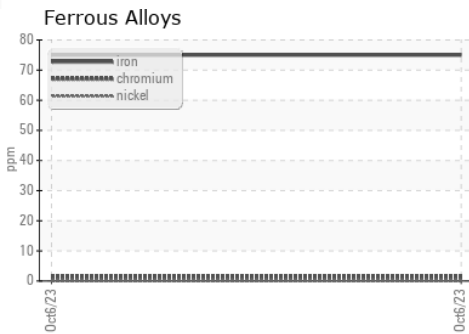

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0030487 **Received** : 07 Nov 2023  
**Lab Number** : 06000912 **Diagnosed** : 09 Nov 2023  
**Unique Number** : 10729272 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**RUSH TRUCK LEASING - CHARLOTTE IDEALEASE**  
 1333 AMERON DR  
 CHARLOTTE, NC  
 US 28206  
 Contact: JERRY DIXON  
 dixonj@rushenterprises.com  
 T: (704)333-4507  
 F: (704)333-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)