




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

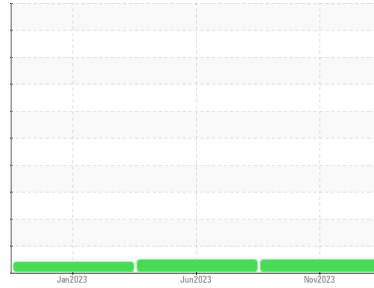

Area  
**SCHTRUCK**  
 Machine Id  
**6376 [SCHTRUCK]**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0005599</b>	SBP0004688	SBP0002454
Sample Date	Client Info		<b>01 Nov 2023</b>	28 Jun 2023	23 Jan 2023
Machine Age	mls	Client Info	<b>109342</b>	71874	32900
Oil Age	mls	Client Info	<b>37468</b>	38974	32900
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	0.4
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>24</b>	35	49
Chromium	ppm	ASTM D5185m >5	<b>1</b>	2	3
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>5</b>	18	31
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >150	<b>72</b>	116	305
Tin	ppm	ASTM D5185m >5	<b>2</b>	4	6
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	5	32
Barium	ppm	ASTM D5185m 0	<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	58	40
Manganese	ppm	ASTM D5185m 0	<b>0</b>	2	4
Magnesium	ppm	ASTM D5185m 1010	<b>860</b>	957	507
Calcium	ppm	ASTM D5185m 1070	<b>1157</b>	1267	1721
Phosphorus	ppm	ASTM D5185m 1150	<b>934</b>	887	683
Zinc	ppm	ASTM D5185m 1270	<b>1186</b>	1202	842
Sulfur	ppm	ASTM D5185m 2060	<b>2189</b>	2492	2314

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	4	7
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	3	7
Potassium	ppm	ASTM D5185m >20	<b>13</b>	36	75

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.2</b>	9.7	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.1</b>	22.1	22.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.3</b>	21.4	22.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>5.3</b>	5.9	8.3







# OIL ANALYSIS REPORT

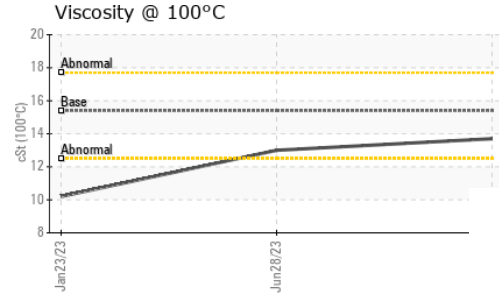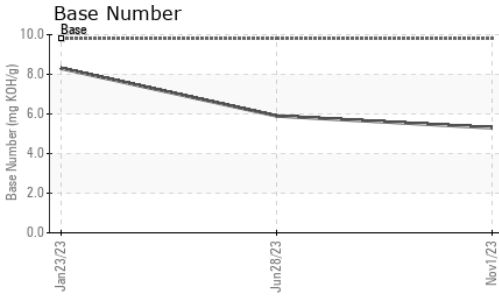

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.0 ▲ 10.2

## GRAPHS

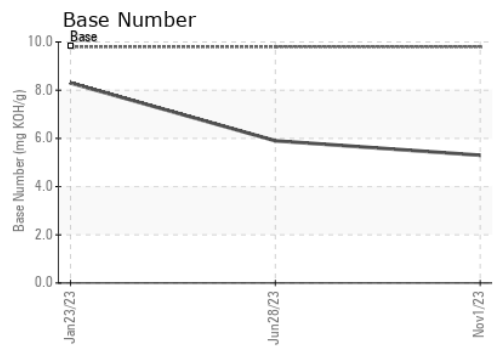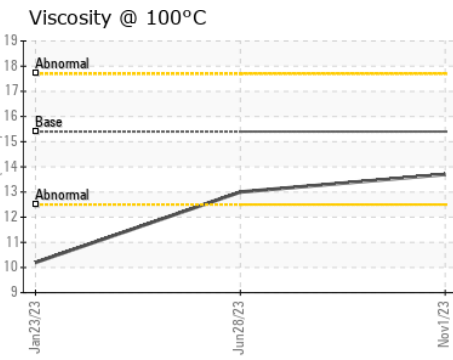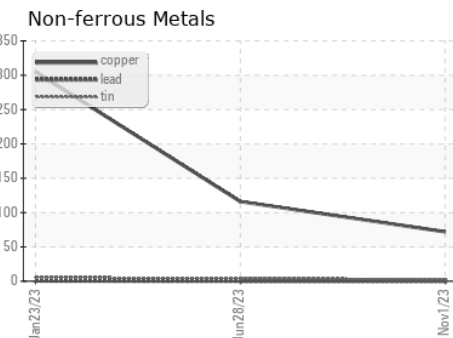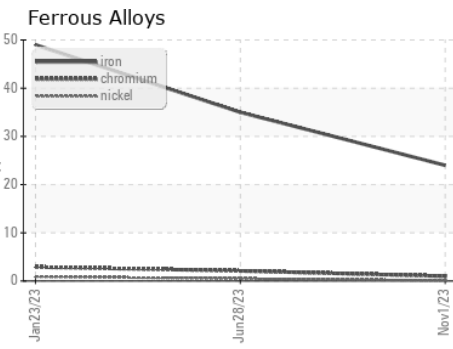

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005599 **Received** : 07 Nov 2023  
**Lab Number** : 06000948 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10729308 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**SCHMIDT TRANSPORTATION - 605449**  
 108 E Bay Road  
 Plattsburgh, NE  
 US 68048  
 Contact: NICK DOTY  
 doty@liquidtrucking.com  
 T: (402)949-9398  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)