




# OIL ANALYSIS REPORT

## Sample Rating Trend

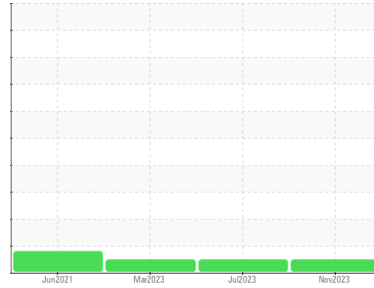

**NORMAL**



Area  
**SCHTRUCK**  
 Machine Id  
**7071 [SCHTRUCK]**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>SBP0005602</b>	SBP0004729	SBP0004167
Sample Date	Client Info	<b>01 Nov 2023</b>	11 Jul 2023	15 Mar 2023
Machine Age	mls Client Info	<b>283018</b>	245084	205416
Oil Age	mls Client Info	<b>37934</b>	39668	33713
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>18</b>	23	32
Chromium	ppm ASTM D5185m >5	<b>1</b>	2	3
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	2	10
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >30	<b>7</b>	9	14
Lead	ppm ASTM D5185m >30	<b>0</b>	0	1
Copper	ppm ASTM D5185m >150	<b>12</b>	17	21
Tin	ppm ASTM D5185m >5	<b>0</b>	2	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	3	20
Barium	ppm ASTM D5185m 0	<b>5</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	66	42
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	2
Magnesium	ppm ASTM D5185m 1010	<b>903</b>	1022	524
Calcium	ppm ASTM D5185m 1070	<b>1096</b>	1374	1721
Phosphorus	ppm ASTM D5185m 1150	<b>953</b>	1075	647
Zinc	ppm ASTM D5185m 1270	<b>1210</b>	1385	961
Sulfur	ppm ASTM D5185m 2060	<b>2780</b>	3342	2468

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>4</b>	5	7
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	2	4
Potassium	ppm ASTM D5185m >20	<b>10</b>	10	19
Chlorine	ppm ASTM D5185m	<b>---</b>	---	---

### INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.7	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>9.7</b>	10.2	10.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.5</b>	22.8	23.2

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.0</b>	20.8	23.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>5.4</b>	6.8	7.0







# OIL ANALYSIS REPORT

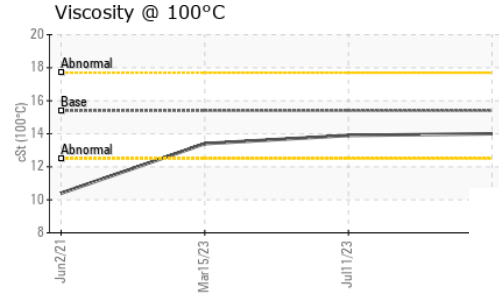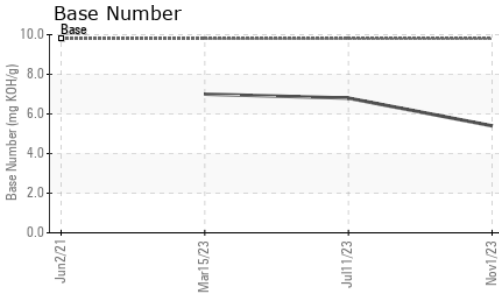

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.9

## GRAPHS

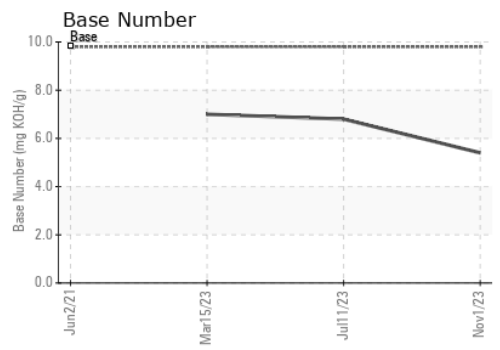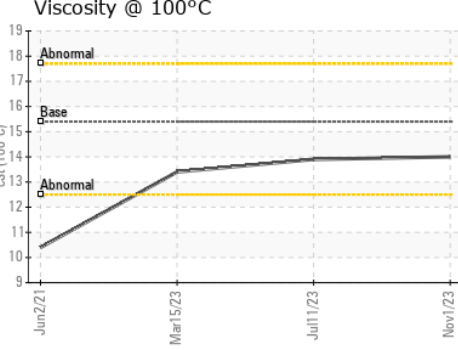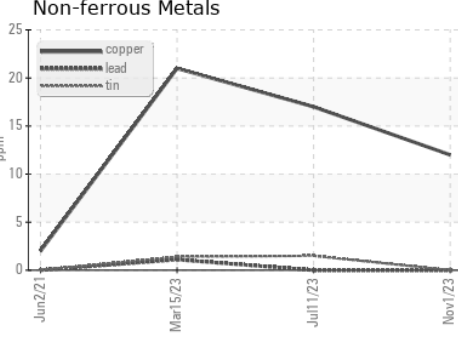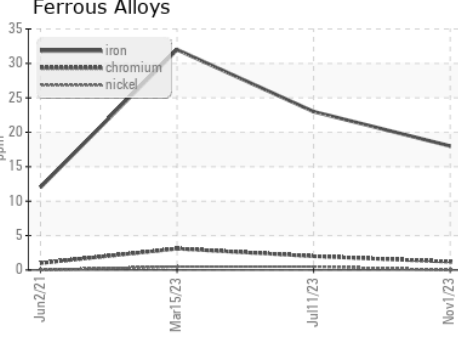

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005602 **Received** : 07 Nov 2023  
**Lab Number** : 06000949 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10729309 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**SCHMIDT TRANSPORTATION - 605449**  
 108 E Bay Road  
 Plattsmouth, NE  
 US 68048  
 Contact: NICK DOTY  
 doty@liquidtrucking.com  
 T: (402)949-9398  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)