




# OIL ANALYSIS REPORT

## Sample Rating Trend

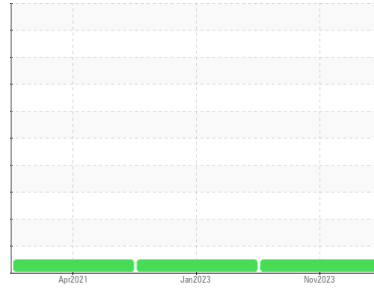

**NORMAL**



Area  
**SCHTRUCK**  
 Machine Id  
**6279 [SCHTRUCK]**

Component  
**Front Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0005900</b>	SBP0002533	SBP26499005
Sample Date	Client Info			<b>01 Nov 2023</b>	23 Jan 2023	28 Apr 2021
Machine Age	mls	Client Info		<b>378762</b>	342478	172882
Oil Age	mls	Client Info		<b>36284</b>	34688	35525
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	0.0

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>27</b>	25	27
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	1	1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>8</b>	11	6
Lead	ppm	ASTM D5185m	>40	<b>2</b>	3	2
Copper	ppm	ASTM D5185m	>330	<b>12</b>	3	10
Tin	ppm	ASTM D5185m	>15	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	24	15
Barium	ppm	ASTM D5185m	0	<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>57</b>	40	2
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>868</b>	477	647
Calcium	ppm	ASTM D5185m	1070	<b>1083</b>	1806	1168
Phosphorus	ppm	ASTM D5185m	1150	<b>869</b>	764	661
Zinc	ppm	ASTM D5185m	1270	<b>1168</b>	1037	710
Sulfur	ppm	ASTM D5185m	2060	<b>2526</b>	2944	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	10	6
Sodium	ppm	ASTM D5185m		<b>5</b>	4	11
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	4	9
Chlorine	ppm	ASTM D5185m		<b>---</b>	---	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.77
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.2</b>	11.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.7</b>	23.4	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.0</b>	22.0	1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>4.0</b>	6.5	---







# OIL ANALYSIS REPORT

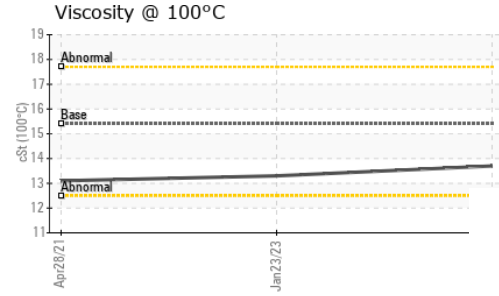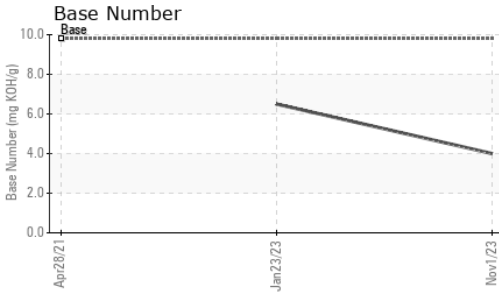

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.3

## GRAPHS

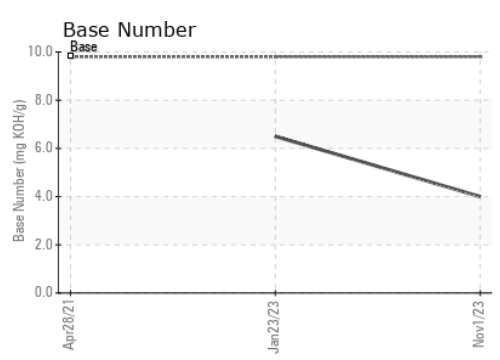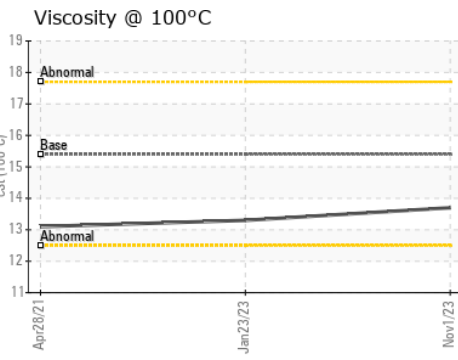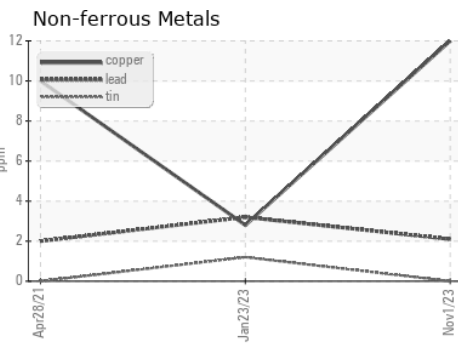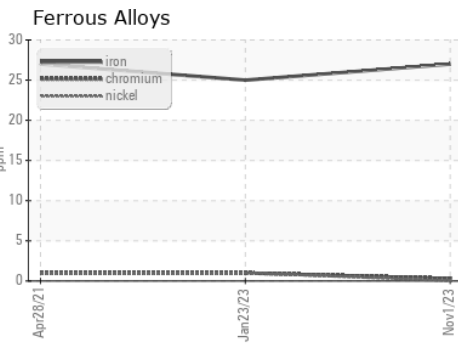

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005900 **Received** : 07 Nov 2023  
**Lab Number** : 06000966 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10729326 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**SCHMIDT TRANSPORTATION - 605449**  
 108 E Bay Road  
 Plattsmouth, NE  
 US 68048  
 Contact: NICK DOTY  
 doty@liquidtrucking.com  
 T: (402)949-9398  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)