




# OIL ANALYSIS REPORT

Sample Rating Trend

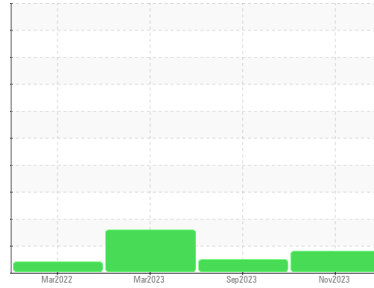

ISO



Area  
**GUAY SON [CONHER]**  
 Machine Id  
**IBACO BM DAGIO I**  
 Component  
**Transmission (Manual)**  
 Fluid  
**RALOEY SAE 50 (60 LTR)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0013350</b>	KL0012864	KL0011410
Sample Date	Client Info		<b>01 Nov 2023</b>	21 Sep 2023	30 Mar 2023
Machine Age	hrs	Client Info	<b>13942</b>	13298	13297
Oil Age	hrs	Client Info	<b>645</b>	1	1543
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status			<b>ABNORMAL</b>	NORMAL	ATTENTION

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>2</b>	<1	3
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m >45	<b>5</b>	4	3
Copper	ppm	ASTM D5185m >225	<b>13</b>	10	10
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>20</b>	22	23
Barium	ppm	ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>9</b>	13	10
Calcium	ppm	ASTM D5185m	<b>3584</b>	3836	3883
Phosphorus	ppm	ASTM D5185m	<b>936</b>	956	939
Zinc	ppm	ASTM D5185m	<b>813</b>	859	865
Sulfur	ppm	ASTM D5185m	<b>5712</b>	6066	6649

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>9</b>	12	12
Sodium	ppm	ASTM D5185m	<b>4</b>	1	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	0

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>96046</b>	12010	14888
Particles >6µm	ASTM D7647	>2500	<b>▲ 18516</b>	975	▲ 3918
Particles >14µm	ASTM D7647	>320	<b>246</b>	41	▲ 434
Particles >21µm	ASTM D7647	>80	<b>46</b>	13	▲ 114
Particles >38µm	ASTM D7647	>20	<b>3</b>	1	11
Particles >71µm	ASTM D7647	>4	<b>1</b>	1	1
Oil Cleanliness	ISO 4406 (c)	>18/15	<b>▲ 21/15</b>	17/13	▲ 19/16

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.69</b>	0.67	0.73




# OIL ANALYSIS REPORT

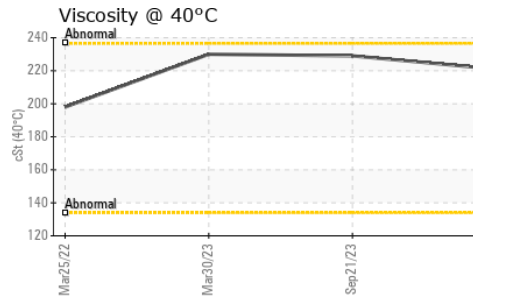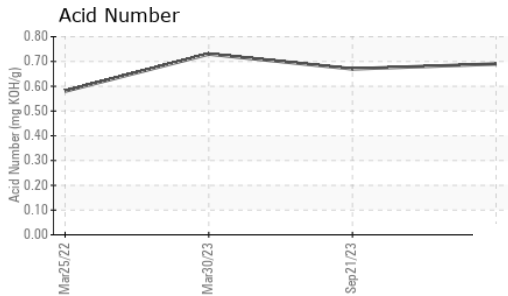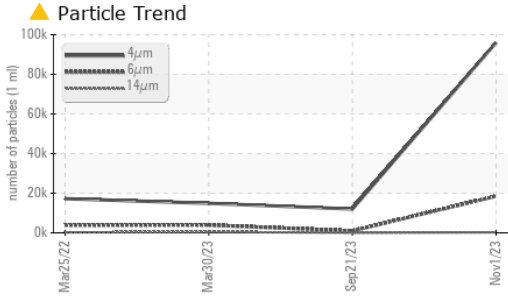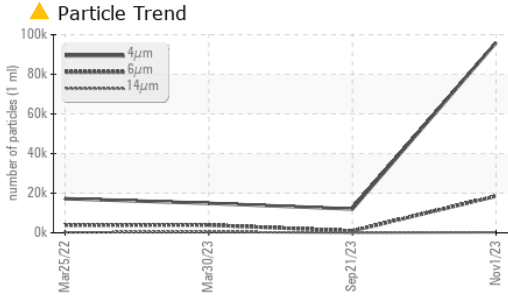






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	221	229	230

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

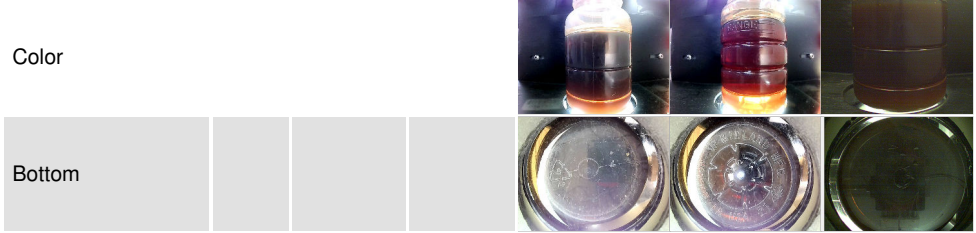

## GRAPHS

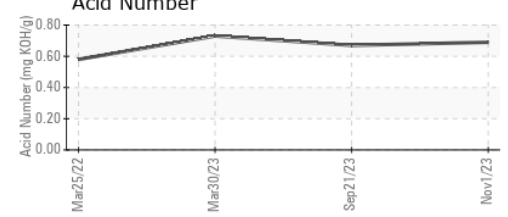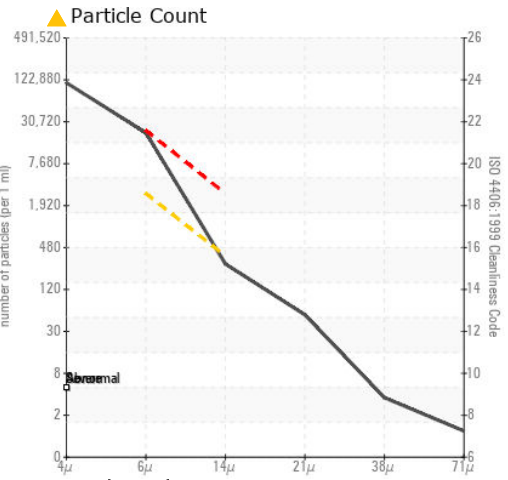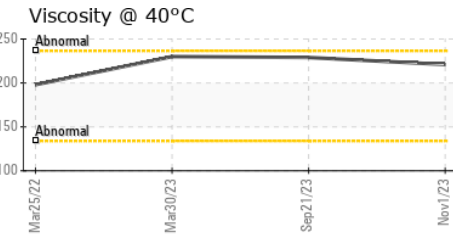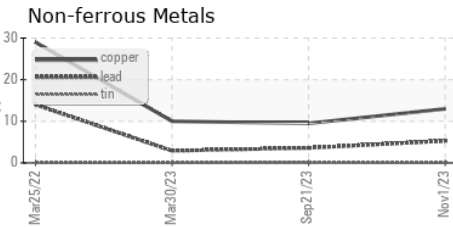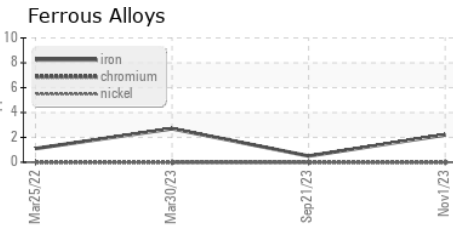

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013350 **Received** : 07 Nov 2023  
**Lab Number** : 06001011 **Diagnosed** : 09 Nov 2023  
**Unique Number** : 10729371 **Diagnostician** : Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)