



PROBLEM SUMMARY

Sample Rating Trend

ISO



Machine Id


PRESS 2 NON-FLAM

Component

Hydraulic System


Fluid

TEXACO HYDRAULIC SAFETY FLUID (--- QTS)

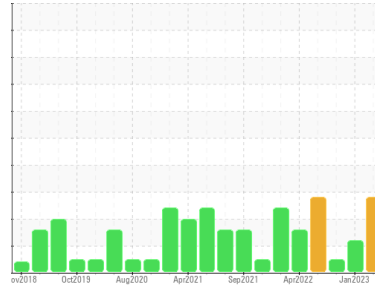

COMPONENT CONDITION SUMMARY

▲ Particle Trend

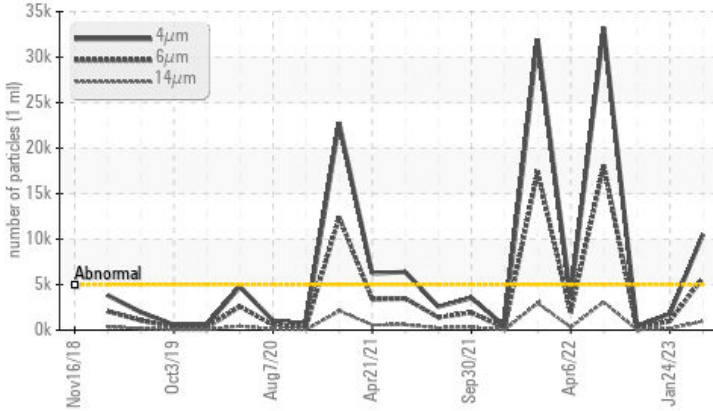

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	ATTENTION	NORMAL
Particles >4µm	ASTM D7647	>5000	▲ 10535	1810	439
Particles >6µm	ASTM D7647	>1300	▲ 5739	986	239
Particles >14µm	ASTM D7647	>160	▲ 977	▲ 168	41
Particles >21µm	ASTM D7647	>40	▲ 329	▲ 57	14
Particles >38µm	ASTM D7647	>10	▲ 51	9	2
Particles >71µm	ASTM D7647	>3	▲ 5	1	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/20/17	▲ 18/17/15	16/15/13

Customer Id: KAIRICVA
 Sample No.: WC0782215
 Lab Number: 06001037
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

24 Jan 2023 Diag: Jonathan Hester

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The pH level of this fluid is within the acceptable limits. The condition of the oil is acceptable for the time in service. pH is 9.00.

view report



03 Jan 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The pH level of this fluid is within the acceptable limits. pH 9.0. The condition of the oil is acceptable for the time in service.

view report



26 Jul 2022 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. pH is 9.00. The pH level of this fluid is within the acceptable limits.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

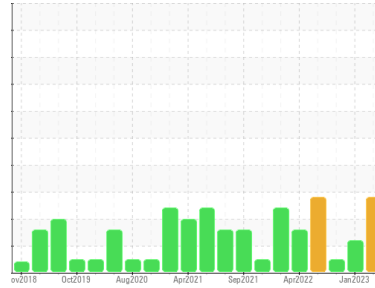

ISO



Machine Id

PRESS 2 NON-FLAM

Component

Hydraulic System

Fluid

TEXACO HYDRAULIC SAFETY FLUID (--- QTS)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil. pH is 9.00.

Fluid Condition

The pH level of this fluid is within the acceptable limits.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0782215	WC0690883	WC0612598
Sample Date	Client Info		03 Nov 2023	24 Jan 2023	03 Jan 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ATTENTION	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	0	<1	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	<1	4
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	2	<1
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		<1	1	<1
Calcium	ppm	ASTM D5185m		0	1	1
Phosphorus	ppm	ASTM D5185m		5	16	12
Zinc	ppm	ASTM D5185m		8	13	6
Sulfur	ppm	ASTM D5185m		0	8	19

CONTAMINANTS






	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Sodium	ppm	ASTM D5185m		<1	0	2
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>45	44.2	41.2	46.9
ppm Water	ppm	ASTM D6304	>450000	442000	412000	469000

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		1.4	1.5	1.5
Nitration	Abs/cm	*ASTM D7624		143.5	137.9	131.3
Sulfation	Abs/.1mm	*ASTM D7415		102.9	99.9	93.0



OIL ANALYSIS REPORT

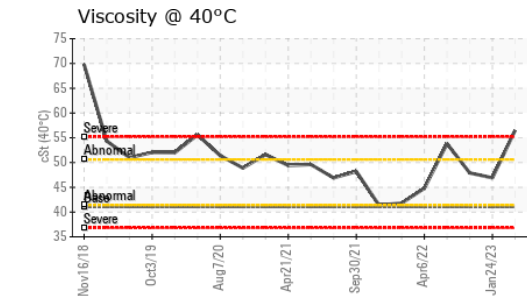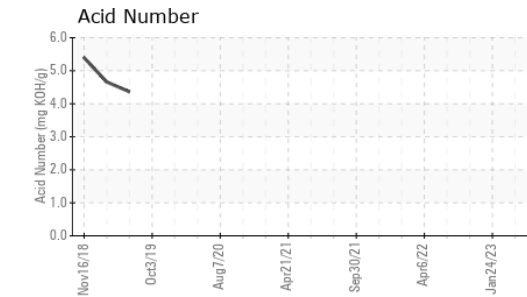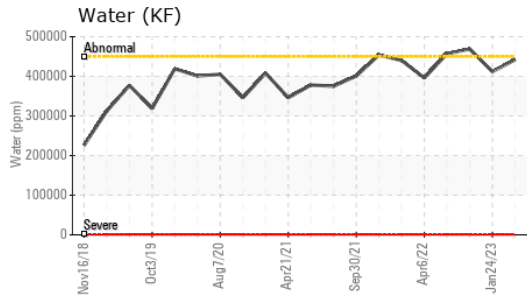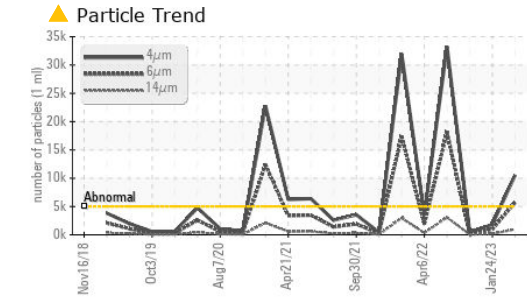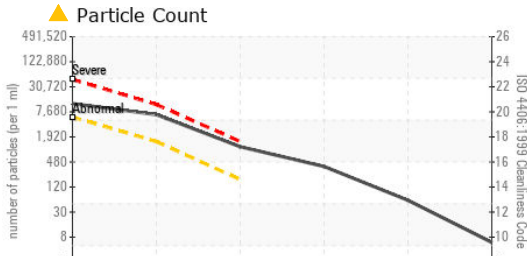

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 10535	1810	439
Particles >6µm	ASTM D7647	>1300	▲ 5739	986	239
Particles >14µm	ASTM D7647	>160	▲ 977	▲ 168	41
Particles >21µm	ASTM D7647	>40	▲ 329	▲ 57	14
Particles >38µm	ASTM D7647	>10	▲ 51	9	2
Particles >71µm	ASTM D7647	>3	▲ 5	1	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/20/17	▲ 18/17/15	16/15/13

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414		135.3	132.8	125.5

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>45	0.2%	NEG	0.2%
Free Water	scalar *Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
pH	Scale 0-14 ASTM D1287		10.0	9.00	9.00
Visc @ 40°C	cSt ASTM D445	41	56.5	46.9	47.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color

Bottom



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0782215
 Lab Number : **06001037**
 Unique Number : 10729397
 Test Package : IND 2 (Additional Tests: FT-IR, KF, pH)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KAISER ALUMINUM
 1901 REYMET RD
 NORTH CHESTERFIELD, VA
 US 23237
 Contact: Yong Quan
 Yong.Quan@kaiseraluminum.com
 T: (804)743-6485
 F: