

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL						
Debris	scalar	*Visual	NONE	A MODER						

Customer Id: SEALAF Sample No.: WC0798218 Lab Number: 06001095 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

IL432069] Machine Id BRADEN NAUT 60B2-50 (S/N 1089106) Component

Auxiliary Winch

Fluid GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0798218		
Sample Date		Client Info		14 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	158		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm		>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m		6		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	<1		
Barium	ppm	ASTM D5185m	15	0		
Molybdenum	ppm	ASTM D5185m	15	0		
Manganese	ppm	ASTM D5185m	15	4		
Magnesium	ppm	ASTM D5185m	50	4 0		
Calcium	ppm	ASTM D5185m	50	13		
Phosphorus	ppm	ASTM D5185m	350	242		
Zinc	ppm	ASTM D5185m	100	53		
Sulfur	ppm	ASTM D5185m	12500	9437		
					la la tanun d	biete w O
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	13		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.31		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE			
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
0.40.00) D				<u> </u>	TONNALI	



OIL ANALYSIS REPORT

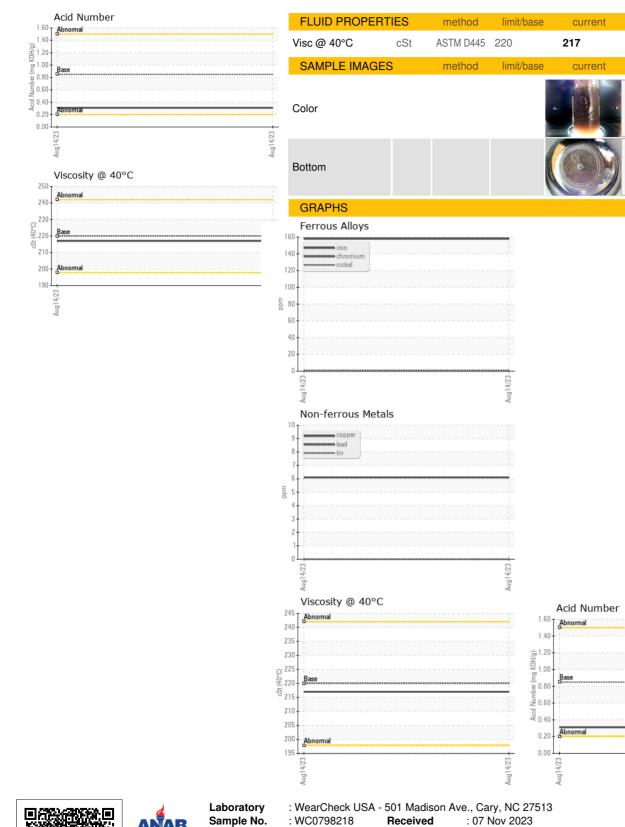

SEATRAX INC 308 GALBERT ROAD LAFAYETTE, LA US 70506 Contact: TONY VALLERY tvallery@seatrax.com T: (337)706-7900 F: (337)706-7901



 Certificate L2367
 Test Package
 : IND 2

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

:06001095

: 10729455

: 09 Nov 2023

Diagnostician : Don Baldridge

Lab Number

Unique Number

Aug14/23

history2

history2

no image

no image

history1

history1

no image

no image