




# PROBLEM SUMMARY

Sample Rating Trend

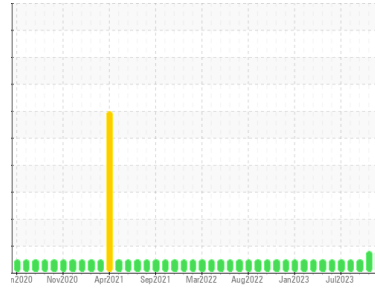


**WEAR**



Area  
**RICK HARNACK**  
 Machine Id  
**[RICK HARNACK] 001 685578-1**  
 Component  
**Port Main Engine**  
 Fluid  
**CHEVRON DELO 400 XLE 15W40 (220 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Non-ferrous Metals

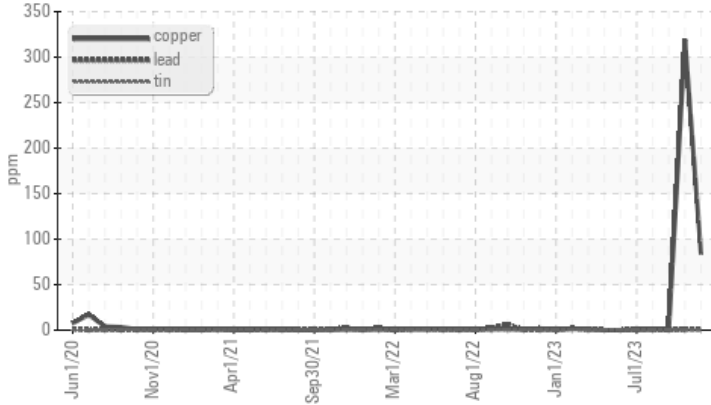

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	NORMAL
Copper	ppm	ASTM D5185m	>80	<b>▲ 84</b>	▲ 319	<1

Customer Id: INGPAD  
 Sample No.: MW0055611  
 Lab Number: 06001137  
 Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Sean Felton +1 919-379-4092  
[sfelton@wearcheckusa.com](mailto:sfelton@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS

### 01 Oct 2023 Diag: Don Baldrige

#### WEAR



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### 01 Sep 2023 Diag: Wes Davis

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### 01 Aug 2023 Diag: Wes Davis

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend

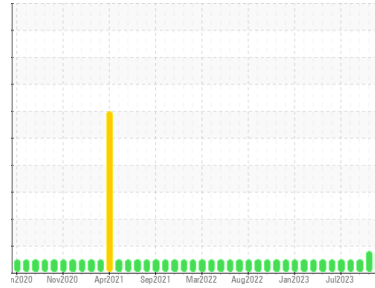

**WEAR**



Area  
**RICK HARNACK**  
 Machine Id  
**[RICK HARNACK] 001 685578-1**  
 Component  
**Port Main Engine**  
 Fluid  
**CHEVRON DELO 400 XLE 15W40 (220 GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The copper level has decreased, but is still abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>MW0055611</b>	MW0055345	MW0055336
Sample Date	Client Info		<b>01 Nov 2023</b>	01 Oct 2023	01 Sep 2023
Machine Age	hrs	Client Info	<b>28189</b>	27457	26841
Oil Age	hrs	Client Info	<b>331</b>	1743	445
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>3</b>	7	4
Chromium	ppm	ASTM D5185m >8	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>3</b>	3	<1
Lead	ppm	ASTM D5185m >18	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m >80	<b>▲ 84</b>	▲ 319	<1
Tin	ppm	ASTM D5185m >14	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>404</b>	297	396
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>119</b>	120	123
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>645</b>	646	684
Calcium	ppm	ASTM D5185m	<b>1562</b>	1450	1625
Phosphorus	ppm	ASTM D5185m 760	<b>661</b>	688	687
Zinc	ppm	ASTM D5185m 830	<b>855</b>	785	837
Sulfur	ppm	ASTM D5185m 2770	<b>2565</b>	2333	2894

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	7	5
Sodium	ppm	ASTM D5185m >75	<b>2</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	3

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	0.4	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	8.2	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.0</b>	23.3	26.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.0</b>	17.8	18.2
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>11.67</b>	9.82	9.64







# OIL ANALYSIS REPORT

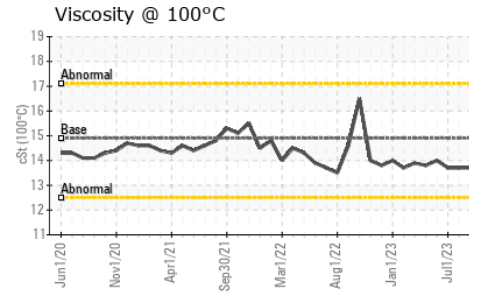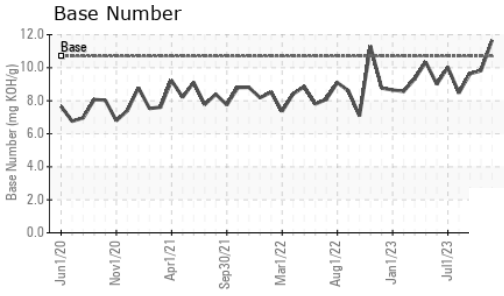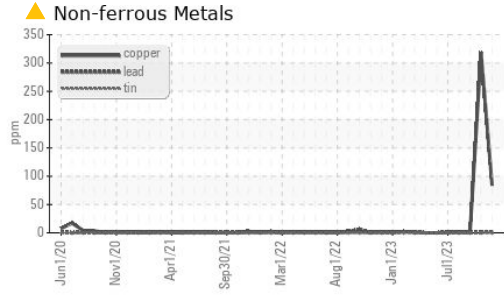

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	13.8	13.7

### GRAPHS

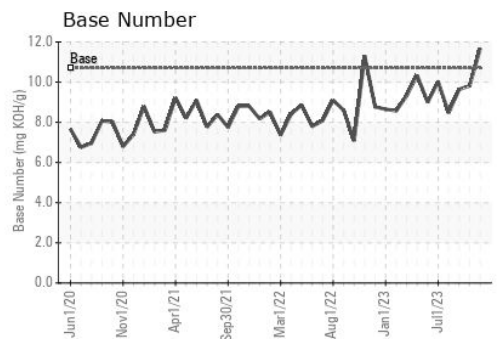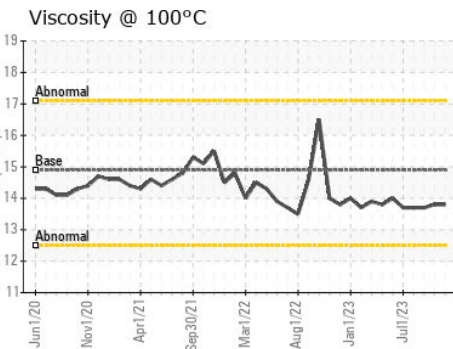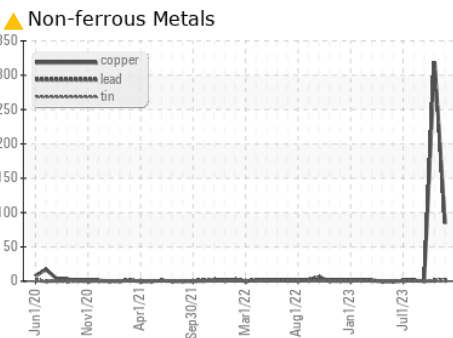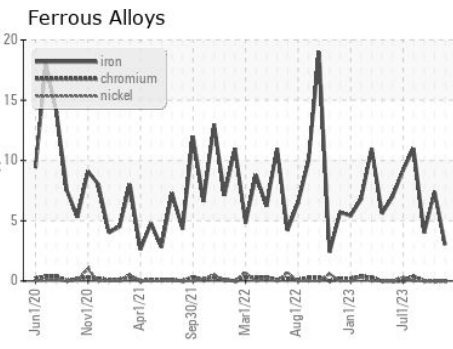

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0055611 **Received** : 07 Nov 2023  
**Lab Number** : **06001137** **Diagnosed** : 09 Nov 2023  
**Unique Number** : 10729497 **Diagnostician** : Sean Felton  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003  
 Contact: ANTHONY VAN CURA  
 anthony.vancura@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)