

FUEL REPORT

Sample Rating Trend



| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|--------------------|---------------|----------------------------|------------|-------------------|-------------|-------------------|
| Sample Number | | Client Info | | KL0013361 | KL0011294 | KL0004696 |
| Sample Date | | Client Info | | 01 Nov 2023 | 28 Nov 2022 | 18 Nov 2020 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Sample Status | | | | ATTENTION | ABNORMAL | ABNORMAL |
| PHYSICAL PROP | PERTIES | 6 method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | | 2.95 | 2.4 | 2.45 |
| SULFUR CONTE | NT | method | limit/base | current | history1 | history2 |
| Sulfur | ppm | ASTM D5185m | | 84 | 0 | <1 |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | <1.0 | <1 | <1 | 2 |
| Sodium | ppm | ASTM D5185m | <0.1 | 1 | 0 | <1 |
| Potassium | ppm | ASTM D5185m | <0.1 | 0 | 0 | 0 |
| Water | % | ASTM D6304 | <0.05 | 0.004 | 0.004 | 0.003 |
| ppm Water | ppm | ASTM D6304 | <500 | 48.0 | 43.9 | 30.3 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >2500 | A 34107 | | 1040 |
| Particles >6µm | | ASTM D7647 | >640 | <u> </u> | | 566 |
| Particles >14µm | | ASTM D7647 | >80 | <u> </u> | | 9 6 |
| Particles >21µm | | ASTM D7647 | >20 | <u> </u> | | <mark>▲</mark> 32 |
| Particles >38µm | | ASTM D7647 | >4 | 2 | | 5 |
| Particles >71µm | | ASTM D7647 | | 0 | | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >18/16/13 | A 22/20/16 | | ▲ 16/14 |
| HEAVY METALS | | method | limit/base | current | history1 | history2 |
| Aluminum | ppm | ASTM D5185m | <0.1 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | <0.1 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | <0.1 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Iron | ppm | ASTM D5185m | <0.1 | 0 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m ASTM D5185m | <0.1 | 0 | 3 | 0 |
| Phosphorus Zinc | ppm ppm | ASTM D5185m | <0.1 | 0 | 0 | 2 |
| | | | | | | |
| SAMPLE IMAGES | 5 | method | limit/base | current | history1 | history2 |
| Bottom | | | | | | |

GUAY SON Machine Id IBACO COZAR VII

Component Front Diesel Fuel Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

A Recommendation

We advise that you filter this fluid before use.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants


There is a high amount of particulates present in the fuel. The water content is negligible.


Fuel Condition

The condition of the fuel is acceptable for the time in service.



FUEL REPORT

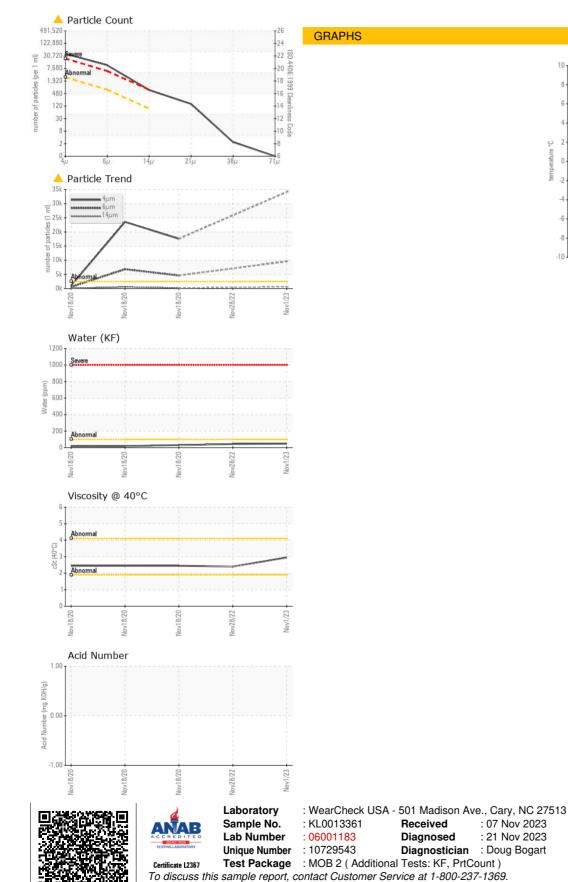

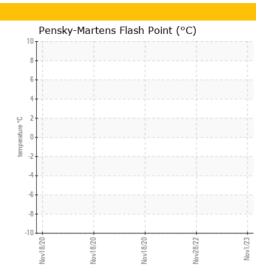

| à | Laboratory | : WearCheck USA | CONOR | | |
|--------------------|-------------------------|---------------------|--------------------|---------------|-------------------------|
| ANAB | Sample No. | : KL0013361 | Received | : 07 Nov 2023 | JUAREZ 348 |
| ACCREDITED | Lab Number | : 06001183 | Diagnosed | : 21 Nov 2023 | HERMOSILLO, |
| TESTING LABORATORY | Unique Number | : 10729543 | Diagnostician | : Doug Bogart | MX 83140 |
| Certificate L2367 | Test Package | : MOB 2 (Additiona | al Tests: KF, PrtC | ount) | Contact: EDUARDO GARCIA |
| To discuss this | egarcia.comsa@gmail.com | | | | |
| * - Denotes te | T: (526)622-1581 x:81 | | | | |
| Statements of o | F: x: | | | | |
| | | | | | |

Report Id: CONHERKL [WUSCAR] 06001183 (Generated: 11/21/2023 22:34:18) Rev: 1

Submitted By: EDUARDO GARCIA

Page 2 of 2