




PROBLEM SUMMARY



Machine Id
CATERPILLAR 12G 8318 (S/N 61M12623)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

Sample Rating Trend

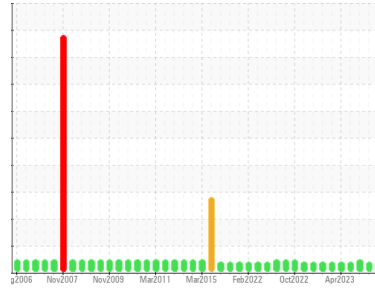


VISCOSITY



COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

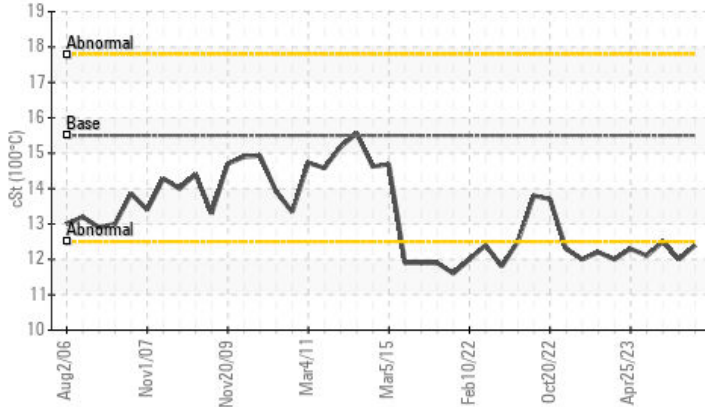

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	ATTENTION	NORMAL
Visc @ 100°C	cSt	ASTM D445	15.5	▲ 12.4	▲ 12.0	12.5

Customer Id: TRANEW
 Sample No.: WC0862974
 Lab Number: 06001253
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

11 Sep 2023 Diag: Jonathan Hester

VISCOSITY



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

[view report](#)



17 Jul 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



30 May 2023 Diag: Don Baldrige

VISCOSITY



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

[view report](#)






OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 12G 8318 (S/N 61M12623)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

Sample Rating Trend

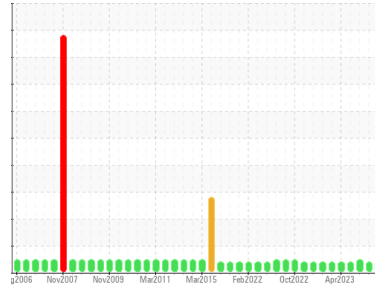

VISCOSITY



DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0862974	WC0836997	WC0816317
Sample Date	Client Info		03 Nov 2023	11 Sep 2023	17 Jul 2023
Machine Age	hrs	Client Info	12357	11872	11311
Oil Age	hrs	Client Info	485	574	393
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ATTENTION	ATTENTION	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >105	10	13	9
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	2	<1	3
Lead	ppm	ASTM D5185m >15	<1	2	0
Copper	ppm	ASTM D5185m >140	3	2	1
Tin	ppm	ASTM D5185m >4	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 1	<1	1	4
Barium	ppm	ASTM D5185m 1	0	0	<1
Molybdenum	ppm	ASTM D5185m 60	72	64	65
Manganese	ppm	ASTM D5185m 1	0	<1	<1
Magnesium	ppm	ASTM D5185m 1010	938	978	990
Calcium	ppm	ASTM D5185m 1070	1094	1259	1166
Phosphorus	ppm	ASTM D5185m 1150	994	1040	1090
Zinc	ppm	ASTM D5185m 1270	1235	1302	1327
Sulfur	ppm	ASTM D5185m 2060	3352	3720	3843

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	6	4
Sodium	ppm	ASTM D5185m	67	36	18
Potassium	ppm	ASTM D5185m >20	19	8	3
Fuel	%	ASTM D3524 >5	<1.0	<1.0	<1.0

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.2	9.1	7.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	19.9	18.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.5	15.2	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.6	8.1	7.6	8.6







OIL ANALYSIS REPORT

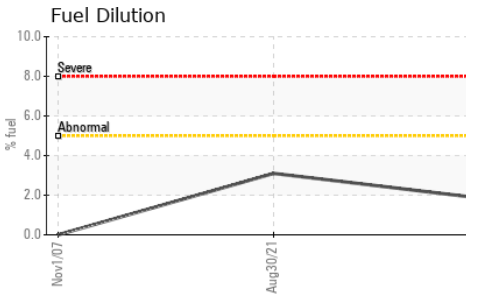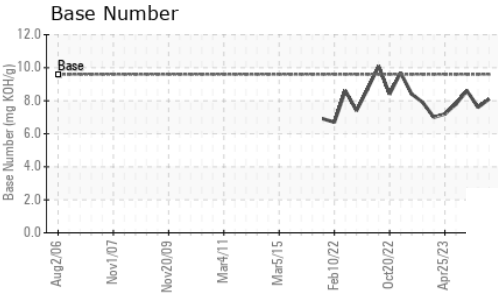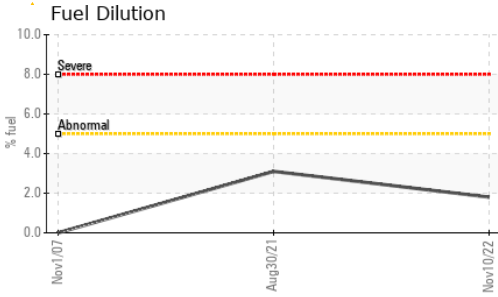

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	▲ 12.4	▲ 12.0

GRAPHS

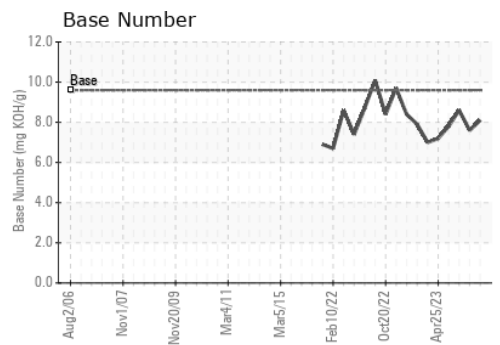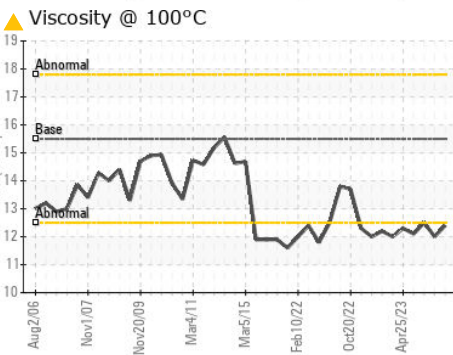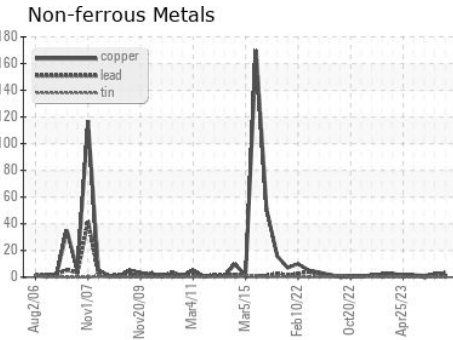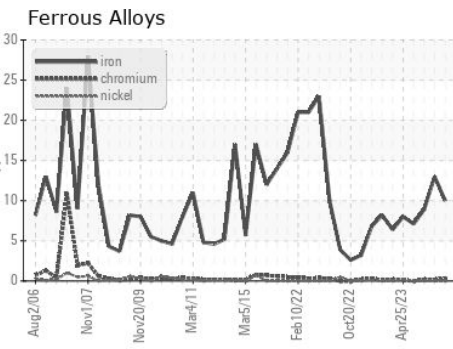

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0862974 **Received** : 08 Nov 2023
Lab Number : 06001253 **Diagnosed** : 09 Nov 2023
Unique Number : 10729613 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, TBN)

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mw Wyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)