


PROBLEM SUMMARY

WRWSB-1 (S/N 16-414)

Hydraulic System

PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (275 GAL)

COMPONENT CONDITION SUMMARY

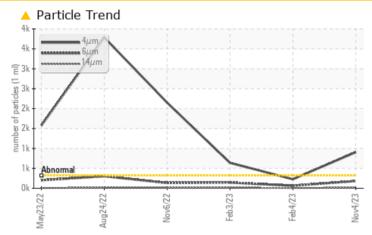

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Viscosity Index Please. Before kidney filtration.)

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	NORMAL	ATTENTION		
Particles >4µm	ASTM D7647	>320	<u> </u>	227	6 38		
Particles >6µm	ASTM D7647	>80	A 181	64	🔺 145		
Particles >14µm	ASTM D7647	>10	<u> </u>	6	1 3		
Oil Cleanliness	ISO 4406 (c)	>15/13/10	 17/15/11	15/13/10	▲ 16/14/11		


Customer Id: WESCONSC Sample No.: WC0782776 Lab Number: 06001563 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

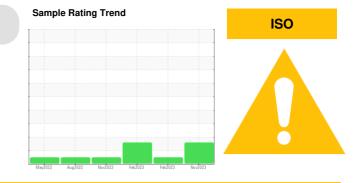

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry and diagnostic comment updates for Target ISO.All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The amount and size of particulates present in the system are acceptable. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

03 Feb 2023 Diag: Doug Bogart

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry and diagnostic comment updates for Target ISO.All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

06 Nov 2022 Diag: Angela Borella



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

view report





OIL ANALYSIS REPORT

Sample Rating Trend ISO

WRWSB-1 (S/N 16-414) Component


Hydraulic System


PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (275 GAL)


DIAGNOSIS	SAMPLE INFOR		mothod	huyzuzz Nov202		Nov2023	history
		NON		limit/base		history1	history2
A Recommendation	Sample Number		Client Info		WC0782776	RW0003453	RW0003452
Resample at the next service interval to monitor. (Customer Sample Comment: Viscosity Index	Sample Date		Client Info		04 Nov 2023	04 Feb 2023	03 Feb 2023
Please. Before kidney filtration.)	Machine Age	hrs	Client Info		43097	37886	37877
Wear	Oil Age	hrs	Client Info		9939	4708	4699
All component wear rates are normal.	Oil Changed		Client Info		N/A	Filtered	Not Changd
	Sample Status				ABNORMAL	NORMAL	ATTENTION
Contamination There is a high amount of particulates present in	WEAR METALS		method	limit/base	current	history1	history2
the oil.	Iron	ppm	ASTM D5185m	>20	8	5	5
Fluid Condition	Chromium	ppm	ASTM D5185m	>20	<1	0	0
The AN level is acceptable for this fluid. The	Nickel	ppm	ASTM D5185m	>20	0	0	0
condition of the oil is suitable for further service.	Titanium	ppm	ASTM D5185m		0	0	0
	Silver	ppm	ASTM D5185m		0	<1	0
	Aluminum	ppm	ASTM D5185m	>20	2	0	0
	Lead	ppm	ASTM D5185m		0	0	0
	Copper	ppm	ASTM D5185m		7	6	6
	Tin	ppm	ASTM D5185m		0	0	0
	Vanadium	ppm	ASTM D5185m		0	0	0
	Cadmium	ppm	ASTM D5185m		0	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m	0	0	0	0
	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m		4	5	5
	Manganese	ppm	ASTM D5185m	1	0	0	0
	Magnesium	ppm	ASTM D5185m		5	3	3
	Calcium	ppm	ASTM D5185m	100	167	183	178
	Phosphorus	ppm	ASTM D5185m	670	597	578	565
	Zinc	ppm	ASTM D5185m	850	842	839	799
	Sulfur	ppm	ASTM D5185m		1833	1796	1716
	CONTAMINANTS	5	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
	Sodium	ppm	ASTM D5185m		0	0	0
	Potassium	ppm	ASTM D5185m	>20	<1	0	0
	FLUID CLEANLI	VESS	method	limit/base	current	history1	history2
	Particles >4µm		ASTM D7647	>320	4 905	227	638
	Particles >6µm		ASTM D7647	>80	<u> </u>	64	1 45
	Particles >14µm		ASTM D7647	>10	1 3	6	1 3
	Particles >21µm		ASTM D7647	>3	3	1	3
	Particles >38µm		ASTM D7647	>3	0	0	0
	Particles >71µm		ASTM D7647	>3	0	0	0
	Oil Cleanliness		ISO 4406 (c)	>15/13/10	A 17/15/11	15/13/10	▲ 16/14/11
	FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
	Acid Number (AN)	mg KOH/g	ASTM D8045	0.60	0.41	0.45	0.43
	. /	- 0					



OIL ANALYSIS REPORT






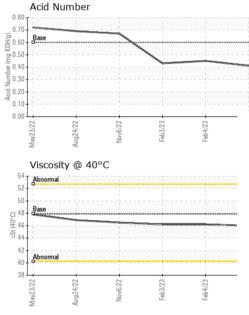

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	47.9	46.0	46.2	46.2
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						

Bottom

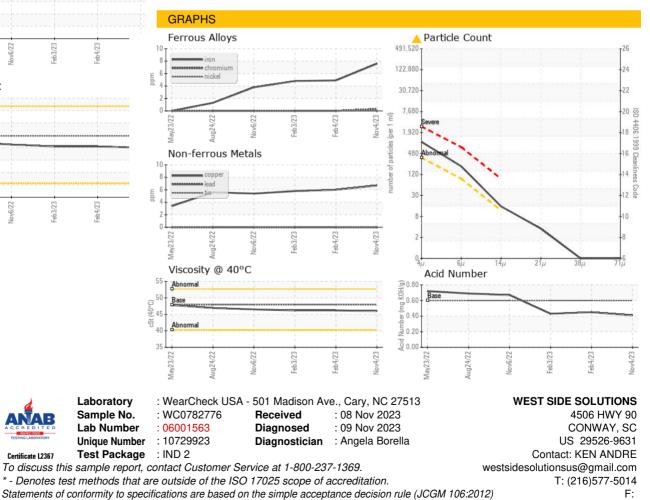

ē