


# PROBLEM SUMMARY

Sample Rating Trend





**DIRT**

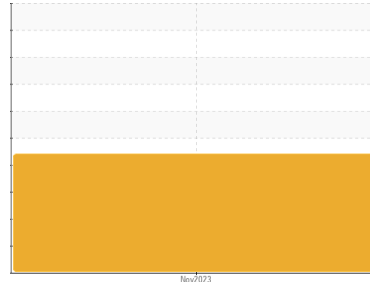

Machine Id  
**HYDRAULIC OIL AW 32**  
Component  
**Hydraulic System**  
Fluid  
**BERICO AW65500 ALA AW 32 (--- GAL)**

## COMPONENT CONDITION SUMMARY

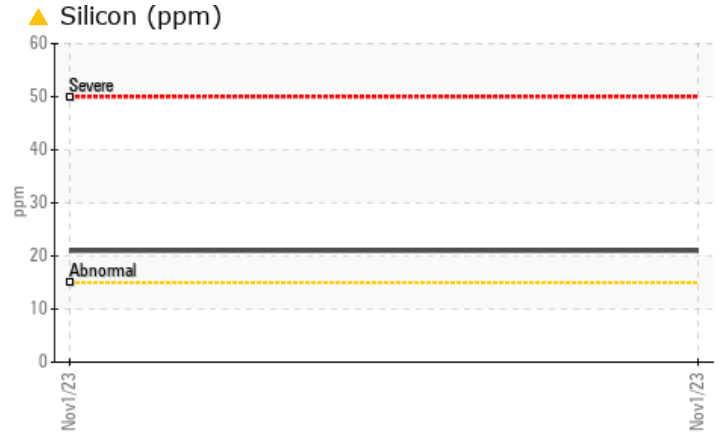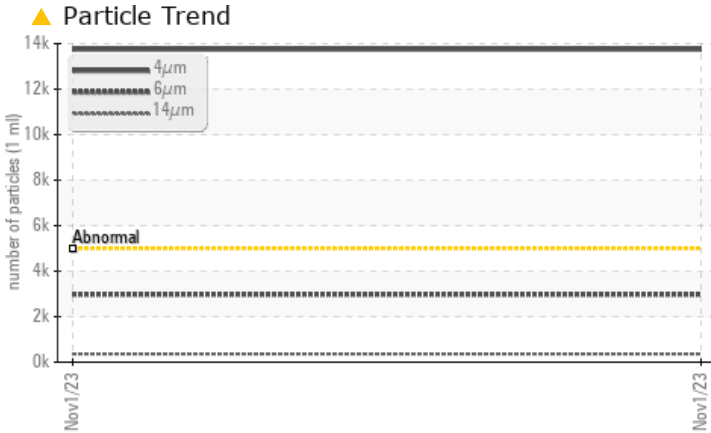

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Silicon	ppm	ASTM D5185m	>15	<b>▲ 21</b>	---	---
Particles >4µm		ASTM D7647	>5000	<b>▲ 13749</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 2977</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>▲ 361</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>▲ 124</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>▲ 12</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>▲ 2</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 21/19/16</b>	---	---

Customer Id: NORTHONC  
Sample No.: ST31298  
Lab Number: 06001593  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Contact Required	---	---	?	Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

## HISTORICAL DIAGNOSIS



Machine Id  
**HYDRAULIC OIL AW 32**  
 Component  
**Hydraulic System**  
 Fluid  
**BERICO AW65500 ALA AW 32 (--- GAL)**



**DIAGNOSIS**

**Recommendation**  
 We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a high amount of particulates present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>ST31298</b>	---	---
Sample Date	Client Info		<b>01 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>8</b>	---	---
Calcium	ppm	ASTM D5185m	<b>38</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>279</b>	---	---
Zinc	ppm	ASTM D5185m	<b>353</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>1354</b>	---	---

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>▲ 21</b>	---	---
Sodium	ppm	ASTM D5185m	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Water	%	ASTM D6304 >0.05	<b>0.011</b>	---	---
ppm Water	ppm	ASTM D6304 >500	<b>110.5</b>	---	---






**FLUID CLEANLINESS**

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 13749</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 2977</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>▲ 361</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>▲ 124</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>▲ 12</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>▲ 2</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 21/19/16</b>	---	---

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.35</b>	---	---

# OIL ANALYSIS REPORT

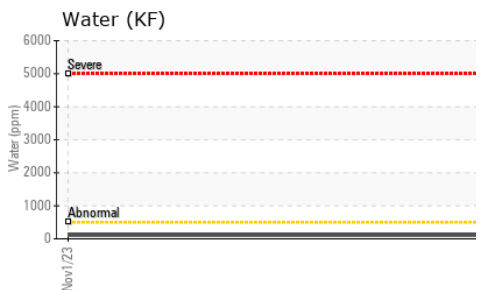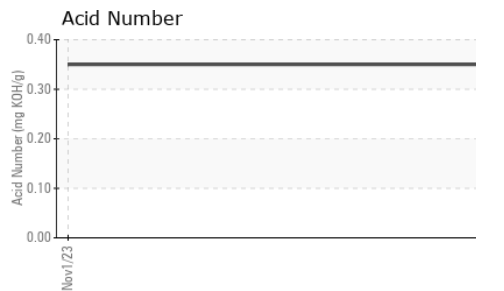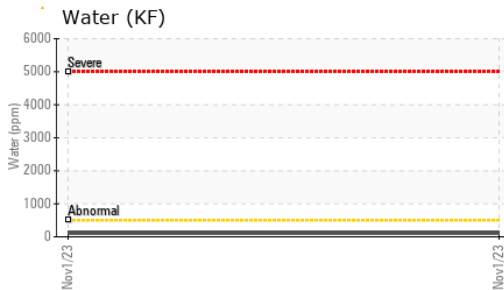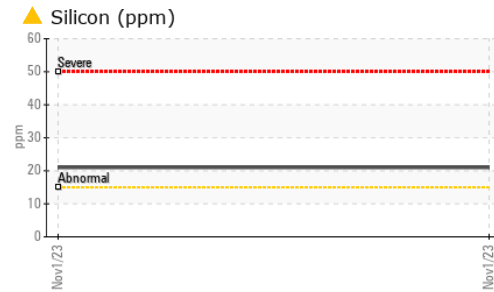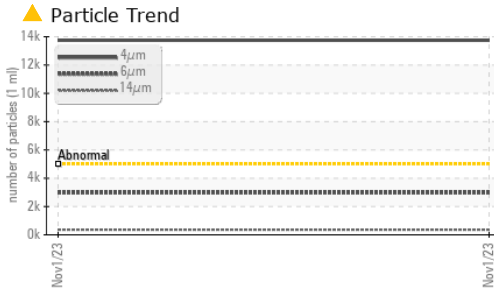




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	30.6	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

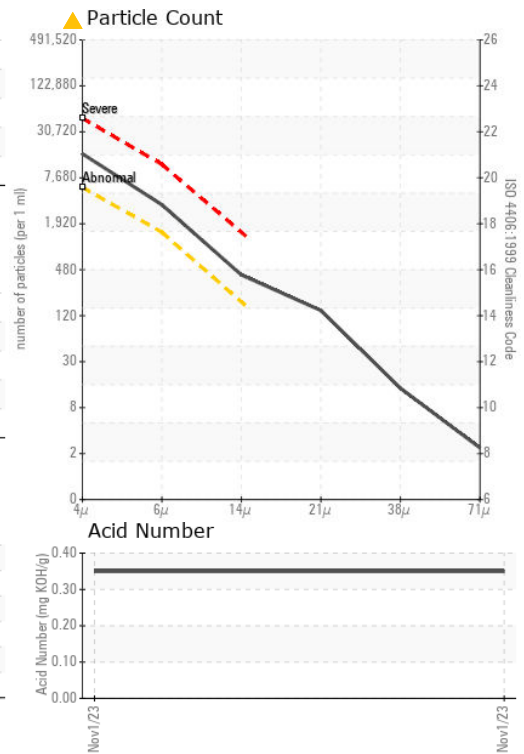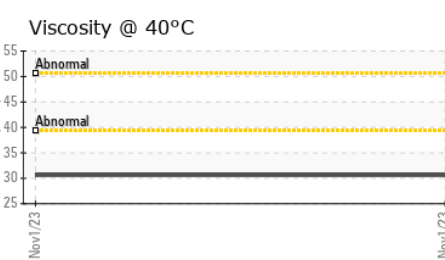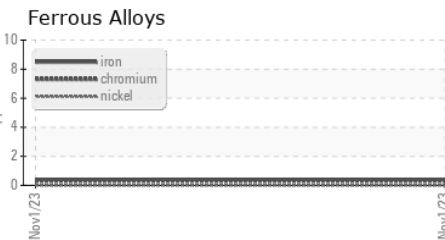

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST31298 **Received** : 08 Nov 2023  
**Lab Number** : 06001593 **Diagnosed** : 10 Nov 2023  
**Unique Number** : 10729953 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**NORTH AMERICAN IMPLEMENTS**  
 215 WASHBOARD RD  
 THOMASVILLE, NC  
 US 27360  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)