


PROBLEM SUMMARY

Sample Rating Trend



Machine Id


KAESER CSD 75 8286797 (S/N 1292)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

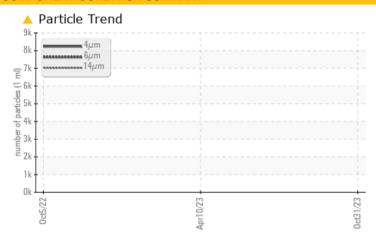

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | | |
|--------------------------|--------------|---------|-----------------|----------|----------|--|--|--|--|
| Sample Status | | | ABNORMAL | ABNORMAL | ABNORMAL | | | | |
| Particles >6µm | ASTM D7647 | >1300 | 2873 | | | | | | |
| Particles >14µm | ASTM D7647 | >80 | 4 317 | | | | | | |
| Particles >21µm | ASTM D7647 | >20 | <u></u> ▲ 83 | | | | | | |
| Oil Cleanliness | ISO 4406 (c) | >/17/13 | 20/19/15 | | | | | | |

Customer Id: ALPCOM Sample No.: KCPA009060 Lab Number: 06001596 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

10 Apr 2023 Diag: Angela Borella

VIS DEBRIS



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



05 Oct 2022 Diag: Doug Bogart

VIS DEBRIS




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

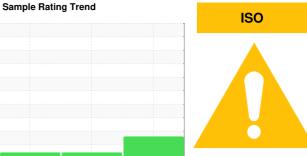

KAESER CSD 75 8286797 (S/N 1292)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | Oct | 2022 | Apr2023 Oct202 | 3 | |
|------------------|----------|--------------|------------|-----------------|-------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCPA009060 | KCP54188 | KCP48237 |
| Sample Date | | Client Info | | 31 Oct 2023 | 10 Apr 2023 | 05 Oct 2022 |
| Machine Age | hrs | Client Info | | 2910 | 952 | 922 |
| Oil Age | hrs | Client Info | | 0 | 952 | 922 |
| Oil Changed | | Client Info | | N/A | Changed | Not Changd |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | 0 | <1 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | 2 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 8 | <1 | 1 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | 1-1- | method | limit/base | current | history1 | history2 |
| | | | | | | |
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 90 | 0 | 7 | 14 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 100 | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 100 | 8 | 75 | 68 |
| Calcium | ppm | ASTM D5185m | 0 | 1 | <1 | 1 |
| Phosphorus | ppm | ASTM D5185m | 0 | 0 | 2 | 4 |
| Zinc | ppm | ASTM D5185m | 0 | 4 | 0 | 1 |
| Sulfur | ppm | ASTM D5185m | 23500 | 21391 | 21579 | 22212 |
| CONTAMINANTS | 5 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | 2 | <1 |
| Sodium | ppm | ASTM D5185m | | 0 | 9 | 6 |
| Potassium | ppm | ASTM D5185m | | 2 | 4 | 4 |
| Water | % | ASTM D6304 | >0.05 | 0.013 | 0.010 | 0.023 |
| ppm Water | ppm | ASTM D6304 | >500 | 134.5 | 109.1 | 238.7 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4μm | | ASTM D7647 | | 8050 | | |
| Particles >6µm | | ASTM D7647 | >1300 | <u>^</u> 2873 | | |
| Particles >14μm | | ASTM D7647 | >80 | <u> </u> | | |
| Particles >21μm | | ASTM D7647 | >20 | <u>▲</u> 83 | | |
| Particles >38μm | | ASTM D7647 | >4 | 4 | | |
| Particles >71μm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | <u>20/19/15</u> | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.0 | 0.39 | 0.39 | 0.39 |



OIL ANALYSIS REPORT







Certificate L2367

Sample No. Lab Number **Unique Number**

: KCPA009060 : 06001596

Received Diagnosed : 10729956

: 10 Nov 2023 Diagnostician : Jonathan Hester

: IND 2 (Additional Tests: KF, PrtCount)

Test Package To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

7301 KEARNEY ST COMMERCE CITY, CO

US 80022

Contact: Service Manager

T: F: