




PROBLEM SUMMARY


Sample Rating Trend

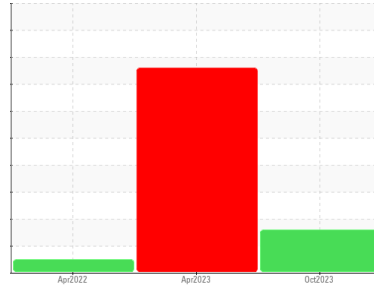

Machine Id
KAESER 6269053
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) FG-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

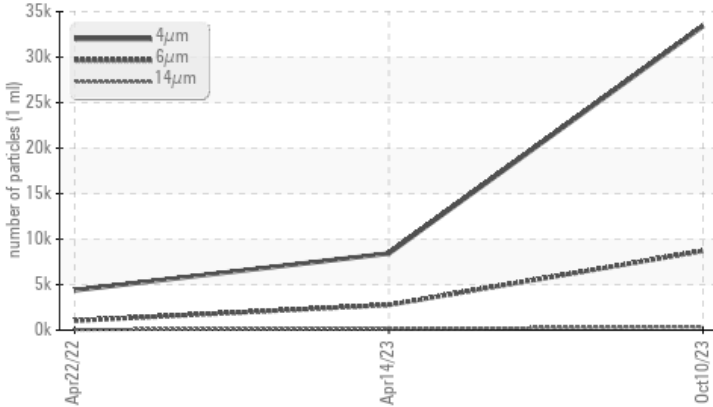

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	SEVERE	NORMAL
Particles >6µm	ASTM D7647	>1300	▲ 8698	▲ 2765	1034
Particles >14µm	ASTM D7647	>80	▲ 340	▲ 177	61
Particles >21µm	ASTM D7647	>20	▲ 58	▲ 28	11
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 22/20/16	▲ 20/19/15	17/13

Customer Id: BARNAP
 Sample No.: KCPA007739
 Lab Number: 06001608
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

14 Apr 2023 Diag: Jonathan Hester

WEAR



Oil and filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample in 500 hours to monitor this condition. The aluminum level is severe. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid.

view report



22 Apr 2022 Diag: Angela Borella

NORMAL




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

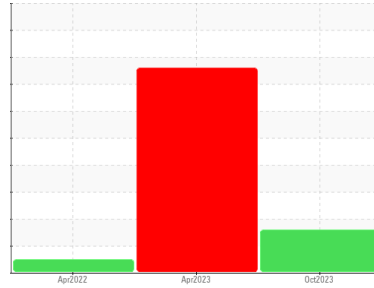

ISO



Machine Id
KAESER 6269053
Component
Compressor
Fluid
KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA007739	KCP52748	KCP44783
Sample Date	Client Info		10 Oct 2023	14 Apr 2023	22 Apr 2022
Machine Age	hrs	Client Info	42019	38196	30236
Oil Age	hrs	Client Info	0	2950	8320
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			ABNORMAL	SEVERE	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	2	21	2
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	2	66	2
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >50	<1	<1	<1
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1
Barium	ppm	ASTM D5185m	0	1	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m	<1	<1	0
Calcium	ppm	ASTM D5185m	0	0	0
Phosphorus	ppm	ASTM D5185m 500	17	409	24
Zinc	ppm	ASTM D5185m	0	218	0
Sulfur	ppm	ASTM D5185m	1362	1611	754

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	<1	0
Sodium	ppm	ASTM D5185m	0	0	0
Potassium	ppm	ASTM D5185m >20	1	1	<1
Water	%	ASTM D6304 >0.05	0.005	0.011	0.003
ppm Water	ppm	ASTM D6304 >500	57.1	114.9	37.9






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		33400	8422	4385
Particles >6µm	ASTM D7647	>1300	▲ 8698	▲ 2765	1034
Particles >14µm	ASTM D7647	>80	▲ 340	▲ 177	61
Particles >21µm	ASTM D7647	>20	▲ 58	▲ 28	11
Particles >38µm	ASTM D7647	>4	1	2	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 22/20/16	▲ 20/19/15	17/13

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.5	0.38	1.40	0.47


OIL ANALYSIS REPORT

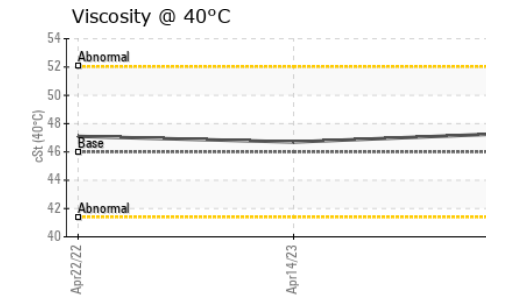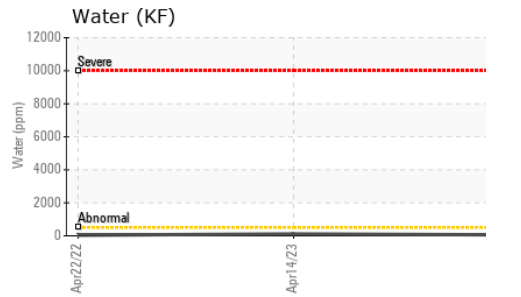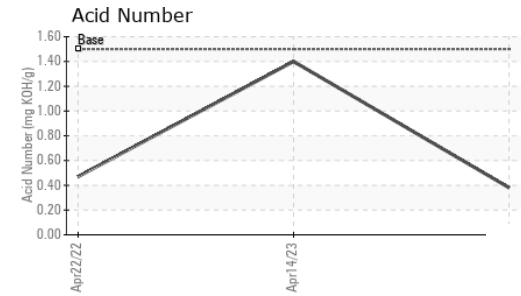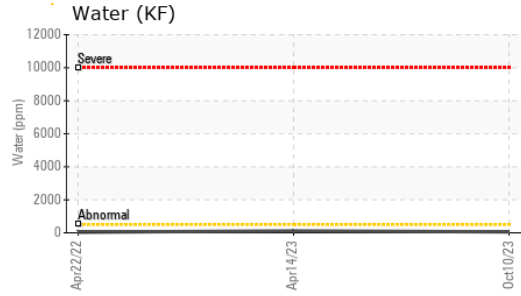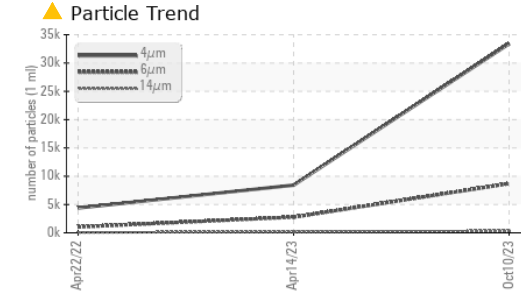





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	47.3	46.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

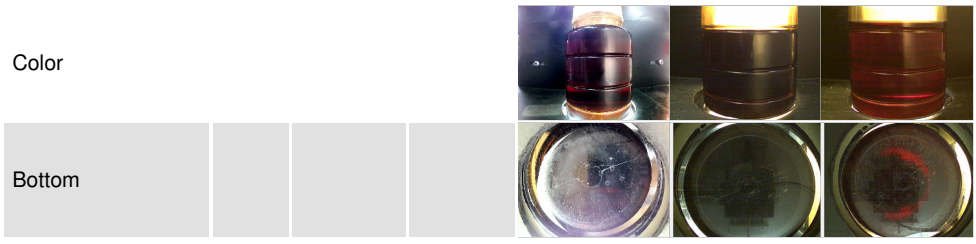

GRAPHS

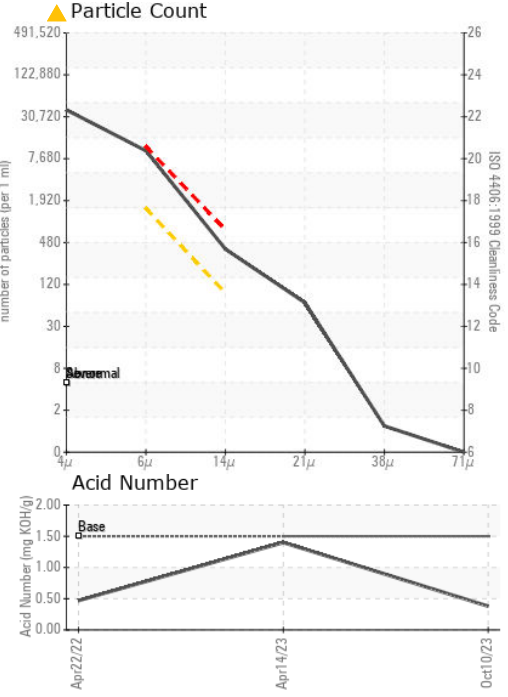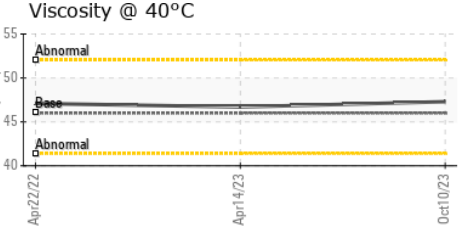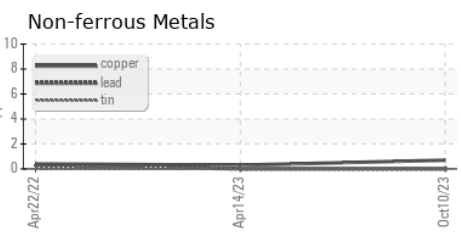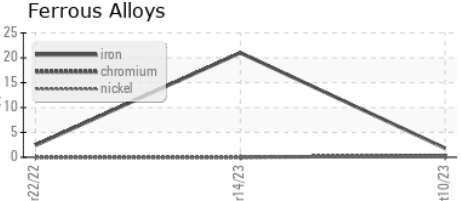

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA007739 **Received** : 08 Nov 2023
Lab Number : 06001608 **Diagnosed** : 09 Nov 2023
Unique Number : 10729968 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PrtCount)

BARREL TEN QUARTER CIRCLE
 33 HARLOW CT
 NAPA, CA
 US 94558
 Contact: EDRICK REISINGER
 edrick.reisinger@broncowine.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)