

# **OIL ANALYSIS REPORT**

### Sample Rating Trend





**Compressor** Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jul201	6 Feb2017	Mar2018 N	ov2023	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06001620	KC65221	KC56224
Sample Date		Client Info		01 Nov 2023	01 Mar 2018	24 Feb 2017
Machine Age	hrs	Client Info		20601	4433	2915
Oil Age	hrs	Client Info		0	0	1000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	2	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	2
Copper	ppm	ASTM D5185m		17	2	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
	ррпі					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	14	24	30
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		0	35	<1
Zinc	ppm	ASTM D5185m		26	18	19
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		1	21	15
Potassium	ppm	ASTM D5185m	>20	2	2	8
Water	%	ASTM D6304	>0.05	0.010	▲ 0.059	0.019
ppm Water	ppm	ASTM D6304	>500	104.9	▲ 590	190
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2768	2757	2705
Particles >6µm		ASTM D7647	>1300	687	364	780
Particles >14µm		ASTM D7647	>80	55	28	<b>A</b> 82
Particles >21µm		ASTM D7647	>20	16	12	<u> </u>
Particles >38µm		ASTM D7647	>4	1	3	<b>6</b>
Particles >71µm		ASTM D7647	>3	0	2	<u> </u>
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	16/12	▲ 17/14
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.29	0.257	0.268
( -)	0 - 9				-	



**OIL ANALYSIS REPORT** 

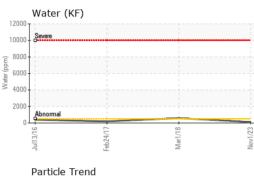


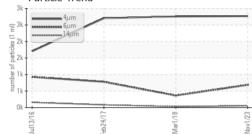

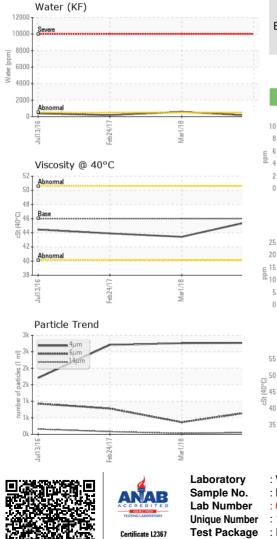

NONE NONE White Metal \*Visual NONE NONE scalar NONE NONE NONE NONE Yellow Metal scalar \*Visual Precipitate scalar \*Visual NONE NONE NONE NONE Silt scalar \*Visual NONE NONE NONE NONE NONE NONE Debris \*Visual NONE VLITE scalar NONE Sand/Dirt scalar \*Visual NONE NONE NONE NORML Appearance NORML NORML NORML scalar \*Visua Odor \*Visual NORML NORML NORML NORML scalar **Emulsified Water** scalar \*Visual >0.05 NEG NEG NEG Free Water scalar \*Visual NEG NEG NEG FLUID PROPERTIES Visc @ 40°C cSt ASTM D445 46 45.7 43.43 43.9 Color

Bottom

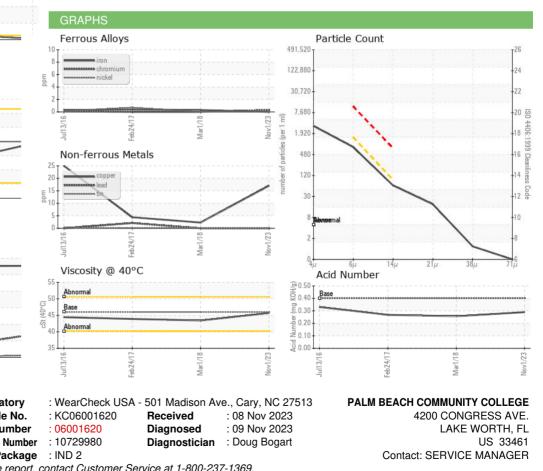

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SERVICE MANAGER - PALLAK