



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
TODAYS CAR WASH 6 - 31ST ST BLDA A TEMPLE
 Machine Id
6-3-PP
 Component
3 Hydraulic Power Pack
 Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0877675	---	---
Sample Date	Client Info	08 Nov 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	0	---	---
Chromium ppm ASTM D5185m	>20	0	---	---
Nickel ppm ASTM D5185m	>20	0	---	---
Titanium ppm ASTM D5185m		0	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>20	0	---	---
Lead ppm ASTM D5185m	>20	<1	---	---
Copper ppm ASTM D5185m	>20	2	---	---
Tin ppm ASTM D5185m	>20	<1	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	5	0	---	---
Barium ppm ASTM D5185m	5	0	---	---
Molybdenum ppm ASTM D5185m	5	0	---	---
Manganese ppm ASTM D5185m		<1	---	---
Magnesium ppm ASTM D5185m	25	<1	---	---
Calcium ppm ASTM D5185m	200	36	---	---
Phosphorus ppm ASTM D5185m	300	275	---	---
Zinc ppm ASTM D5185m	370	355	---	---
Sulfur ppm ASTM D5185m	2500	786	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	2	---	---
Sodium ppm ASTM D5185m		0	---	---
Potassium ppm ASTM D5185m	>20	0	---	---

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	344	---	---
Particles >6µm ASTM D7647	>1300	90	---	---
Particles >14µm ASTM D7647	>160	11	---	---
Particles >21µm ASTM D7647	>40	4	---	---
Particles >38µm ASTM D7647	>10	0	---	---
Particles >71µm ASTM D7647	>3	0	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	16/14/11	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.57	0.36	---	---



OIL ANALYSIS REPORT

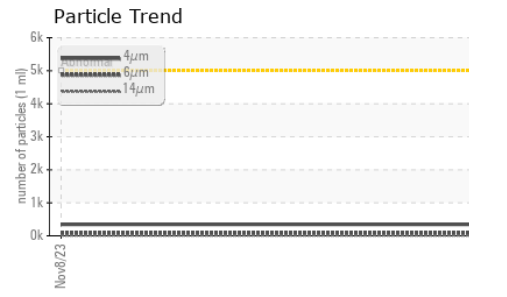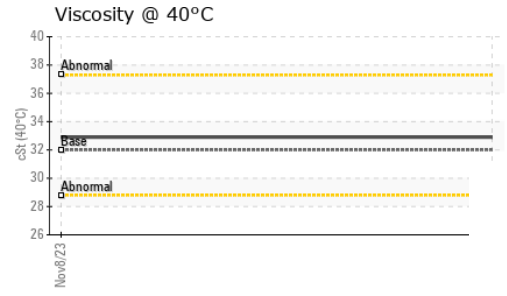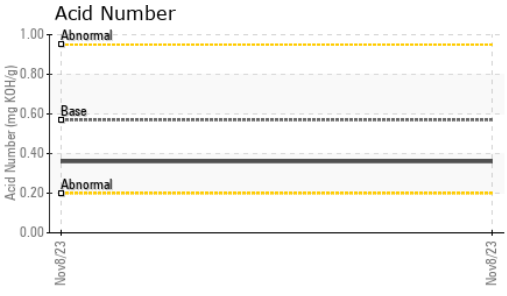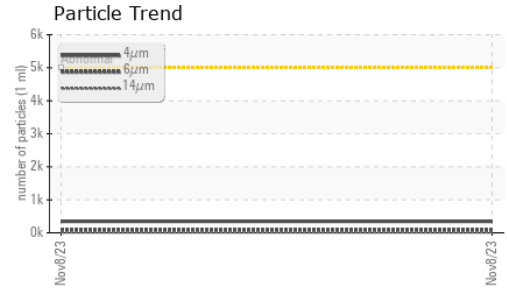






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	32.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

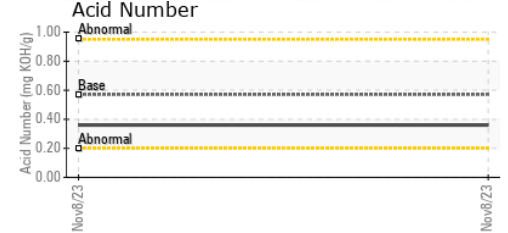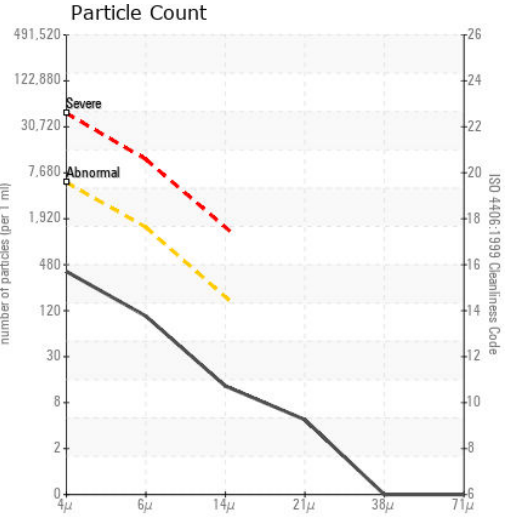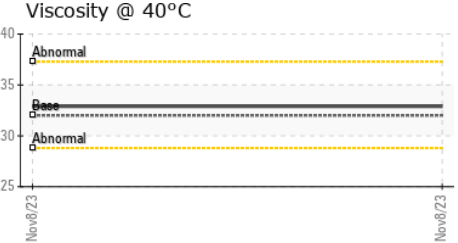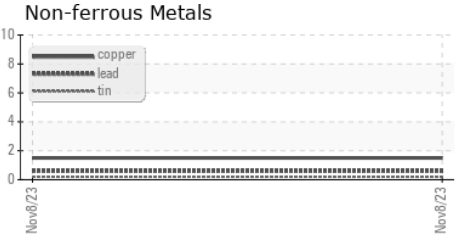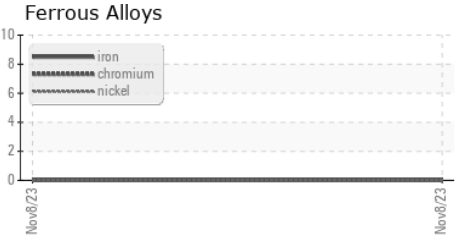

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0877675 **Received** : 13 Nov 2023
Lab Number : 06006292 **Diagnosed** : 14 Nov 2023
Unique Number : 10740054 **Diagnostician** : Doug Bogart
Test Package : PLANT

TODAYS CAR WASH
 514 S FT HOOD STREET
 KILLEEN, TX
 US 76549-6289
 Contact: HOWARD SCHULTZ
 howards@todayscarwash.com
 T: (248)431-8760
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)