


PROBLEM SUMMARY

Area TODAYS CAR WASH 3 - CLEAR CREEK RD KILLEEN 3-4-PP

Component 4 Hydraulic Power Pack Fluid AW HYDRAULIC OIL ISO 32 (--- GAL)

COMPONENT CONDITION SUMMARY

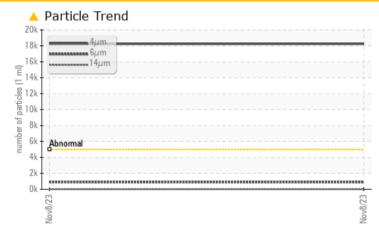

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status			ABNORMAL							
Particles >4µm	ASTM D7647	>5000	A 18256							
Oil Cleanliness	ISO 4406 (c)	>19/17/14	4 21/17/11							


Customer Id: TODKIL Sample No.: WC0877686 Lab Number: 06006301 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

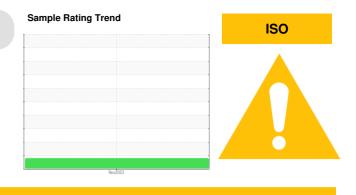

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



TODAYS CAR WASH 3 - CLEAR CREEK RD KILLEEN 3-4-PP

Component 4 Hydraulic Power Pack Fluid AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0877686		
Sample Date		Client Info		08 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	1		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	25	0		
Calcium	ppm	ASTM D5185m	200	13		
Phosphorus	ppm	ASTM D5185m	300	321		
Zinc	ppm	ASTM D5185m	370	350		
Sulfur	ppm	ASTM D5185m	2500	969		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	A 18256		
Particles >6µm		ASTM D7647	>1300	902		
Particles >14µm		ASTM D7647	>160	14		
Particles >21µm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 21/17/11		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.23		



Acid Number

1.00

OIL ANALYSIS REPORT

method


limit/base


current


history1

history2


VISUAL





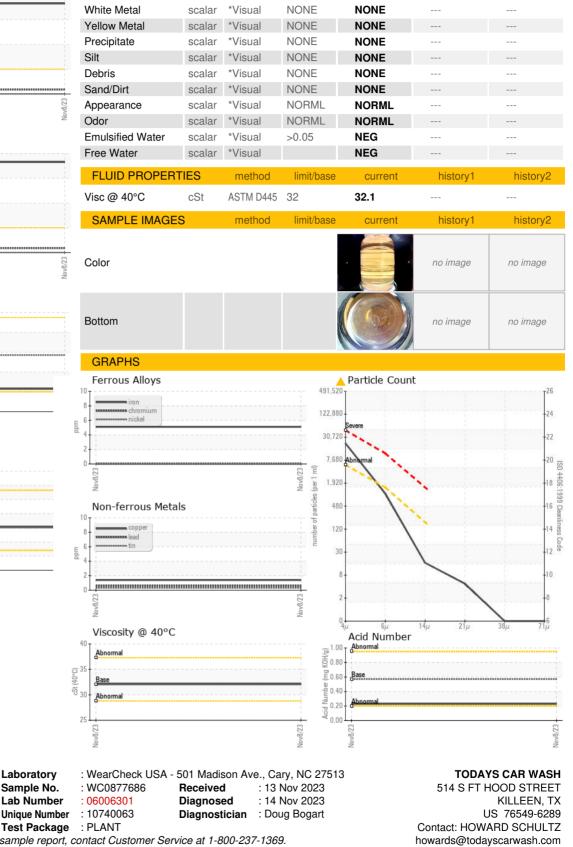

0.8 물0.60 Ê n 40 Pig 0.2 0.00 Viscosity @ 40°C 40 38 36 tz 32 30 Abnorm 28 26 1018/72



Laboratory

Sample No.

Lab Number

Unique Number

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: HOWARD SCHULTZ - TODKIL

F:

T: (248)431-8760