


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id **C 5531A C 5531A**

Component

Reciprocating Compressor

ROYAL PURPLE SYNFILM 150 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

12016 Mur2019 Nov2019 Sep2020 Jul2021 Apr2022 Sep2022 Jun2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		HLC0002586	HLC0001479	HLC0002632
Sample Date		Client Info		04 Nov 2023	03 Oct 2023	05 Sep 2023
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	0
Lead	ppm	ASTM D5185m	>25	<1	0	0
Copper	ppm	ASTM D5185m	>50	0	<1	0
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	95	95	94
Calcium	ppm	ASTM D5185m		3	4	<1
Phosphorus	ppm	ASTM D5185m		1	<1	2
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		17660	18183	22978
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	<1	<1
Sodium	ppm	ASTM D5185m		0	<1	1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		296	4974	280
Particles >6µm		ASTM D7647	>2500	73	964	39
Particles >14µm		ASTM D7647	>320	8	32	4
Particles >21µm		ASTM D7647	>80	4	5	0
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	15/13/10	19/17/12	15/12/9
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN) mg KOH/g ASTM D8045 0.25


0.37


0.35

0.35




OIL ANALYSIS REPORT

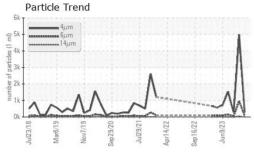

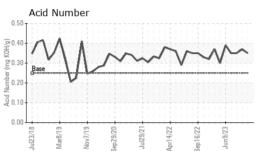

Juli23/18 Mar8/19 Nov7/19 ep29/20 Juli29/21	23
22 V. v. v. v. 11	Jun9/2
Jul23/1 Mar6/7 Nov7/7 Sep 29/2 Jul29/7 Sep 16/7	3

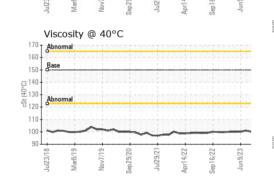

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPER	HES	method			history1	history2
Visc @ 40°C	cSt	ASTM D445	150	101	100	100

SAMP	LE I	IMA	GES	



Bottom

Color

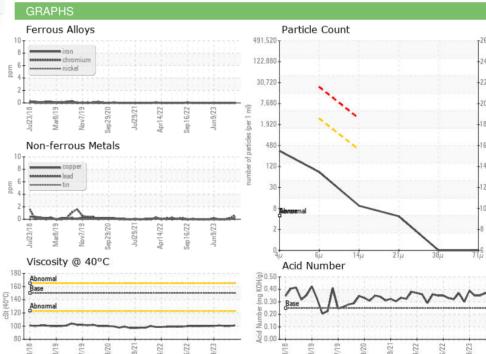



Certificate L2367

Laboratory Sample No.

Lab Number **Unique Number** Test Package : IND 2 (Additional Tests: PrtCount)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : HLC0002586 : 06006308 : 10740070

Received Diagnosed

: 13 Nov 2023 : 14 Nov 2023

Diagnostician : Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

HILCORP EXPLORATION ALASKA - MILNE POINT

1000 MILNE POINT RD PRUDOE BAY, AK US 99734

Contact: Evan Reilly evan.reilly@hilcorp.com

T: (907)670-3231 F: x: