


# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

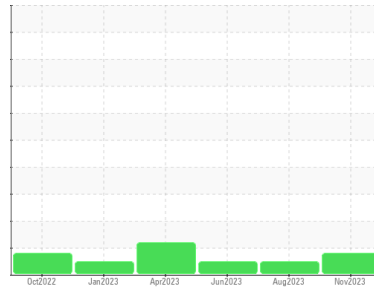

Machine Id  
**CATERPILLAR 980M 6141 (S/N KRS00885)**  
Component  
**Hydraulic System**  
Fluid  
**TULCO LUBSOIL SUPER HYDRAULIC HZ 46 (75 GAL)**

## DIAGNOSIS

### ▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO10002804</b>	TO10002473	TO10002368
Sample Date	Client Info		<b>02 Nov 2023</b>	22 Aug 2023	13 Jun 2023
Machine Age	hrs	Client Info	<b>12384</b>	11855	11371
Oil Age	hrs	Client Info	<b>11855</b>	2053	1569
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>ATTENTION</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	2	3
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >20	<1	<1	<1
Lead	ppm	ASTM D5185m >20	<1	0	0
Copper	ppm	ASTM D5185m >20	1	4	3
Tin	ppm	ASTM D5185m >20	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	2
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	168	134	136
Calcium	ppm	ASTM D5185m	452	797	780
Phosphorus	ppm	ASTM D5185m	761	816	849
Zinc	ppm	ASTM D5185m	886	991	1047
Sulfur	ppm	ASTM D5185m	2717	3589	3866

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	3	3
Sodium	ppm	ASTM D5185m	2	4	2
Potassium	ppm	ASTM D5185m >20	0	0	1
Water	%	ASTM D6304 >0.05	0.025	---	---
ppm Water	ppm	ASTM D6304 >500	253.3	---	---

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 5279	3673	2779
Particles >6µm	ASTM D7647	>1300	319	478	543
Particles >14µm	ASTM D7647	>160	14	27	20
Particles >21µm	ASTM D7647	>40	3	7	5
Particles >38µm	ASTM D7647	>10	0	0	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 20/15/11	19/16/12	19/16/11

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.68	1.05	1.09

# OIL ANALYSIS REPORT


## Particle Trend

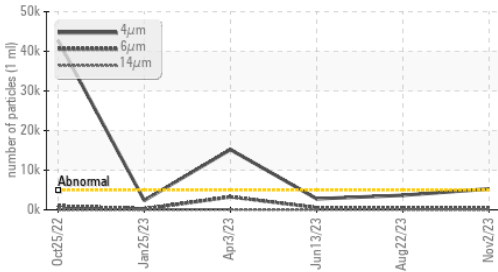


## Water (KF)

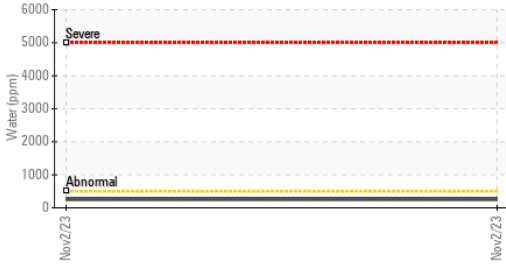


## Viscosity @ 100°C

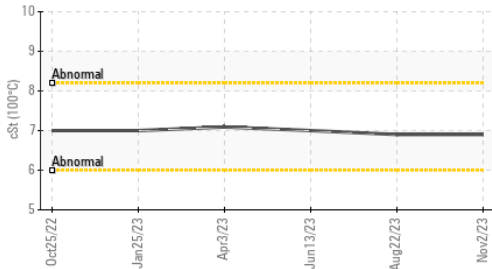

## Water (KF)

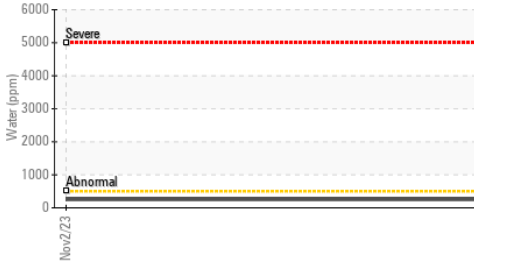


## Viscosity @ 100°C

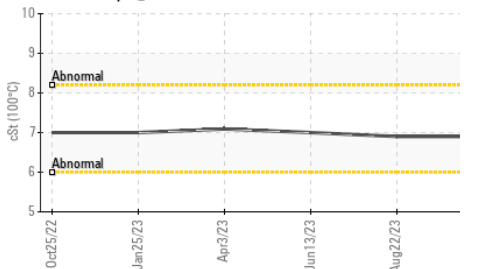

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.2	45.5	45.0
Visc @ 100°C	cSt	ASTM D445	6.9	6.9	7
Viscosity Index (VI)	Scale	ASTM D2270	104	107	113

## SAMPLE IMAGES

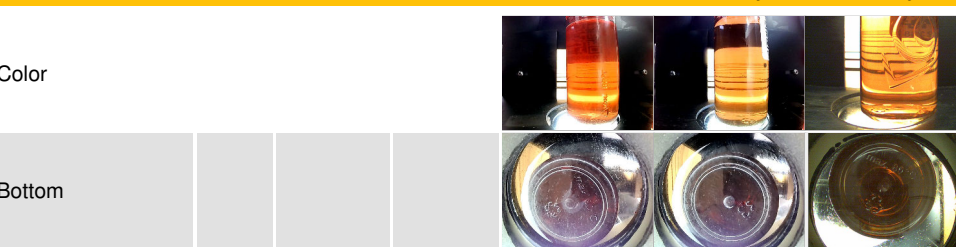


## GRAPHS


### Ferrous Alloys

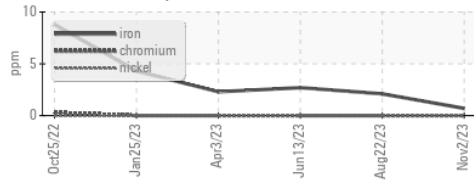


### Non-ferrous Metals

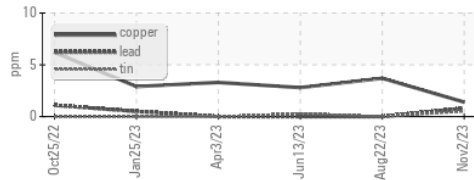


### Viscosity @ 40°C

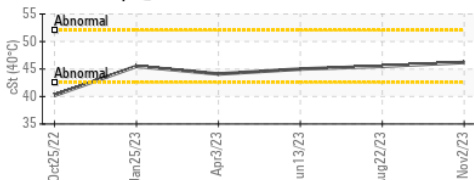

### Particle Count

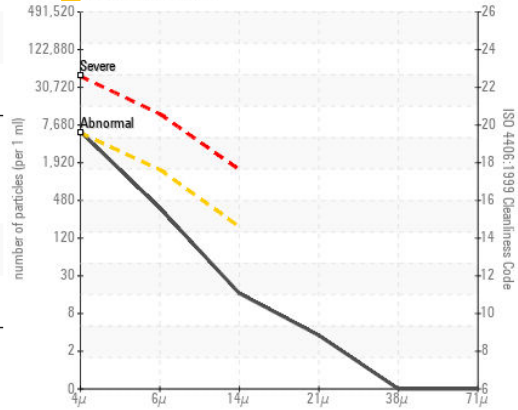

### Acid Number

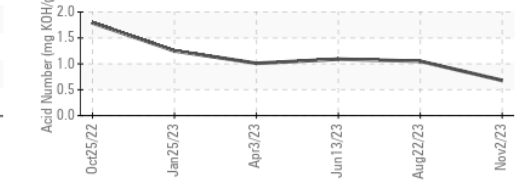

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO10002804 **Received** : 13 Nov 2023  
**Lab Number** : 06006321 **Diagnosed** : 14 Nov 2023  
**Unique Number** : 10740083 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**ANCHOR STONE TULSA ROCK**  
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE  
 TULSA, OK  
 US 74137

Contact: MIKE SNYDER  
 msnyder@anchorstoneco.com

T: (417)850-9635

F: