


KAESER COMPRESSORS Built for a lifetime."

KAESER 7352439

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

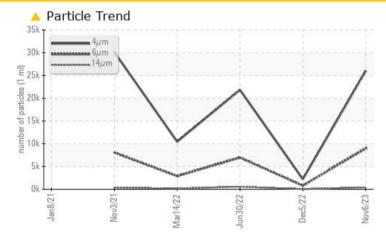

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Sample Rating Trend ISO

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	NORMAL	ABNORMAL		
Particles >6µm	ASTM D7647	>1300	<u> </u>	795	▲ 6969		
Particles >14µm	ASTM D7647	>80	🔺 404	36	▲ 562		
Particles >21µm	ASTM D7647	>20	<mark>/</mark> 94	5	1 43		
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 22/20/16	18/17/12	<u> </u>		

Customer Id: AMAKER Sample No.: KCPA009799 Lab Number: 06006341 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

05 Dec 2022 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

30 Jun 2022 Diag: Don Baldridge

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

14 Mar 2022 Diag: Jonathan Hester



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

KAESER 7352439

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

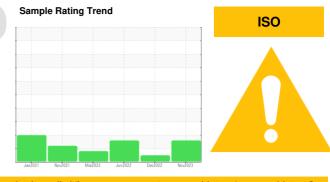



SAMPLE INFORM	/IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009799	KCP49863	KCP40190
Sample Date		Client Info		06 Nov 2023	05 Dec 2022	30 Jun 2022
Machine Age	hrs	Client Info		7022	4337	4017
Oil Age	hrs	Client Info		0	800	300
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m		2	1	3
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	18	52	50
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	75	87	79
Calcium	ppm	ASTM D5185m	0	0	2	2
Phosphorus	ppm	ASTM D5185m	0	<1	8	0
Zinc	ppm	ASTM D5185m	0	0	4	4
Sulfur	ppm	ASTM D5185m	23500	19516	23632	22795
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	1	<1
Sodium	ppm	ASTM D5185m		18	9	15
Potassium	ppm	ASTM D5185m	>20	6	9	7
Water	%	ASTM D6304	>0.05	0.023	0.017	0.031
ppm Water	ppm	ASTM D6304	>500	231.0	177.6	316.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		26012	2222	21819
Particles >6µm		ASTM D7647	>1300	<u> </u>	795	▲ 6969
Particles >14µm		ASTM D7647	>80	404	36	▲ 562
Particles >21µm		ASTM D7647	>20	<u> </u>	5	1 43
Particles >38µm		ASTM D7647	>4	2	0	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	22/20/16	18/17/12	▲ 22/20/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.29	0.37	0.35


Page 3 of 4




OIL ANALYSIS REPORT

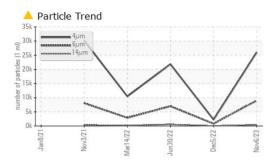

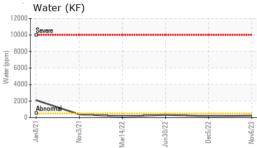


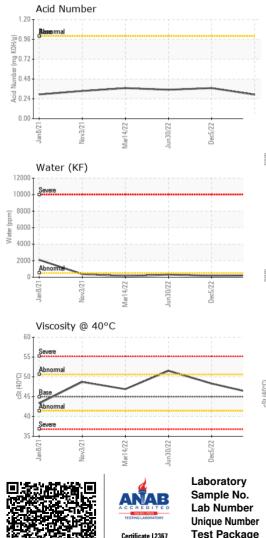

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.8	48.3	51.5
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						



Bottom

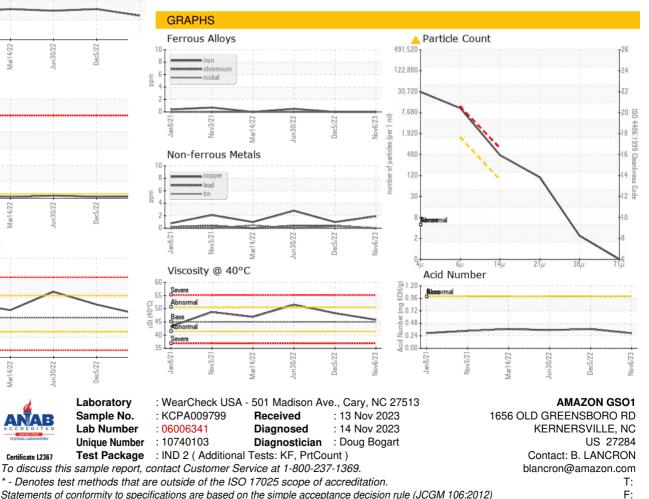

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: B. LANCRON - AMAKER