




# PROBLEM SUMMARY


Sample Rating Trend

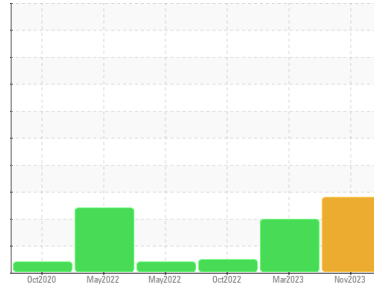

Machine Id  
**DS1**  
 Component  
**Hydraulic System**  
 Fluid  
**HOUGHTON HOUGHTON SAFE 419 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

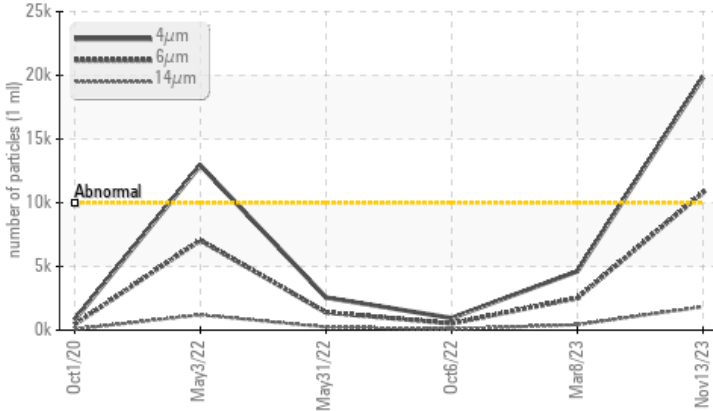

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	ATTENTION	NORMAL
Particles >4µm	ASTM D7647	>10000	▲ <b>19835</b>	4619	948
Particles >6µm	ASTM D7647	>2500	▲ <b>10805</b>	▲ 2517	517
Particles >14µm	ASTM D7647	>320	▲ <b>1839</b>	▲ 428	88
Particles >21µm	ASTM D7647	>80	▲ <b>619</b>	▲ 144	30
Particles >38µm	ASTM D7647	>20	▲ <b>96</b>	▲ 22	5
Particles >71µm	ASTM D7647	>4	▲ <b>10</b>	2	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ <b>21/21/18</b>	▲ 19/19/16	17/16/14

Customer Id: TYSHOP  
 Sample No.: USP0003454  
 Lab Number: 06006387  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS

### 08 Mar 2023 Diag: Doug Bogart

ISO



Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The pH level of this fluid is within the acceptable limits at 7.0. The condition of the oil is acceptable for the time in service.

view report



### 06 Oct 2022 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The pH level of this fluid is within the acceptable limits at 7.0. The condition of the oil is acceptable for the time in service.

view report



### 31 May 2022 Diag: Doug Bogart

PH



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The pH is low at 6.0. The condition of the oil is acceptable for the time in service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

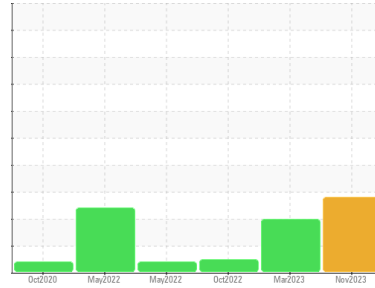

ISO



Machine Id

**DS1**

Component

**Hydraulic System**

Fluid

**HOUGHTON HOUGHTON SAFE 419 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The pH level of this fluid is within the acceptable limits. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>USP0003454</b>	USP05787399	USP234547
Sample Date	Client Info		<b>13 Nov 2023</b>	08 Mar 2023	06 Oct 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ATTENTION	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	3
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	2	2
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m	<b>0</b>	<1	0
Phosphorus	ppm	ASTM D5185m	<b>8</b>	5	10
Zinc	ppm	ASTM D5185m	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	<b>0</b>	0	14


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>0</b>	4	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	15	10
Water	%	ASTM D6304 >44	<b>34.5</b>	35.6	31.4
ppm Water	ppm	ASTM D6304	<b>345000</b>	356000	314000


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ <b>19835</b>	4619	948
Particles >6µm	ASTM D7647	>2500	▲ <b>10805</b>	▲ 2517	517
Particles >14µm	ASTM D7647	>320	▲ <b>1839</b>	▲ 428	88
Particles >21µm	ASTM D7647	>80	▲ <b>619</b>	▲ 144	30
Particles >38µm	ASTM D7647	>20	▲ <b>96</b>	▲ 22	5
Particles >71µm	ASTM D7647	>4	▲ <b>10</b>	2	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ <b>21/21/18</b>	▲ 19/19/16	17/16/14


### Particle Trend

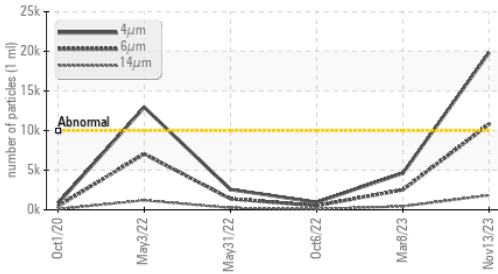


### Water (KF)

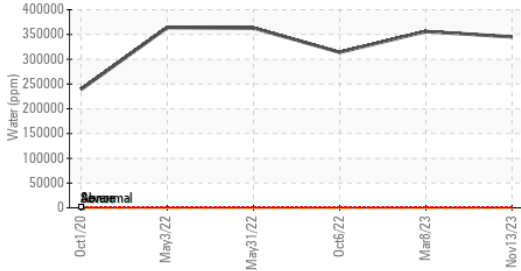


### Reserve Alkalinity

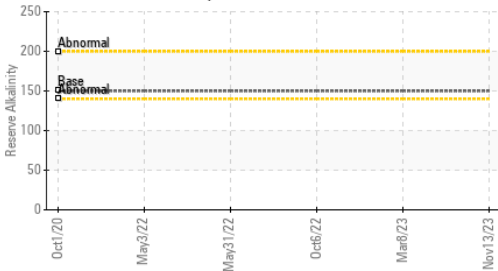

### Viscosity @ 40°C

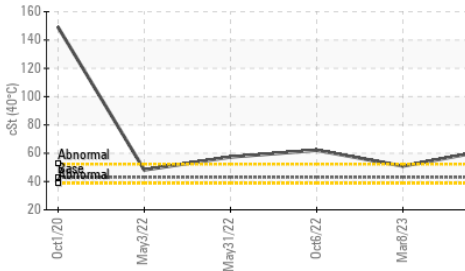


### Reserve Alkalinity

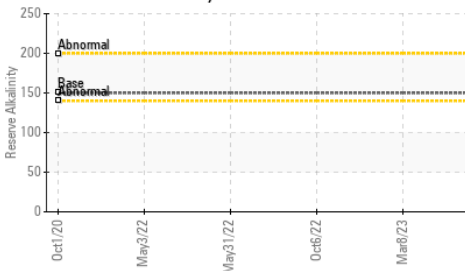

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>44	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
pH	Scale 0-14	ASTM D1287	8.00	7.00	7.00
Visc @ 40°C	cSt	ASTM D445	43.0	62.13	50.9

### SAMPLE IMAGES

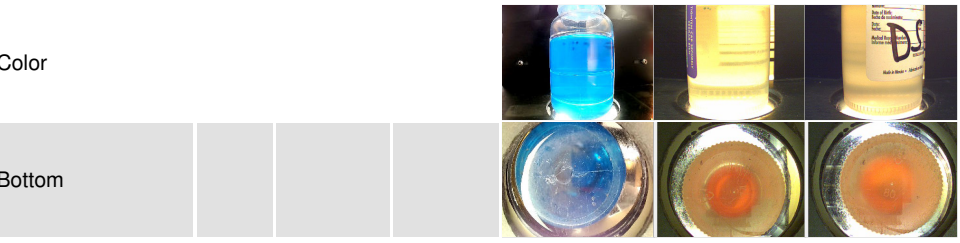


### GRAPHS


#### Ferrous Alloys

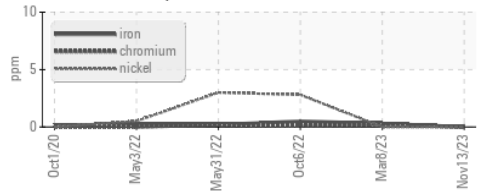


#### Non-ferrous Metals

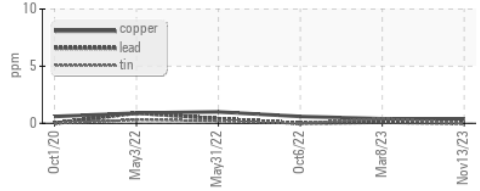

#### Viscosity @ 40°C

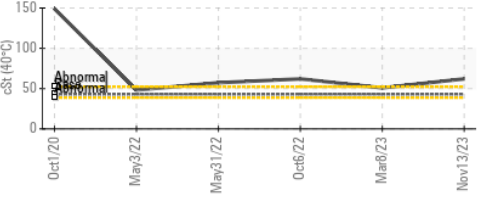

#### Particle Count

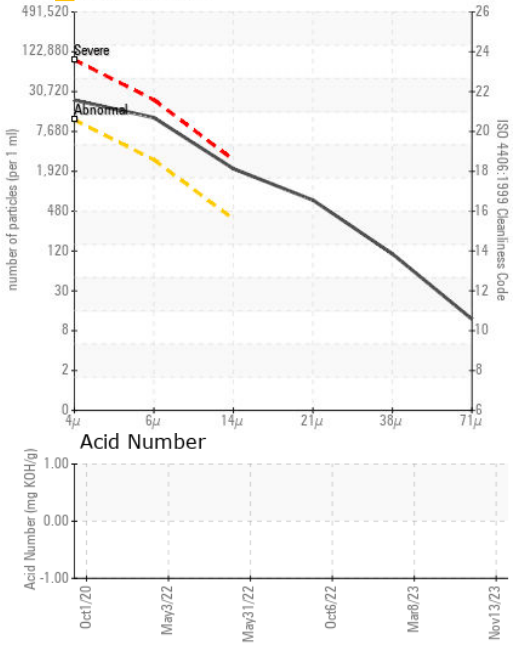

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0003454 **Received** : 13 Nov 2023  
**Lab Number** : 06006387 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10740149 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: pH, ReserveAlk )

**TYSON-HOPE-USP**  
 HOPE, AR  
 US  
 Contact: JAMES WEST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: