

# **OIL ANALYSIS REPORT**

# NORTH NORTH LS-2 (S/N AB10759)

**Refrigeration Compressor** 

**REFRIG COMP OIL ISO 68 (257 GAL)** 

Sample Rating Trend



### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

OAMBLE WEST	4 A T I COLO	1g2015 Aug20		ec2019 Apr2021 Dec2021 Aug202		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003465	USP248337	USP244227
Sample Date		Client Info		13 Nov 2023	07 Aug 2023	09 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	<1
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	<1	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	5	0	1	<1
Calcium	ppm	ASTM D5185m	12	1	2	0
Phosphorus	ppm	ASTM D5185m	12	<1	0	1
Zinc	ppm	ASTM D5185m	12	0	0	0
Sulfur	ppm	ASTM D5185m	1000	0	0	4
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Sodium	ppm	ASTM D5185m		<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water	%	ASTM D6304	>0.01	0.001	0.005	0.007
ppm Water	ppm	ASTM D6304	>100	0.00	50.7	70.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	2470	9253	<u></u> 17219
Particles >6µm		ASTM D7647	>2500	597	1619	2013
Particles >14µm		ASTM D7647	>320	38	39	27
Particles >21µm		ASTM D7647	>80	8	5	3
Particles >38µm		ASTM D7647	>20	1	0	0
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/16/12	20/18/12	<u>▲</u> 21/18/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.10	0.031	0.015	0.014



## **OIL ANALYSIS REPORT**

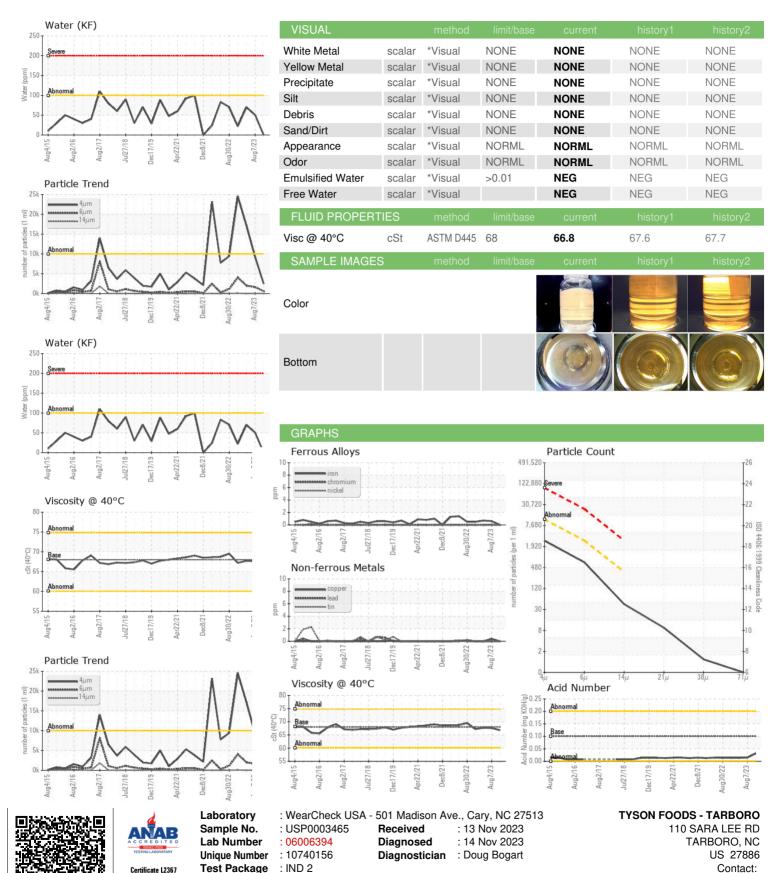

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: