




# PROBLEM SUMMARY

Sample Rating Trend

DIRT




Area  
**ROBERT C LOEDDING**  
 Machine Id  
**[ROBERT C LOEDDING] 003 508806-3**  
 Component  
**Starboard Main Engine**  
 Fluid  
**CHEVRON DELO 710 LE (--- GAL)**

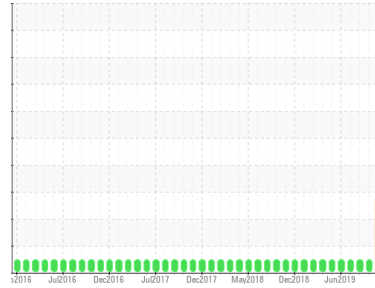


## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

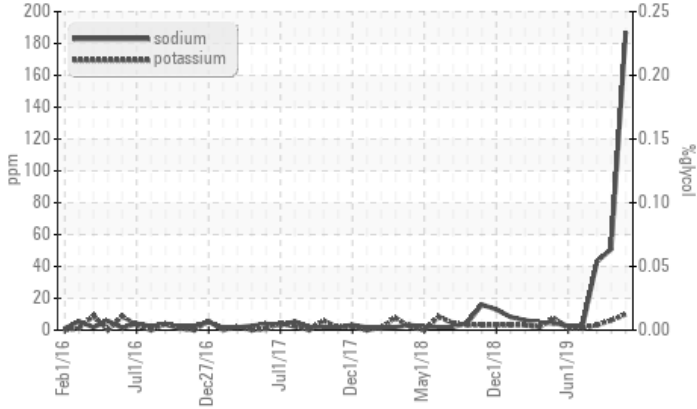

### ▲ Silicon (ppm)

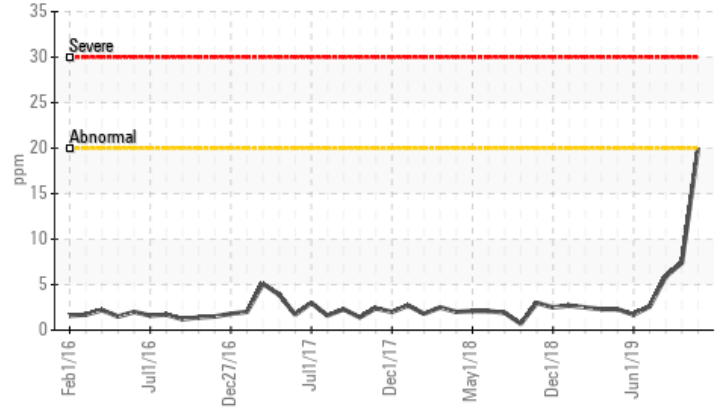

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

| Sample Status |     |             |     | <b>ABNORMAL</b> | NORMAL | NORMAL |
|---------------|-----|-------------|-----|-----------------|--------|--------|
| Silicon       | ppm | ASTM D5185m | >20 | <b>▲ 20</b>     | 7      | 6      |
| Sodium        | ppm | ASTM D5185m | >75 | <b>▲ 187</b>    | 51     | 43     |

Customer Id: INGPAD  
 Sample No.: MWM705577  
 Lab Number: 06006538  
 Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action              | Status | Date | Done By | Description  |
|---------------------|--------|------|---------|--|
| Resample            | ---    | ---  | ?       | We recommend an early resample to monitor this condition.    |
| Check Glycol Access | ---    | ---  | ?       | We advise that you check for the source of the coolant leak. |

## HISTORICAL DIAGNOSIS

### 01 Oct 2023 Diag: Angela Borella

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



### 01 Sep 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



### 01 Jul 2019 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

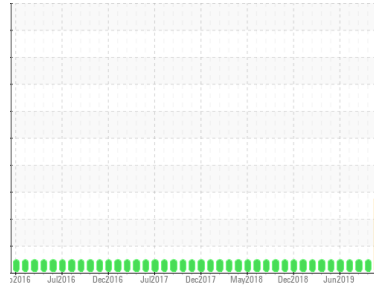

**DIRT**



Area  
**ROBERT C LOEDDING**  
 Machine Id  
**[ROBERT C LOEDDING] 003 508806-3**  
 Component  
**Starboard Main Engine**  
 Fluid  
**CHEVRON DELO 710 LE (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>MWM705577</b>   | MWM705580   | MWM705581   |
| Sample Date   | Client Info |             | <b>01 Nov 2023</b> | 01 Oct 2023 | 01 Sep 2023 |
| Machine Age   | hrs         | Client Info | <b>70669</b>       | 69955       | 69822       |
| Oil Age       | hrs         | Client Info | <b>70669</b>       | 0           | 69822       |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>ABNORMAL</b>    | NORMAL      | NORMAL      |

## CONTAMINATION

|      | method    | limit/base | current        | history1 | history2 |
|------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >4.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |

## WEAR METALS

|          | method | limit/base  | current | history1     | history2 |     |
|----------|--------|-------------|---------|--------------|----------|-----|
| Iron     | ppm    | ASTM D5185m | >75     | <b>28</b>    | 23       | 20  |
| Chromium | ppm    | ASTM D5185m | >8      | <b>&lt;1</b> | 1        | 1   |
| Nickel   | ppm    | ASTM D5185m | >2      | <b>0</b>     | <1       | 0   |
| Titanium | ppm    | ASTM D5185m | >3      | <b>0</b>     | 0        | <1  |
| Silver   | ppm    | ASTM D5185m | >2      | <b>0</b>     | 0        | 0   |
| Aluminum | ppm    | ASTM D5185m | >15     | <b>&lt;1</b> | 2        | 0   |
| Lead     | ppm    | ASTM D5185m | >18     | <b>13</b>    | 12       | 9   |
| Copper   | ppm    | ASTM D5185m | >80     | <b>17</b>    | 20       | 15  |
| Tin      | ppm    | ASTM D5185m | >14     | <b>3</b>     | 4        | 4   |
| Antimony | ppm    | ASTM D5185m |         | <b>---</b>   | ---      | --- |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0   |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | <1       | 0   |

## ADDITIVES

|            | method | limit/base  | current | history1     | history2 |      |
|------------|--------|-------------|---------|--------------|----------|------|
| Boron      | ppm    | ASTM D5185m |         | <b>64</b>    | 51       | 48   |
| Barium     | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185m |         | <b>44</b>    | 55       | 45   |
| Manganese  | ppm    | ASTM D5185m |         | <b>&lt;1</b> | <1       | <1   |
| Magnesium  | ppm    | ASTM D5185m |         | <b>18</b>    | 19       | 18   |
| Calcium    | ppm    | ASTM D5185m |         | <b>3302</b>  | 3906     | 3575 |
| Phosphorus | ppm    | ASTM D5185m |         | <b>14</b>    | 31       | 0    |
| Zinc       | ppm    | ASTM D5185m | 10      | <b>11</b>    | 4        | 4    |
| Sulfur     | ppm    | ASTM D5185m |         | <b>2478</b>  | 3621     | 2876 |

## CONTAMINANTS

|           | method | limit/base  | current | history1     | history2 |     |
|-----------|--------|-------------|---------|--------------|----------|-----|
| Silicon   | ppm    | ASTM D5185m | >20     | <b>▲ 20</b>  | 7        | 6   |
| Sodium    | ppm    | ASTM D5185m | >75     | <b>▲ 187</b> | 51       | 43  |
| Potassium | ppm    | ASTM D5185m | >20     | <b>10</b>    | 6        | 3   |
| Glycol    | %      | *ASTM D2982 |         | <b>NEG</b>   | NEG      | NEG |

## INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | *ASTM D7844 | >3      | <b>1.1</b>  | 1.1      | 1.1  |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>8.9</b>  | 8.4      | 8.5  |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>17.3</b> | 16.9     | 17.2 |


## FLUID DEGRADATION

|                  | method   | limit/base  | current | history1    | history2 |      |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>7.7</b>  | 7.6      | 7.6  |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.2     | <b>9.27</b> | 9.30     | 9.20 |




# OIL ANALYSIS REPORT


## ▲ Silicon (ppm)

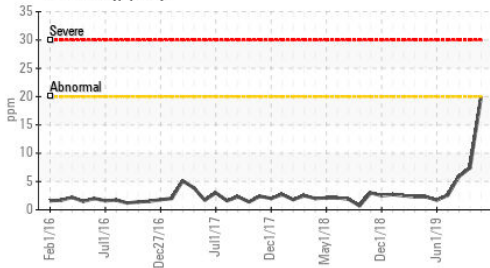


## Glycol Contamination

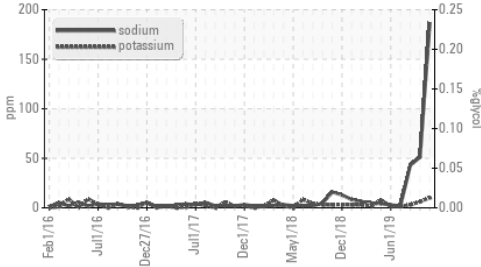

## Viscosity @ 100°C

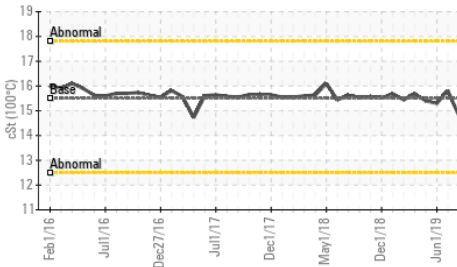

## Glycol Contamination

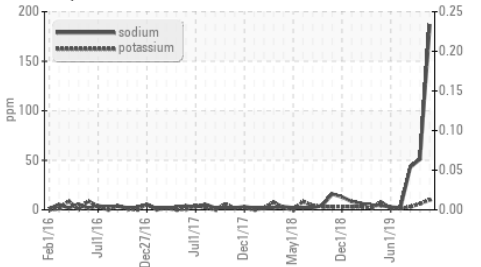


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |      |
|------------------|--------|------------|---------|----------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.5    | 14.6     | 14.7     | 14.8 |

## GRAPHS


### Ferrous Alloys

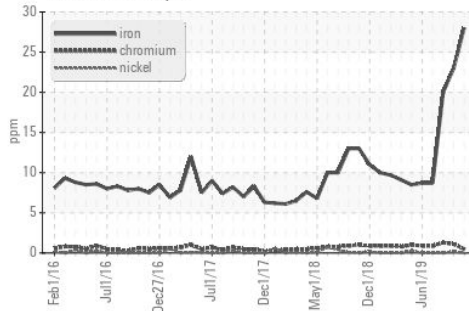


### Non-ferrous Metals

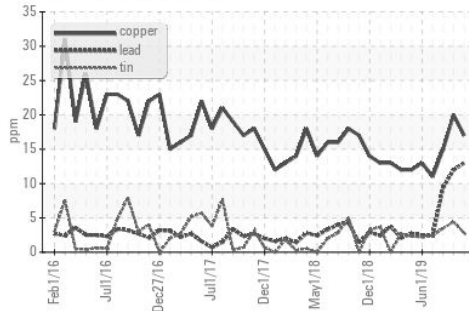

### Viscosity @ 100°C

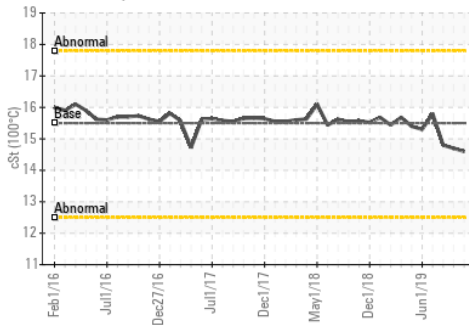

### Base Number

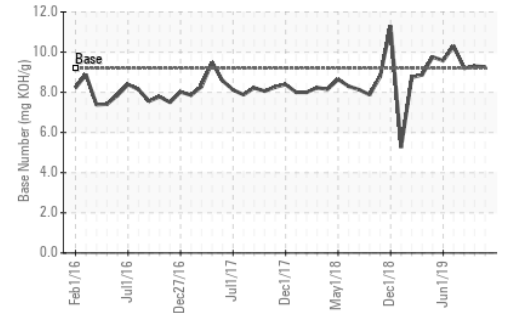

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : MWM705577 Received : 13 Nov 2023  
 Lab Number : 06006538 Diagnosed : 16 Nov 2023  
 Unique Number : 10740300 Diagnostician : Jonathan Hester  
 Test Package : MAR 2 ( Additional Tests: Glycol )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

## INGRAM BARGE

900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: ANTHONY VAN CURA  
 anthony.vancura@ingrambarga.com

T: (270)415-4467  
 F: (615)695-3697