




# OIL ANALYSIS REPORT



Area  
**Bridgewater**  
Machine Id  
**CATERPILLAR 5642**  
Component  
**Diesel Engine**  
Fluid  
**SHELL ROTELLA T 15W40 (--- QTS)**

Sample Rating Trend

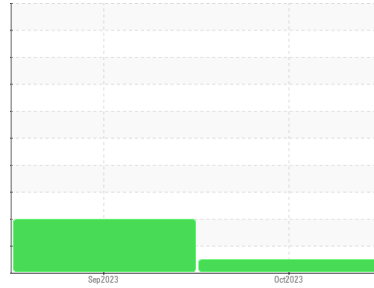

**NORMAL**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0850670</b>	WC0850645	---
Sample Date	Client Info		<b>25 Oct 2023</b>	14 Sep 2023	---
Machine Age	hrs	Client Info	<b>2023</b>	1072	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	0.6	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>22</b>	72	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	6	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	2	---
Copper	ppm	ASTM D5185m >330	<b>24</b>	155	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	4	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 316	<b>7</b>	33	---
Barium	ppm	ASTM D5185m 0.0	<b>7</b>	2	---
Molybdenum	ppm	ASTM D5185m 1.2	<b>61</b>	49	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m 24	<b>822</b>	617	---
Calcium	ppm	ASTM D5185m 2292	<b>1242</b>	1929	---
Phosphorus	ppm	ASTM D5185m 1064	<b>1030</b>	1234	---
Zinc	ppm	ASTM D5185m 1160	<b>1181</b>	1357	---
Sulfur	ppm	ASTM D5185m 4996	<b>3524</b>	3846	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	▲ 55	---
Sodium	ppm	ASTM D5185m	<b>0</b>	6	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.0</b>	8.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.9</b>	23.7	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.7</b>	20.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.1	<b>9.2</b>	9.6	---











# OIL ANALYSIS REPORT

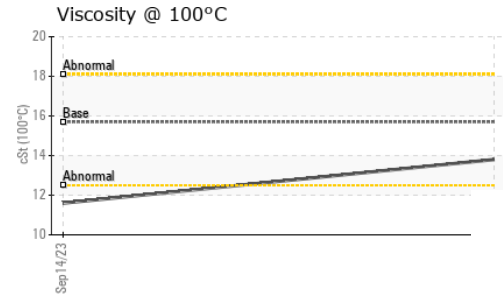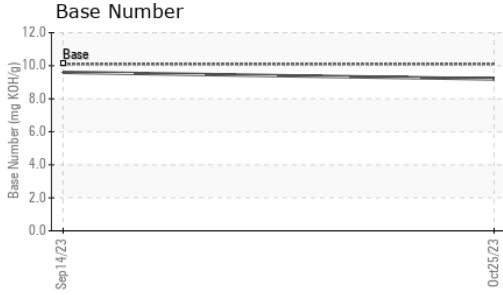

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.7	13.8	▲ 11.6

## GRAPHS

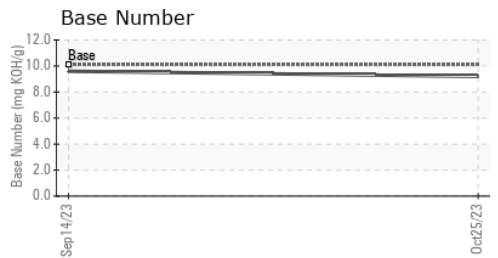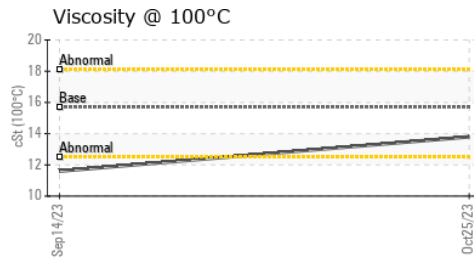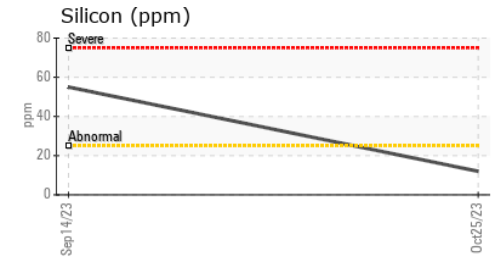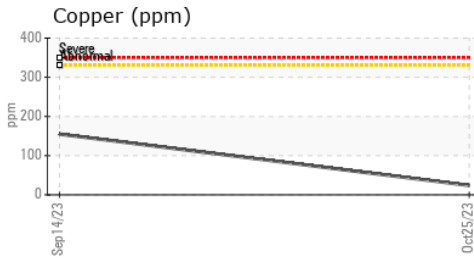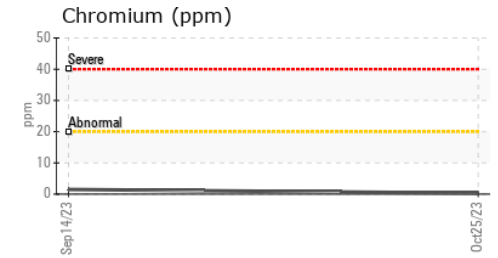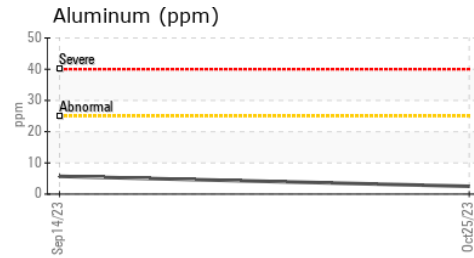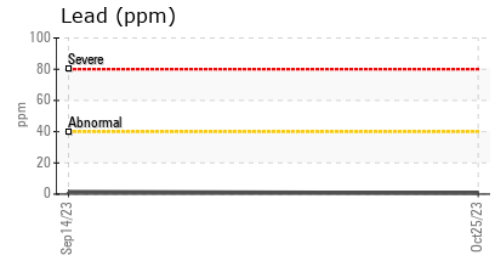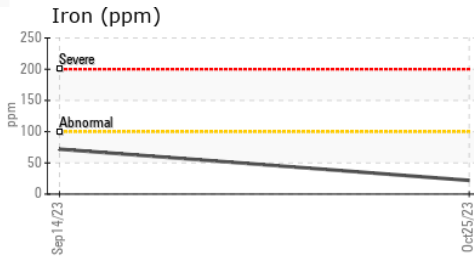

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0850670 **Received** : 14 Nov 2023  
**Lab Number** : 06006739 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10740501 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**INTERSTATE WASTE-BRIDGewater**  
 15 POLHEMUS LANE  
 BRIDGEWATER, NJ  
 US 08807  
 Contact: PABLO CHARDON  
 PChardon@interstatewaste.com  
 T: (609)366-7431  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)