




# OIL ANALYSIS REPORT

Area  
**Bernardsville**  
Machine Id  
**MACK 6764**  
Component  
**Diesel Engine**  
Fluid  
**GIBRALTAR 15W/40 SUPER S-3 LX (--- GAL)**

## Sample Rating Trend

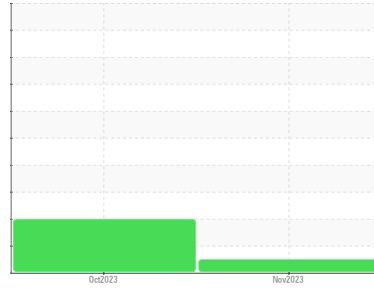

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0864849</b>	WC0864907	---
Sample Date	Client Info		<b>06 Nov 2023</b>	13 Oct 2023	---
Machine Age	hrs	Client Info	<b>688</b>	500	---
Oil Age	hrs	Client Info	<b>0</b>	500	---
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	0.2	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>10</b>	47	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >5	<b>1</b>	5	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	4	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	1	---
Copper	ppm	ASTM D5185m >330	<b>20</b>	136	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	3	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>46</b>	228	---
Barium	ppm	ASTM D5185m	<b>6</b>	0	---
Molybdenum	ppm	ASTM D5185m 66	<b>68</b>	117	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	4	---
Magnesium	ppm	ASTM D5185m 1000	<b>588</b>	646	---
Calcium	ppm	ASTM D5185m 1050	<b>1352</b>	1423	---
Phosphorus	ppm	ASTM D5185m 1150	<b>926</b>	653	---
Zinc	ppm	ASTM D5185m 1270	<b>1084</b>	818	---
Sulfur	ppm	ASTM D5185m	<b>3849</b>	2181	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	▲ 91	---
Sodium	ppm	ASTM D5185m	<b>0</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	11	---

### INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.7</b>	9.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	24.0	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.7</b>	22.0	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.1	<b>7.9</b>	7.7	---











# OIL ANALYSIS REPORT

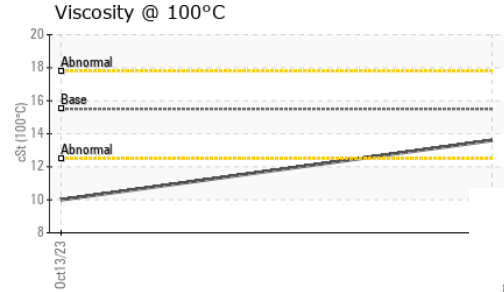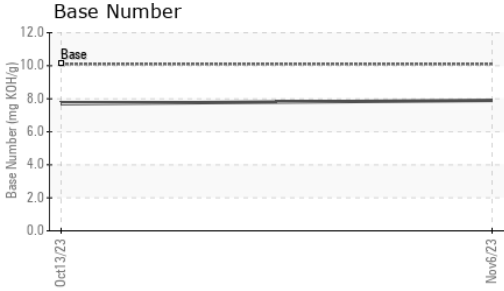

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	13.6	▲ 10.0

## GRAPHS

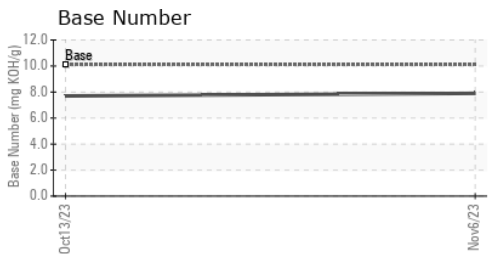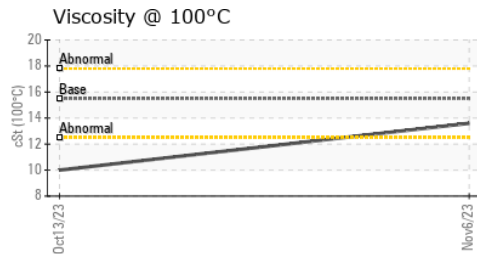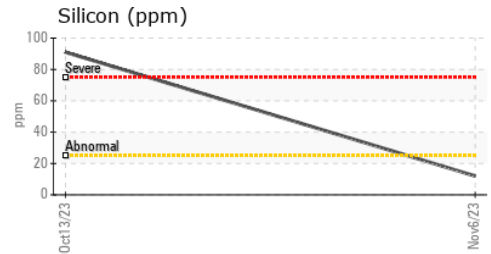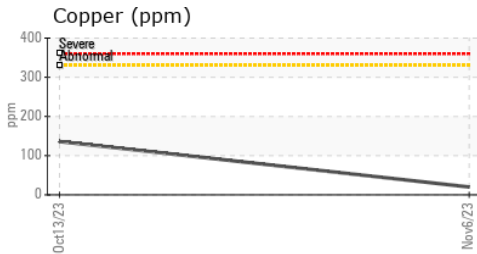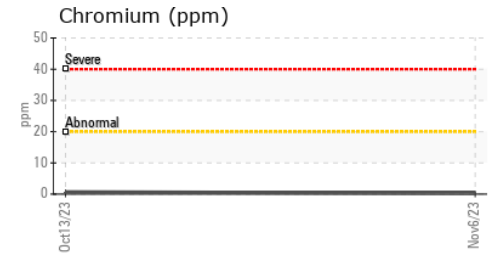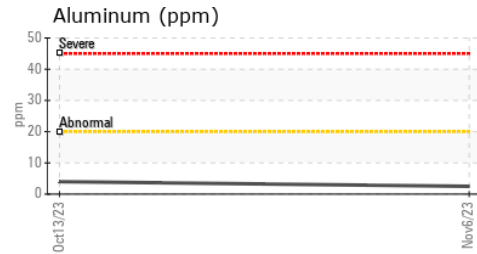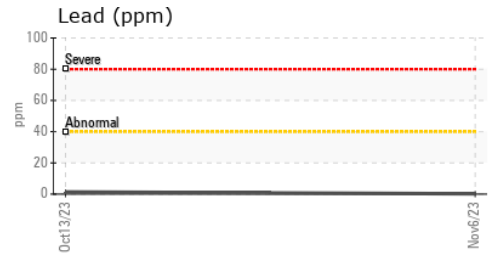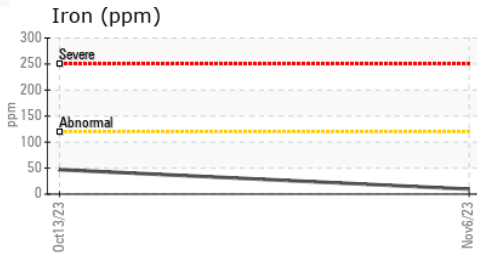

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0864849 **Received** : 14 Nov 2023  
**Lab Number** : 06006740 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10740502 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**INTERSTATE WASTE-BERNARDSVILLE**  
 33 OLD QUARRY ROAD  
 BERNARDSVILLE, NJ  
 US 07924  
 Contact: Pablo Chardon  
 PChardon@interstatewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: