




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Area
Bridgewater
 Machine Id
CATERPILLAR 5148
 Component
Diesel Engine
 Fluid
GIBRALTAR 15W/40 SUPER S-3 LX (--- QTS)

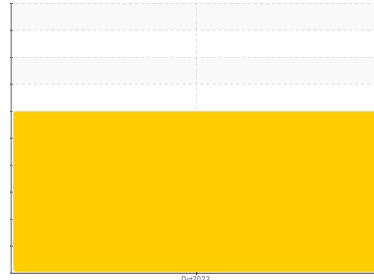

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Wear

The aluminum level is severe. Piston wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0850669	---	---
Sample Date	Client Info		20 Oct 2023	---	---
Machine Age	hrs	Client Info	12249	---	---
Oil Age	hrs	Client Info	339	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	37	---	---
Chromium	ppm	ASTM D5185m >20	4	---	---
Nickel	ppm	ASTM D5185m >2	3	---	---
Titanium	ppm	ASTM D5185m >2	0	---	---
Silver	ppm	ASTM D5185m >2	<1	---	---
Aluminum	ppm	ASTM D5185m >25	45	---	---
Lead	ppm	ASTM D5185m >40	<1	---	---
Copper	ppm	ASTM D5185m >330	2	---	---
Tin	ppm	ASTM D5185m >15	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3	---	---
Barium	ppm	ASTM D5185m	6	---	---
Molybdenum	ppm	ASTM D5185m 66	60	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m 1000	852	---	---
Calcium	ppm	ASTM D5185m 1050	1122	---	---
Phosphorus	ppm	ASTM D5185m 1150	937	---	---
Zinc	ppm	ASTM D5185m 1270	1143	---	---
Sulfur	ppm	ASTM D5185m	3290	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	10	---	---
Sodium	ppm	ASTM D5185m	0	---	---
Potassium	ppm	ASTM D5185m >20	2	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.8	---	---
Nitration	Abs/cm	*ASTM D7624 >20	7.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.2	---	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.1	8.8	---	---




OIL ANALYSIS REPORT

Aluminum (ppm)

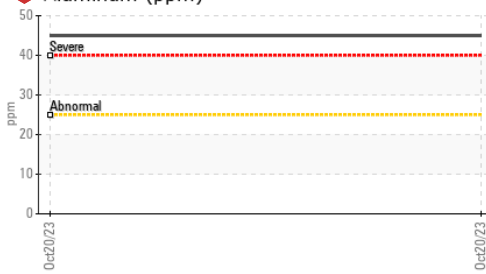

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	---	---
Precipitate	scalar	*Visual	NONE	---	---
Silt	scalar	*Visual	NONE	---	---
Debris	scalar	*Visual	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	---	---
Appearance	scalar	*Visual	NORML	---	---
Odor	scalar	*Visual	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	---	---
Free Water	scalar	*Visual	---	---	---


Base Number

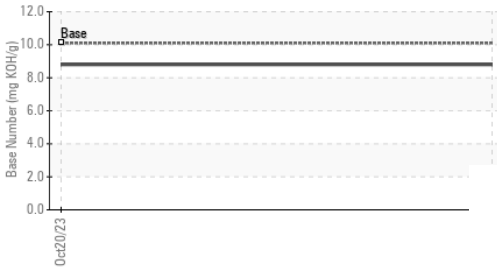


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	14.9	---

GRAPHS


Iron (ppm)

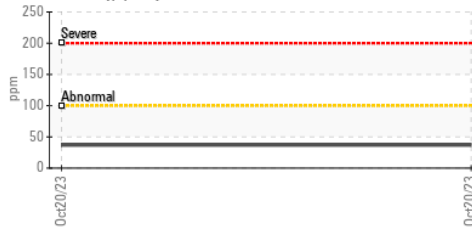


Lead (ppm)

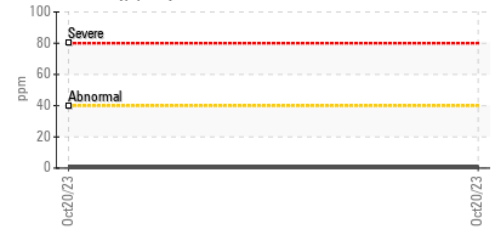

Viscosity @ 100°C

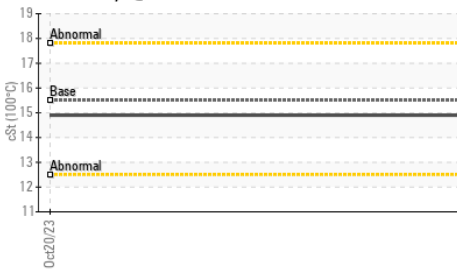


Aluminum (ppm)

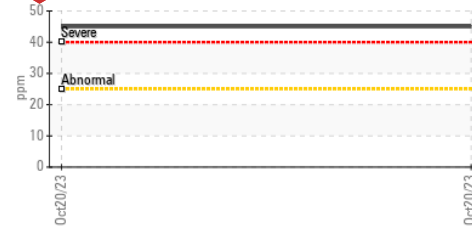


Chromium (ppm)




Copper (ppm)

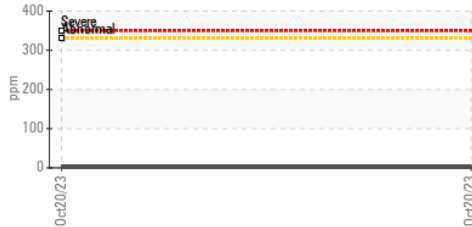


Silicon (ppm)

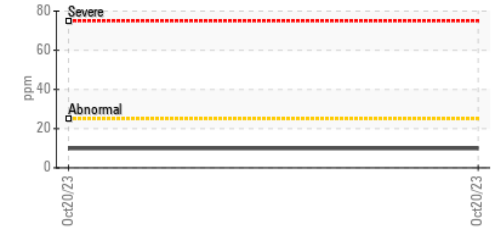

Viscosity @ 100°C

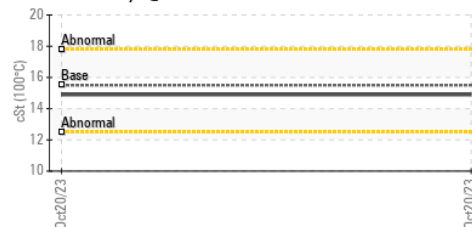

Base Number

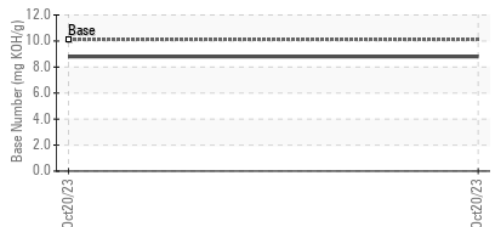

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0850669 **Received** : 14 Nov 2023
Lab Number : 06006752 **Diagnosed** : 16 Nov 2023
Unique Number : 10740514 **Diagnostician** : Jonathan Hester
Test Package : MOB 1 (Additional Tests: TBN)

INTERSTATE WASTE-BRIDGewater
 15 POLHEMUS LANE
 BRIDGEWATER, NJ
 US 08807
 Contact: PABLO CHARDON
 PChardon@interstatewaste.com
 T: (609)366-7431
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)