




# PROBLEM SUMMARY

Sample Rating Trend


ISO

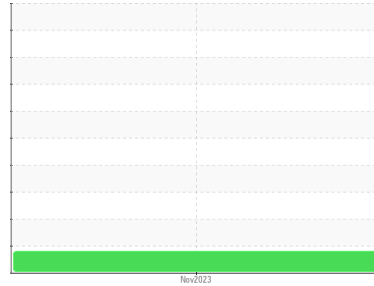

Machine Id  
**NOT GIVEN DJJ0018951**  
Component  
**Hydraulic System**  
Fluid  
**NOT GIVEN (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

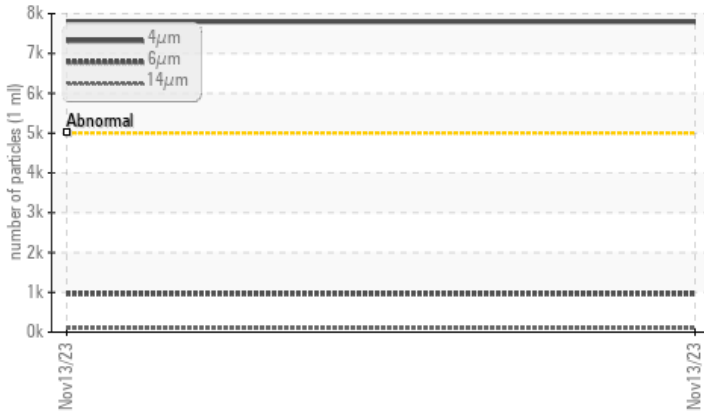

## RECOMMENDATION

No corrective action is recommended at this time.  
Resample at the next service interval to monitor.  
Please specify the brand, type, and viscosity of the oil on your next sample.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ATTENTION</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>7795</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>20/17/14</b>	---	---

Customer Id: GILHOU  
Sample No.: DJJ0018951  
Lab Number: 06006962  
Test Package: MOBCE



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**NOT GIVEN DJJ0018951**  
 Component  
**Hydraulic System**  
 Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>DJJ0018951</b>	---	---
Sample Date	Client Info	<b>13 Nov 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	<b>6</b>	---	---
Chromium ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel ppm	ASTM D5185m >10	<b>0</b>	---	---
Titanium ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum ppm	ASTM D5185m >10	<b>1</b>	---	---
Lead ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Copper ppm	ASTM D5185m >75	<b>&lt;1</b>	---	---
Tin ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	<b>0</b>	---	---
Barium ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Manganese ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium ppm	ASTM D5185m	<b>7</b>	---	---
Calcium ppm	ASTM D5185m	<b>62</b>	---	---
Phosphorus ppm	ASTM D5185m	<b>341</b>	---	---
Zinc ppm	ASTM D5185m	<b>424</b>	---	---
Sulfur ppm	ASTM D5185m	<b>2147</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >20	<b>4</b>	---	---
Sodium ppm	ASTM D5185m	<b>1</b>	---	---
Potassium ppm	ASTM D5185m >20	<b>1</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 7795</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>961</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>96</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>42</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>5</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 20/17/14</b>	---	---


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	<b>0.30</b>	---	---




# OIL ANALYSIS REPORT


### ▲ Particle Trend

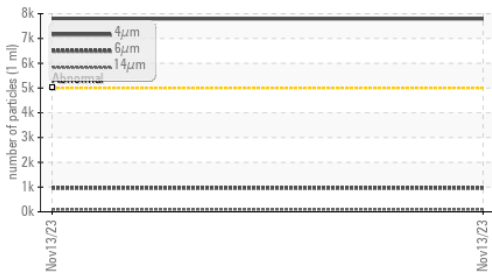


### ▲ Particle Trend

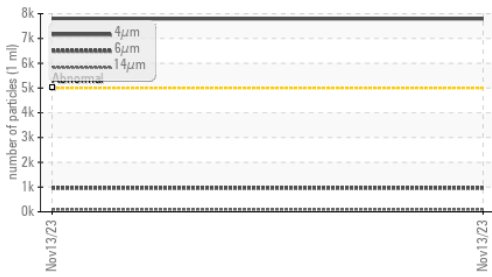

### Acid Number

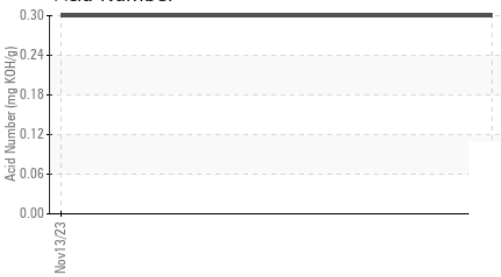

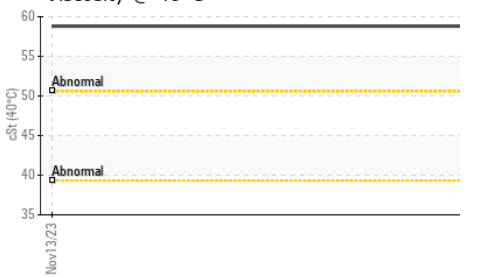

### Viscosity @ 40°C








VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	58.8	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

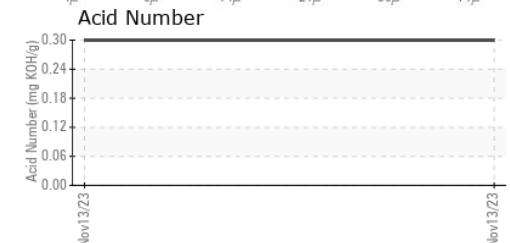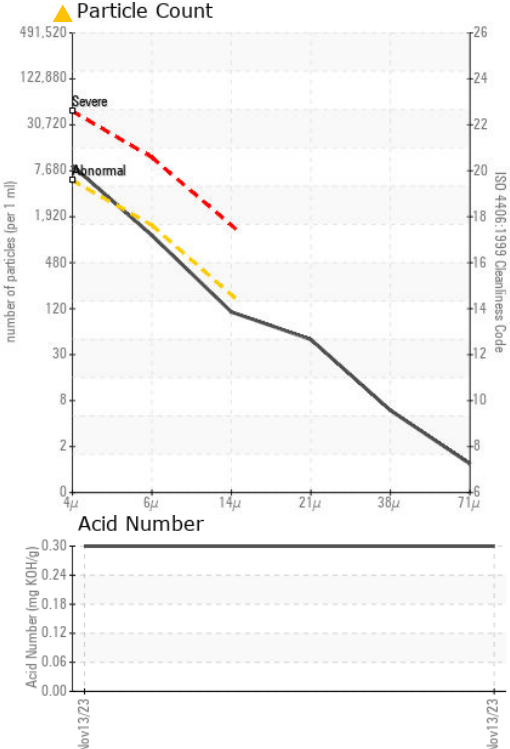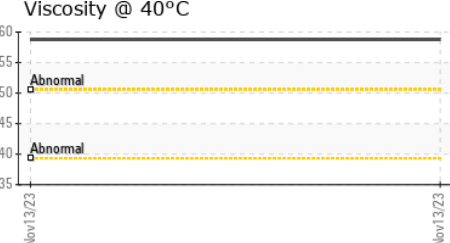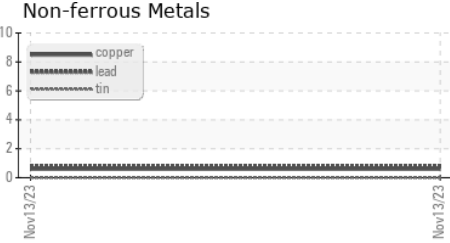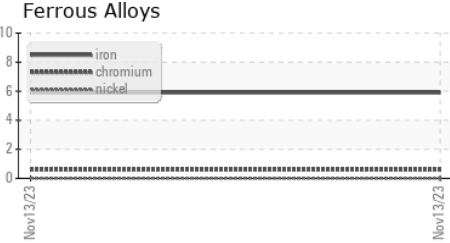

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DJJ0018951 **Received** : 14 Nov 2023  
**Lab Number** : 06006962 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10740724 **Diagnostician** : Don Baldrige  
**Test Package** : MOBCE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**GILLS HEAVY EQUIPMENT**  
 6431 BINGLE RD  
 HOUSTON, TX  
 US 77092  
 Contact: BARBARA GRIMES  
 barb@gilshheavyequip.com  
 T: (713)462-3325  
 F: