



# PROBLEM SUMMARY

Sample Rating Trend


ISO

Area  
**L1**  
 Machine Id  
**SEW EURODRIVE L1 BLANCHER 1 LIFT WHEEL**  
 Component  
**Gearbox**  
 Fluid  
**LUBRIPLATE FMO 1100 AW ISO 220 (--- GAL)**



## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

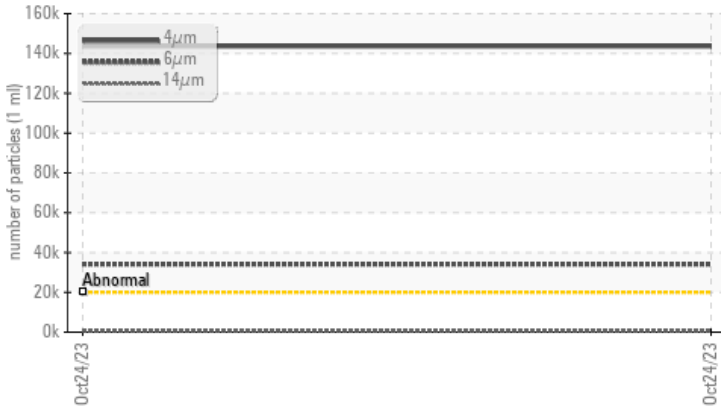

## RECOMMENDATION

Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |           | <b>ABNORMAL</b>   | --- | --- |
|-----------------|--------------|-----------|-------------------|-----|-----|
| Particles >4µm  | ASTM D7647   | >20000    | ▲ <b>143646</b>   | --- | --- |
| Particles >6µm  | ASTM D7647   | >5000     | ▲ <b>34138</b>    | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | ▲ <b>24/22/16</b> | --- | --- |

Customer Id: JRSGRA  
 Sample No.: USP249757  
 Lab Number: 06006995  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area  
**L1**  
Machine Id  
**SEW EURODRIVE L1 BLANCHER 1 LIFT WHEEL**  
Component  
**Gearbox**  
Fluid  
**LUBRIPLATE FMO 1100 AW ISO 220 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info     | <b>USP249757</b>   | ---      | ---      |
| Sample Date   | Client Info     | <b>24 Oct 2023</b> | ---      | ---      |
| Machine Age   | hrs Client Info | <b>0</b>           | ---      | ---      |
| Oil Age       | hrs Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info     | <b>N/A</b>         | ---      | ---      |
| Sample Status |                 | <b>ABNORMAL</b>    | ---      | ---      |

## WEAR METALS

| method                   | limit/base | current      | history1 | history2 |
|--------------------------|------------|--------------|----------|----------|
| Iron ppm ASTM D5185m     | >200       | <b>54</b>    | ---      | ---      |
| Chromium ppm ASTM D5185m | >15        | <b>&lt;1</b> | ---      | ---      |
| Nickel ppm ASTM D5185m   | >15        | <b>&lt;1</b> | ---      | ---      |
| Titanium ppm ASTM D5185m |            | <b>&lt;1</b> | ---      | ---      |
| Silver ppm ASTM D5185m   |            | <b>0</b>     | ---      | ---      |
| Aluminum ppm ASTM D5185m | >25        | <b>1</b>     | ---      | ---      |
| Lead ppm ASTM D5185m     | >100       | <b>0</b>     | ---      | ---      |
| Copper ppm ASTM D5185m   | >200       | <b>&lt;1</b> | ---      | ---      |
| Tin ppm ASTM D5185m      | >25        | <b>0</b>     | ---      | ---      |
| Vanadium ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Cadmium ppm ASTM D5185m  |            | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method                     | limit/base | current      | history1 | history2 |
|----------------------------|------------|--------------|----------|----------|
| Boron ppm ASTM D5185m      |            | <b>16</b>    | ---      | ---      |
| Barium ppm ASTM D5185m     |            | <b>0</b>     | ---      | ---      |
| Molybdenum ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Manganese ppm ASTM D5185m  |            | <b>2</b>     | ---      | ---      |
| Magnesium ppm ASTM D5185m  |            | <b>2</b>     | ---      | ---      |
| Calcium ppm ASTM D5185m    |            | <b>357</b>   | ---      | ---      |
| Phosphorus ppm ASTM D5185m |            | <b>357</b>   | ---      | ---      |
| Zinc ppm ASTM D5185m       |            | <b>1</b>     | ---      | ---      |
| Sulfur ppm ASTM D5185m     |            | <b>12031</b> | ---      | ---      |

## CONTAMINANTS

| method                    | limit/base | current      | history1 | history2 |
|---------------------------|------------|--------------|----------|----------|
| Silicon ppm ASTM D5185m   | >50        | <b>2</b>     | ---      | ---      |
| Sodium ppm ASTM D5185m    |            | <b>2</b>     | ---      | ---      |
| Potassium ppm ASTM D5185m | >20        | <b>1</b>     | ---      | ---      |
| Water % ASTM D6304        | >0.2       | <b>0.011</b> | ---      | ---      |
| ppm Water ppm ASTM D6304  | >2000      | <b>114.1</b> | ---      | ---      |

## FLUID CLEANLINESS






| method                       | limit/base | current           | history1 | history2 |
|------------------------------|------------|-------------------|----------|----------|
| Particles >4µm ASTM D7647    | >20000     | <b>▲ 143646</b>   | ---      | ---      |
| Particles >6µm ASTM D7647    | >5000      | <b>▲ 34138</b>    | ---      | ---      |
| Particles >14µm ASTM D7647   | >640       | <b>621</b>        | ---      | ---      |
| Particles >21µm ASTM D7647   | >160       | <b>140</b>        | ---      | ---      |
| Particles >38µm ASTM D7647   | >40        | <b>2</b>          | ---      | ---      |
| Particles >71µm ASTM D7647   | >10        | <b>0</b>          | ---      | ---      |
| Oil Cleanliness ISO 4406 (c) | >21/19/16  | <b>▲ 24/22/16</b> | ---      | ---      |

## FLUID DEGRADATION

| method                               | limit/base | current     | history1 | history2 |
|--------------------------------------|------------|-------------|----------|----------|
| Acid Number (AN) mg KOH/g ASTM D8045 | 0.8        | <b>0.43</b> | ---      | ---      |



# OIL ANALYSIS REPORT

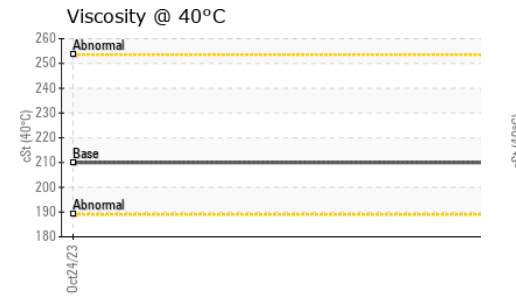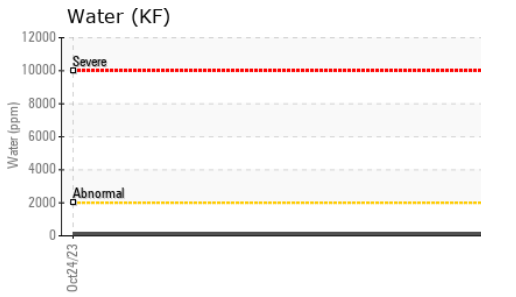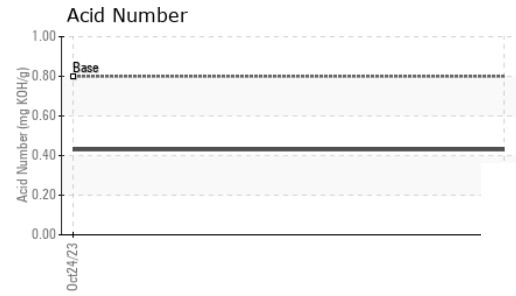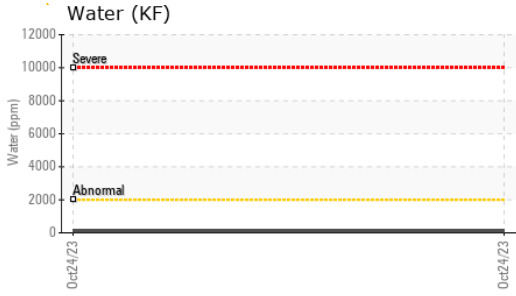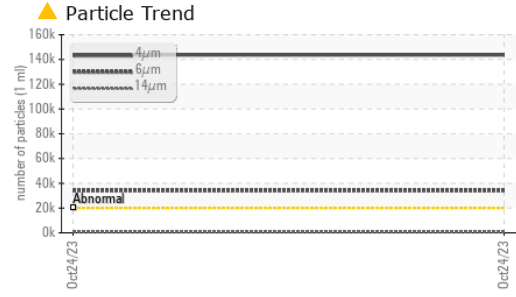






| VISUAL           | method | limit/base | current | history1     | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Debris           | scalar | *Visual    | NONE    | <b>LIGHT</b> | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | ---      |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | <b>NEG</b>   | ---      |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1   | history2 |
|------------------|--------|------------|---------|------------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 210     | <b>210</b> | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |  |  |  |          |          |
|--------|--|--|--|----------|----------|
| Color  |  |  |  | no image | no image |
| Bottom |  |  |  | no image | no image |

## GRAPHS

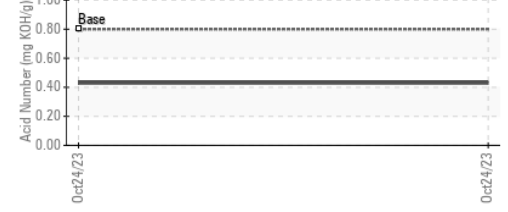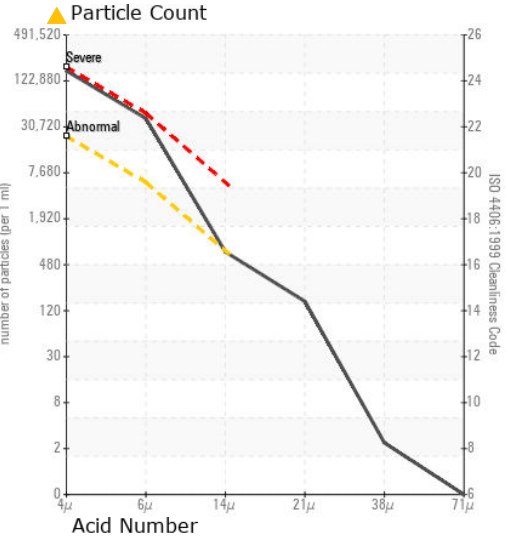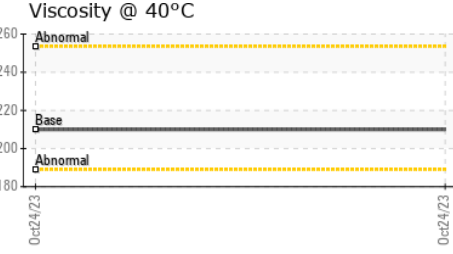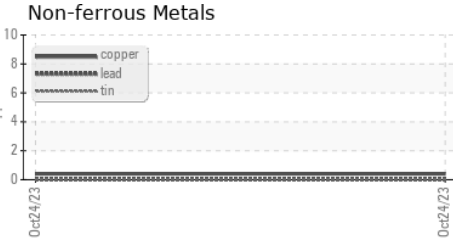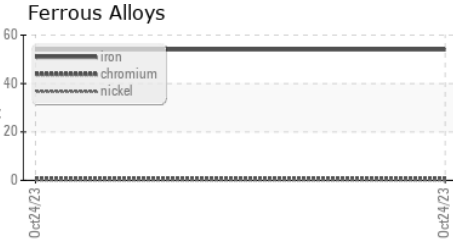

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP249757 **Received** : 14 Nov 2023  
**Lab Number** : 06006995 **Diagnosed** : 15 Nov 2023  
**Unique Number** : 10740757 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**JR SIMPLOT CO**  
 3630 GATEWAY DR.  
 GRAND FORKS, ND  
 US 58201  
 Contact: GREG HUDERLE  
 greg.huderle@simplot.com  
 T:  
 F: (701)780-7880

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)