




PROBLEM SUMMARY


Area
L1
 Machine Id
SEW EURODRIVE L1 BLANCHER 1
 Component
Auger
 Fluid
LUBRIPLATE FMO 1100 AW ISO 220 (--- GAL)

Sample Rating Trend

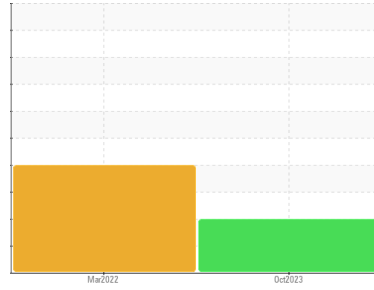

COMPONENT CONDITION SUMMARY

▲ Particle Trend

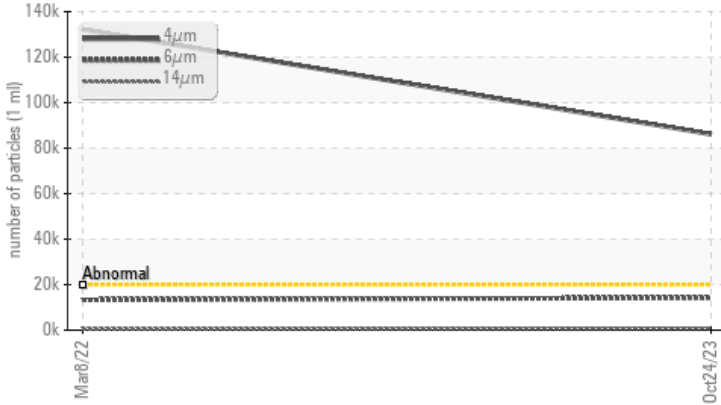

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	ABNORMAL	---
Particles >4µm	ASTM D7647	>20000	▲ 86117	▲ 132195	---
Particles >6µm	ASTM D7647	>5000	▲ 14215	▲ 13308	---
Particles >14µm	ASTM D7647	>640	▲ 822	364	---
Particles >21µm	ASTM D7647	>160	▲ 239	78	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/21/17	▲ 24/21/16	---

Customer Id: JRSGRA
 Sample No.: USP243996
 Lab Number: 06006996
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

HISTORICAL DIAGNOSIS

08 Mar 2022 Diag: Doug Bogart

WATER



We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. Free water present. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

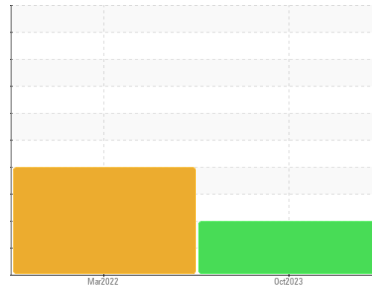

ISO



Area
L1
 Machine Id
SEW EURODRIVE L1 BLANCHER 1
 Component
Auger
 Fluid
LUBRIPLATE FMO 1100 AW ISO 220 (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USP243996	USP237823	---
Sample Date	Client Info	24 Oct 2023	08 Mar 2022	---
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	10	12
Chromium	ppm	ASTM D5185m >10	<1	0
Nickel	ppm	ASTM D5185m >10	0	0
Titanium	ppm	ASTM D5185m	<1	0
Silver	ppm	ASTM D5185m	0	<1
Aluminum	ppm	ASTM D5185m >25	1	<1
Lead	ppm	ASTM D5185m >100	0	0
Copper	ppm	ASTM D5185m >50	0	0
Tin	ppm	ASTM D5185m >10	0	<1
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	32	2
Barium	ppm	ASTM D5185m	0	0
Molybdenum	ppm	ASTM D5185m	2	<1
Manganese	ppm	ASTM D5185m	<1	<1
Magnesium	ppm	ASTM D5185m	1	0
Calcium	ppm	ASTM D5185m	9	4
Phosphorus	ppm	ASTM D5185m	324	190
Zinc	ppm	ASTM D5185m	13	0
Sulfur	ppm	ASTM D5185m	11615	1930

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	2	7
Sodium	ppm	ASTM D5185m	<1	0
Potassium	ppm	ASTM D5185m >20	5	<1
Water	%	ASTM D6304 >0.1	0.008	▲ 0.378
ppm Water	ppm	ASTM D6304 >1000	82.1	▲ 3780

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	▲ 86117	▲ 132195	---
Particles >6µm	ASTM D7647 >5000	▲ 14215	▲ 13308	---
Particles >14µm	ASTM D7647 >640	▲ 822	364	---
Particles >21µm	ASTM D7647 >160	▲ 239	78	---
Particles >38µm	ASTM D7647 >40	6	1	---
Particles >71µm	ASTM D7647 >10	0	0	---
Oil Cleanliness	ISO 4406 (c) >21/19/16	▲ 24/21/17	▲ 24/21/16	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.8	0.49	0.715




OIL ANALYSIS REPORT

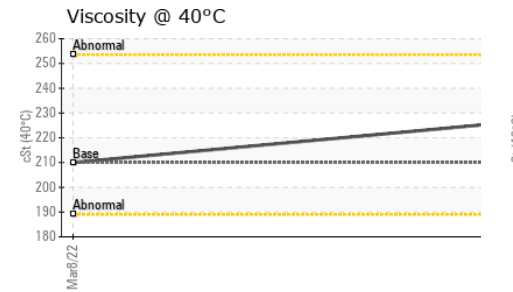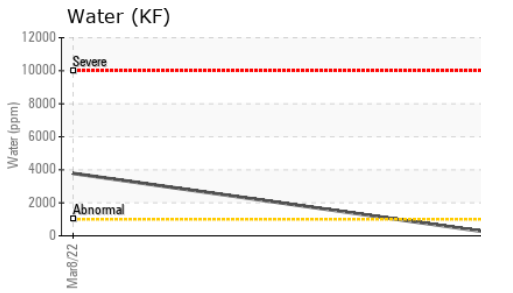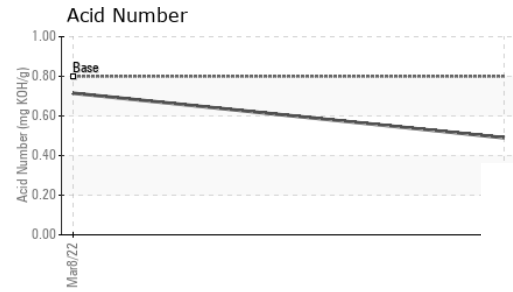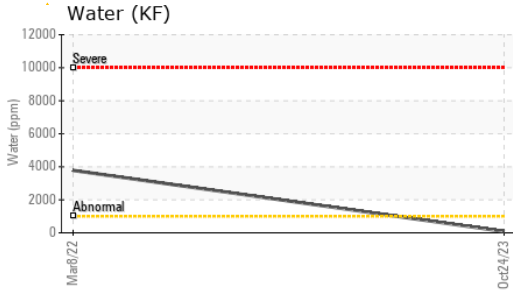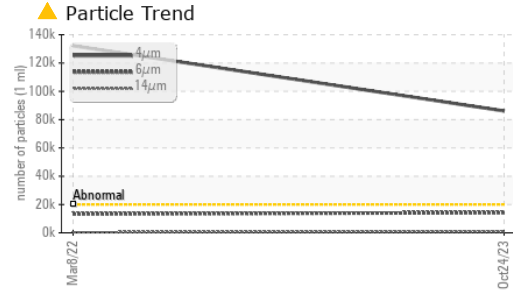






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	▲ 2.0

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	210	226	210

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

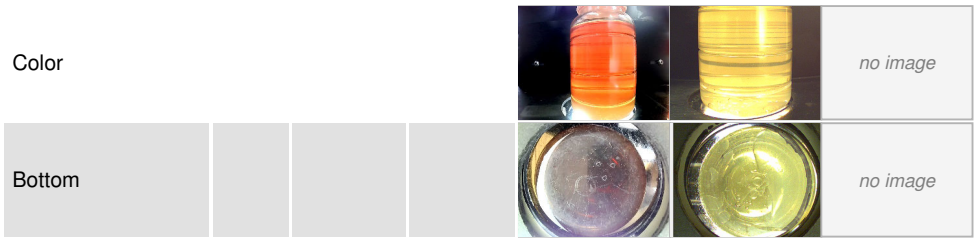

GRAPHS

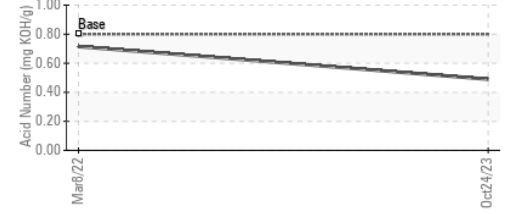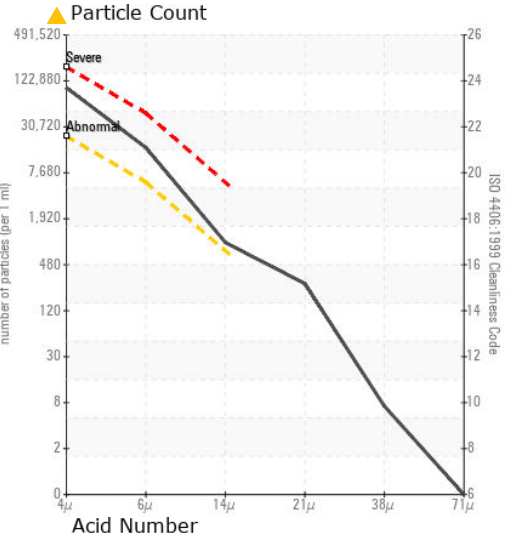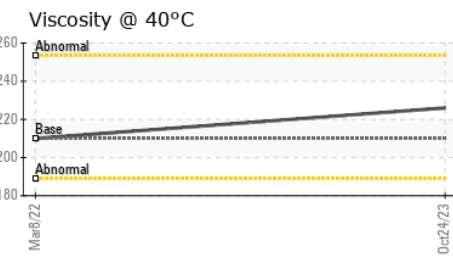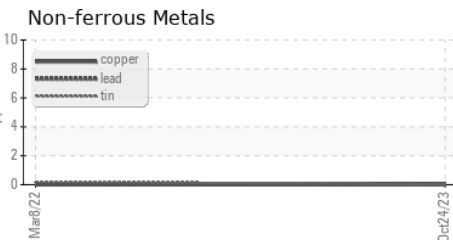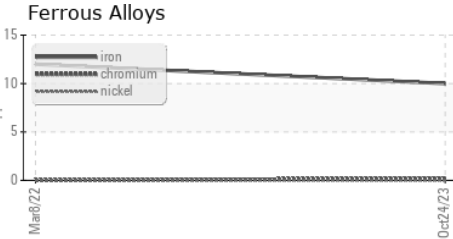

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP243996 **Received** : 14 Nov 2023
Lab Number : 06006996 **Diagnosed** : 15 Nov 2023
Unique Number : 10740758 **Diagnostician** : Doug Bogart
Test Package : IND 2

JR SIMPLOT CO
 3630 GATEWAY DR.
 GRAND FORKS, ND
 US 58201
 Contact: GREG HUDERLE
 greg.huderle@simplot.com
 T:
 F: (701)780-7880

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)