

PROBLEM SUMMARY

Sample Rating Trend

ISO




TYSVIC 03HS (S/N 00487-014-1-01-03)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

COMPONENT CONDITION SUMMARY

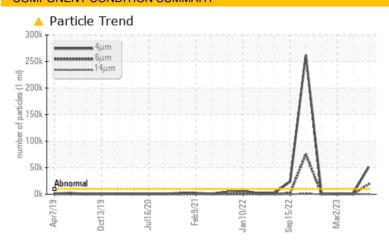

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status		ABNORMAL	NORMAL	NORMAL					
Particles >4µm	ASTM D7647 >	>10000 <u> </u>	1228	641					
Particles >6µm	ASTM D7647 >	>2500 A 18982	297	160					
Particles >14μm	ASTM D7647 >	-320 △ 630	19	10					
Particles >21μm	ASTM D7647 >	-80 🔺 115	5	2					
Oil Cleanliness	ISO 4406 (c) >	20/18/15 4 23/21/16	17/15/11	17/14/10					

Customer Id: TYSVIC01 Sample No.: USP0003470 Lab Number: 06007027 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

29 May 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



02 Mar 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

24 Jan 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



TYSVIC 03HS (S/N 00487-014-1-01-03)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		pr2019 Oc	2019 Jul2020 Feb2	021 Jan2022 Sep2022 N	Tar2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003470	USP243279	USP250587
Sample Date		Client Info		13 Nov 2023	29 May 2023	02 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	<1	<1	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	<1	0
Copper	ppm	ASTM D5185m	>8	<1	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	<1	0
Zinc		ASTM D5185m		0	0	1
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	1	1
Sodium	ppm	ASTM D5185m	00	0	<1	0
Potassium	ppm	ASTM D5185m		<1	2	0
Water	%	ASTM D6304		0.002	0.007	0.007
ppm Water	ppm	ASTM D6304	>100	23.8	78.7	79.0
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	<u> </u>	1228	641
Particles >6µm		ASTM D7647	>2500	<u> </u>	297	160
Particles >14µm		ASTM D7647	>320	△ 630	19	10
Particles >21µm		ASTM D7647	>80	<u> </u>	5	2
Particles >38µm		ASTM D7647	>20	2	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	23/21/16	17/15/11	17/14/10
ELLID DEODAD						

FLUID DEGRADATION

Acid Number (AN)

method

mg KOH/g ASTM D974 0.005

limit/base

current

0.015

history1


0.015

history2

0.015



OIL ANALYSIS REPORT

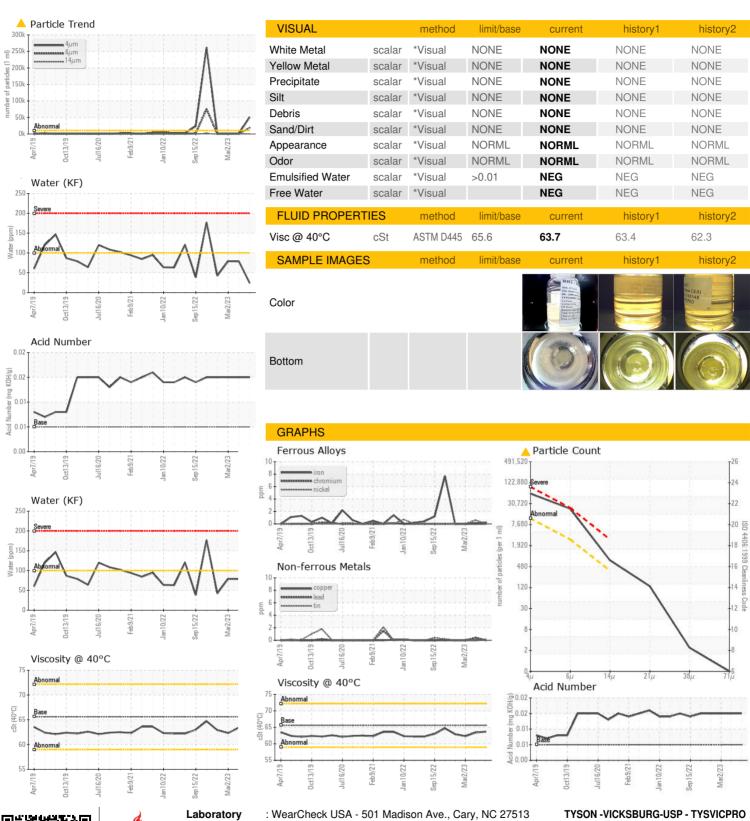



Certificate L2367

Sample No. Lab Number **Unique Number**

: USP0003470 : 06007027

: 10740789 Test Package : IND 2

Received : 14 Nov 2023 : 15 Nov 2023 Diagnosed Diagnostician : Doug Bogart

1785 INTERPLEX DR

VICKSBURG, MS US 39183

Contact: RICK DUNN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: