


## **PROBLEM SUMMARY**

#### Area IR ULTRA COOLANT Machine Id INGERSOLL RAND NL1433 - SIMONTON WINDOW Component

Compressor

#### COMPONENT CONDITION SUMMARY

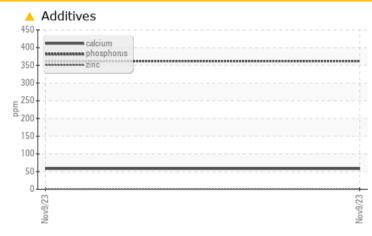

#### RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ATTENTION						
Barium	ppm	ASTM D5185m	500	<u> </u>						
Calcium	ppm	ASTM D5185m	0	<u> </u>						
Phosphorus	ppm	ASTM D5185m	20	<u> </u>						
Sulfur	ppm	ASTM D5185m	200	<b>6</b> 523						

Customer Id: UCJOHSAI Sample No.: UCH06007067 Lab Number: 06007067 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**

### IR ULTRA COOLANT **INGERSOLL RAND NL1433 - SIMONTON WINDOW** Component

Compressor

## DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type. The AN level is acceptable for this fluid.

	5011					
						$\mathbf{O}$
		-				
				Nov2023		
SAMPLE INFORM	/IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH06007067		-
Sample Date		Client Info		09 Nov 2023		
Machine Age	hrs	Client Info		70338		
Dil Age	hrs	Client Info		2000		
Dil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		-
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	<1		
lickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	1		
ead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>50	<1		
īn	ppm	ASTM D5185m	>15	1		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	500	<u> </u>		
Nolybdenum	ppm	ASTM D5185m	0	0		
Nanganese	ppm	ASTM D5185m		0		
/lagnesium	ppm	ASTM D5185m	0	1		
Calcium	ppm	ASTM D5185m	0	<u> </u>		
Phosphorus	ppm	ASTM D5185m	20	<b>A</b> 362		
Zinc	ppm	ASTM D5185m	0	<1		
Sulfur	ppm	ASTM D5185m	200	<b>6</b> 523		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		24		
Potassium	ppm	ASTM D5185m	>20	4		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.25		
VISUAL		method	limit/bases		biotom	history 0
			limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
ellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor Emulaified Water	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		


Sample Rating Trend

**ADDITIVES** 

Contact/Location: RACHEL VON HATTEN - UCJOHSAI



# **OIL ANALYSIS REPORT**

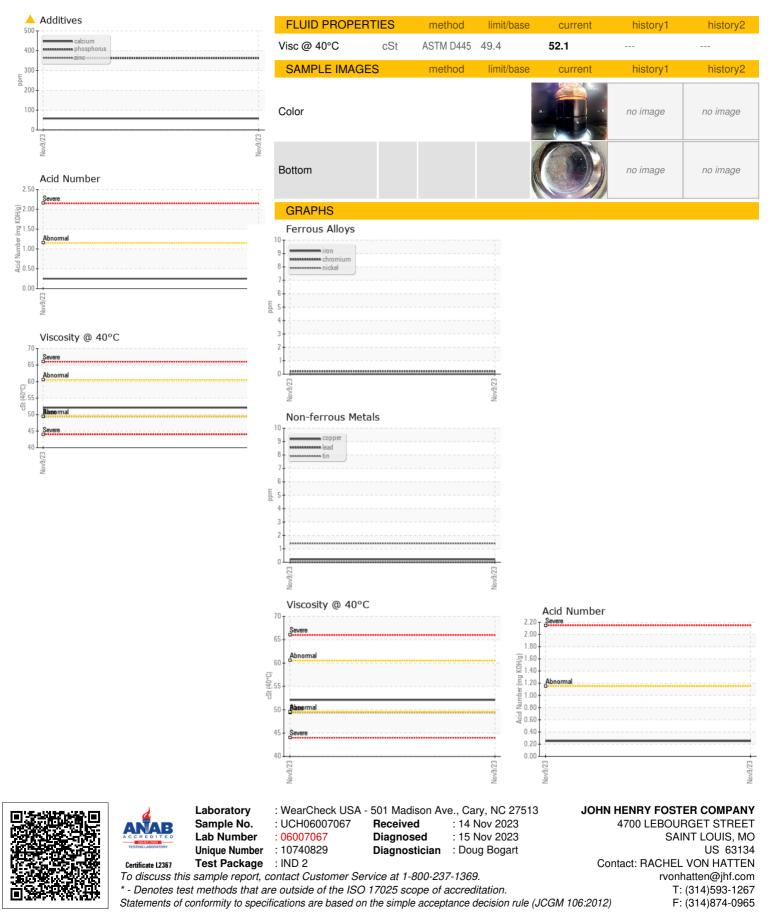

Contact/Location: RACHEL VON HATTEN - UCJOHSAI