


PROBLEM SUMMARY

Area KANSAS/44/EG - OTHER SERVICE Machine Id 57.03W [KANSAS^44^EG - OTHER SERVICE] Component

Right Reduction Gear Fluid NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

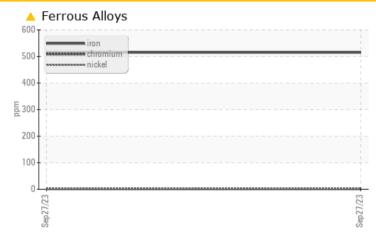

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL						
Iron	ppm	ASTM D5185m	>150	<u> </u>						


Customer Id: SHEWIC Sample No.: WC0833806 Lab Number: 06007238 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

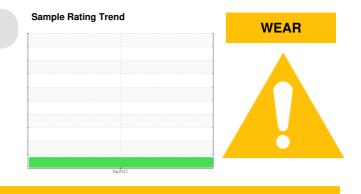

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS R

Appearance

Free Water

Visc @ 40°C

Emulsified Water

FLUID PROPERTIES

Odor

*Visual

*Visual

*Visual

*Visual

method

ASTM D445

scalar

scalar

scalar

scalar

cSt

NORML

NORML

limit/base

>0.1

NORML

NORML

current

NEG

NEG

156

Area KANSAS/44/EG - OTHER SERVIO 57.03W [KANSAS^44^EG - OTHER S Component

Right Reduction Gear NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

A Wear

Gear wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil

Fluid Condition

The condition of the oil is acceptable for the time in service.


SIS REPO		WEAR				
ERVICE	/ICE]					
			11	Sep2023		
SAMPLE INFORI	MATION	method	limit/base		history1	history2
Sample Number Sample Date Machine Age Oil Age	hrs hrs	Client Info Client Info Client Info Client Info		WC0833806 27 Sep 2023 1190 0	 	
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	6 515		
Chromium	ppm	ASTM D5185m	>10	1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	1		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		28		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		4		
Manganese	ppm	ASTM D5185m		8		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		8		
Phosphorus	ppm	ASTM D5185m		680		
Zinc Sulfur	ppm	ASTM D5185m		10		
	ppm	ASTM D5185m		10811		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	15		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	<1		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	LIGHT		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
		*) /'	NODM	NORM		

history1

history2



OIL ANALYSIS REPORT

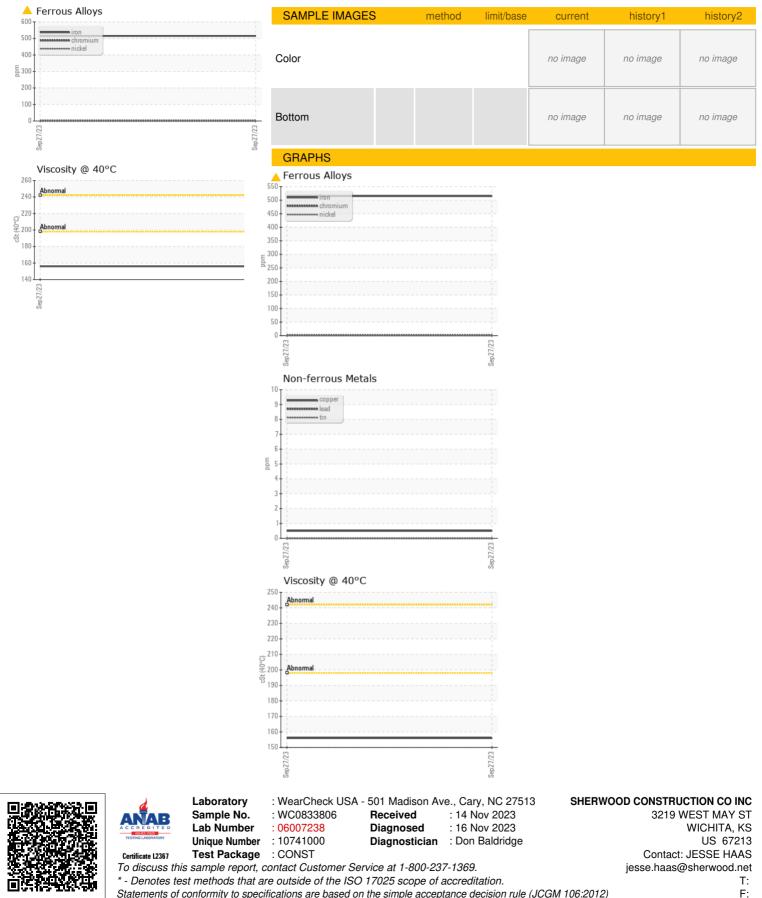

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: WENDY DUNSON